

ASSEMBLY INSTRUCTIONS & PARTS IDENTIFICATION

Hardware kit (1921-74P01)




| No | Description | Q'Ty |
|----|-------------------------|--------|
| A | Long Bolt 1/4"x 2" | 2 pcs |
| B | Short Bolt 1/4"x 1 3/8" | 10 pcs |
| C | Lock washer 5/16" | 12 pcs |
| D | Flat washer 5/16" | 12 pcs |
| E | Allen Key Ø4 | 1 pc |
| F | Wooden button | 2 pcs |

Parts Key

| No | Code | Q'Ty | Description |
|----|------|-------|-----------------|
| 1 | | 1 Pc | Table Top |
| 2 | | 2 Pcs | Leg Assembly |
| 3 | | 1 Pc | Back Stretcher |
| 4 | | 1 Pc | Upper Stretcher |
| 5 | | 4 Pcs | Floor Glide |


STEP 1

- Insert Upper Stretchers between the legs, using Flat Washer (D), Lock Washer (C) and long bolt (A).
- Tighten screws with provided Allen Key (E) by turning clockwise until secure. (See Detail A).

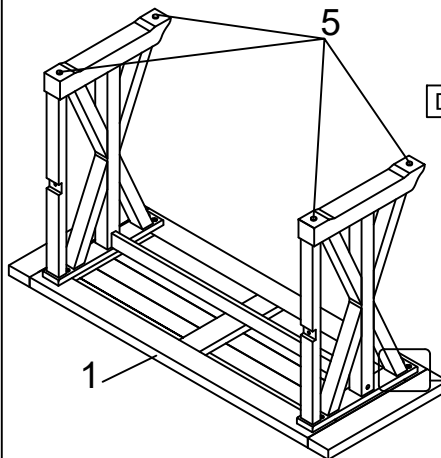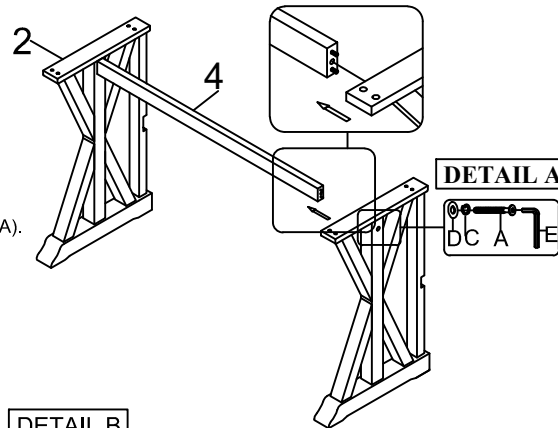


STEP 2

- Carefully lay Table Top upside down on a smooth flat surface to prevent scratches.
- Affix bottom frame to the Table Top as shown in illustration. Insert a Flat Washer (D), Lock Washer (C) and short bolt (B).
- Tighten screws with provided Allen Key (E) by turning clockwise until secure. (See Detail B).



STEP 3

- Insert Upper Stretchers between the Back Stretcher, using Flat Washer (D), Lock Washer (C) and short bolt (B) (See Detail C).
- Insert wooden button (F) to bottom frame. (See Detail D).

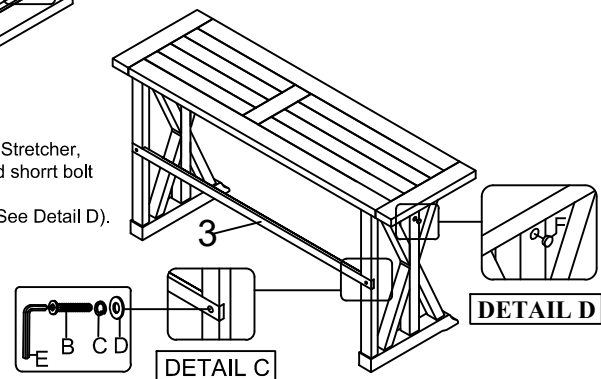


Hardware kit (1921-74P46)

| No | Description | Q'Ty |
|----|-------------------|--------|
| A | Bolt 1/4"x 2" | 24 pcs |
| B | Lock washer 5/16" | 24 pcs |
| C | Flat washer 5/16" | 24 pcs |
| D | Screw Ø4 x 38mm | 24 pcs |
| E | Allen Key Ø4 | 1 pc |

Parts Key

| No | Code | Q'Ty | Description |
|----|------|-------|-----------------------|
| 6 | | 1 pc | Complete Seat |
| 7 | | 2 pcs | Right Side Facing Leg |
| 8 | | 2 pcs | Left Side Facing Leg |
| 9 | | 2 pcs | Small Side Stretcher |
| 10 | | 2 pcs | Front/ Back Stretcher |
| 11 | | 4 pcs | Floor Glide |

FABRIC CARE INSTRUCTION REGULAR CARE
Clean with shampoo, foam, or dry cleaning solvents as desired.
Do not saturate with liquid. Pile fabrics may require brushing to restore appearance.
Cushion covers should not be removed and dry cleaned.
FABRIC CONTENT: 100% Polyester; Cleaning code "WS"

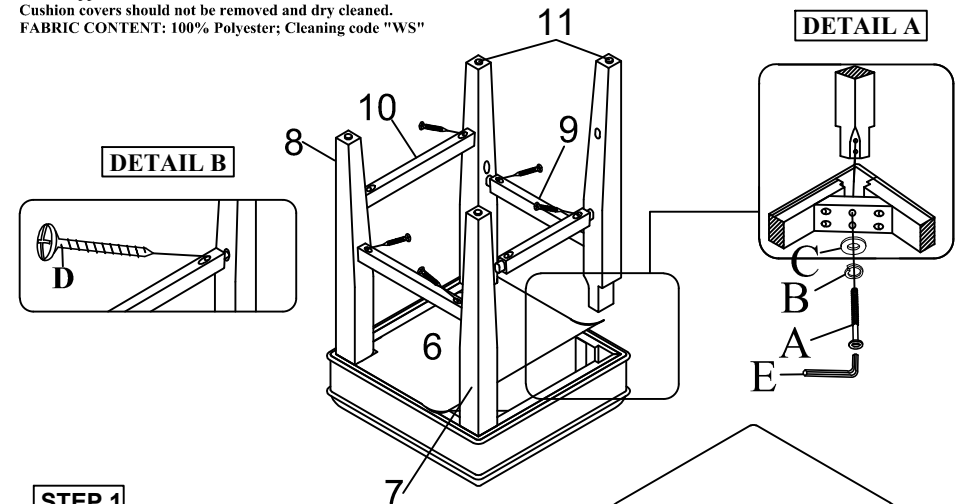

STEP 1

- Carefully lay the stool seat upside down on a smooth flat surface to prevent scratches.
- Affix a leg to each corner of the stool seat, noting the left side and right side, using a flat washer, lock washer and bolt. (See Detail A) Do not fully tighten at this point.
- Insert the 2 Long Stretchers then insert the Short Stretchers between the legs; fasten with Wood Screw using phillip-head screwdriver. (not provided). (See Detail B)
- Once all Stretchers are in place, fully tighten the bolts.

