


Assembly & Installation Instructions

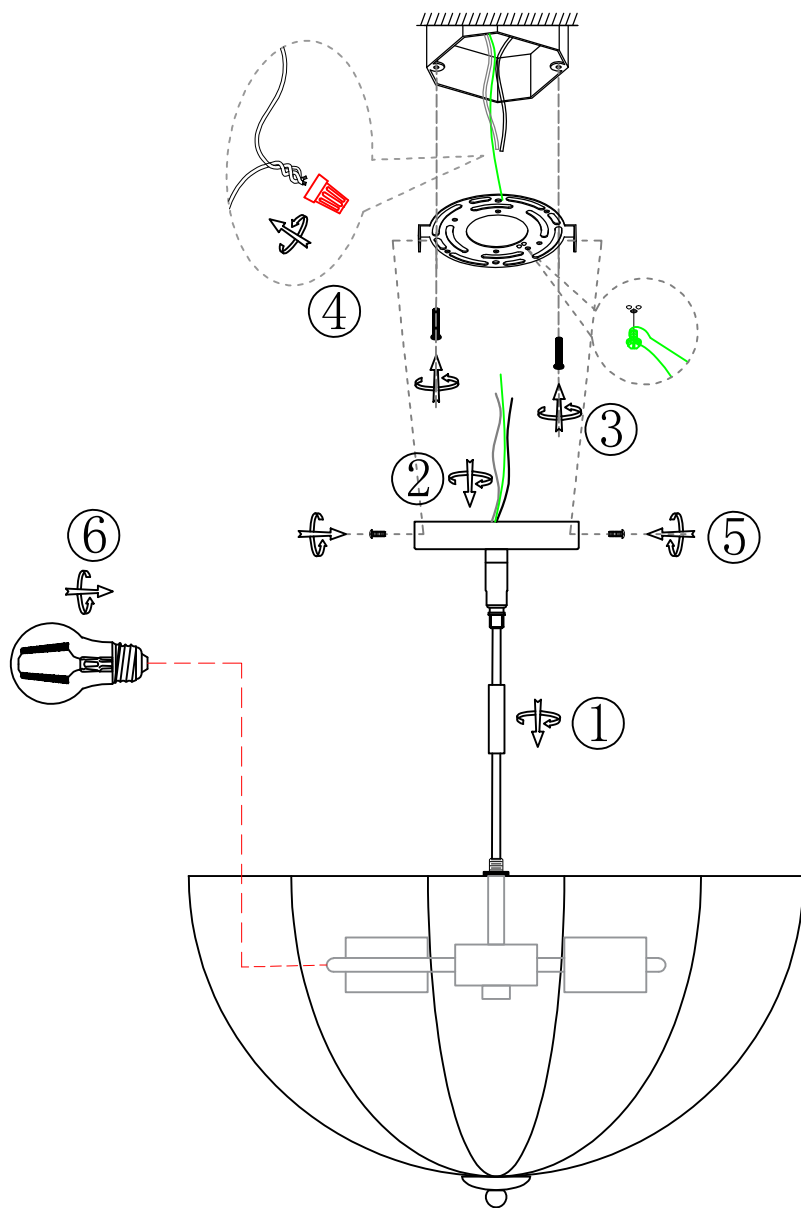

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

Step 1: Thread the Main Wire Through the Downrod

Pass the main wire through the downrod, then tighten the downrod to secure it to the fixture.

Step 2: Attach the Ceiling Canopy to the Downrod

Pass the main wire through the ceiling canopy, then tighten the canopy to secure it to the downrod.

Step 3: Install the Mounting Plate

Use the mounting plate screws to secure the mounting plate to the U.S. standard junction box.

Step 4: Connect the Wires

Using wire nuts, connect the fixture wires to the pre-installed house wiring as follows:

Black (live) wire → house hot (live) wire

White (neutral) wire → house (neutral) wire

Ground wire → house ground wire, or attach to the mounting plate using the provided green grounding screw

Caution: Ensure that no bare wires are exposed to prevent electric shock.

Step 5: Secure the Ceiling Canopy

Place the ceiling canopy over the mounting plate and tighten the screws to secure it.

Step 6: Install the Light Bulb

Screw in the appropriate light bulb (not included).

Step 7: Restore Power and Test

Turn on the power and verify that the light bulb is functioning properly.

Installation Complete