

# INSTALLATION INSTRUCTIONS

Item#N2379-732-L

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Position mounting plate (B) over ceiling and mark location of twelve holes on mounting plate (B) where plastic anchors (A) will be inserted. Drill holes into ceiling and insert plastic anchor (A).
4. Attach mounting plate (B) to the junction box (not included) with mounting screws (E) (Size: #8-32N\*L1/2"). The side of the mounting plate (B) with "GND" marked on it and two convex points must face out. And install the twelve wood screws (D) into the plastic anchors (A).
5. The support cable (F) is provided to support weight of fixture while wiring. Align fixture to mounting plate(B) and attach hook (C) on the end of support cable (F) into a slot located on mounting plate(B). Carefully allow support cable (F) to support weight of fixture while wiring.

### CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in Fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting plate (B) using green screw provided.
7. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

8. Raise canopy (G) up to ceiling and secure with the hex nuts and cap nuts (H).
9. Attached glass shade(M) up into LED shade(J) and secure with set screws(L) by using allen wrench (K). Adjust the length of cable (I) to the desired height by pushing the wire strainer(N) on canopy (G).

### Replacing LED module (Fig. 1)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig.1).

- a. Shut off the power.
- b. Loosen the set screws(L) with allen wrench (K), take off the glass shade (M) from LED shade (J). Disconnect the LED shade (J) from cable (I). Replace a new LED shade (J).

Note: The LED shade should be provided by a specified supplier.

Dimmable with ELV and/or LED compatible dimmer switches.


Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**Fig.1**

Set#A-020-520D

- Mounting plate
- Ground screw
- Wood screws(12)
- Plastic Anchors(12)
- Mounting screws(2)

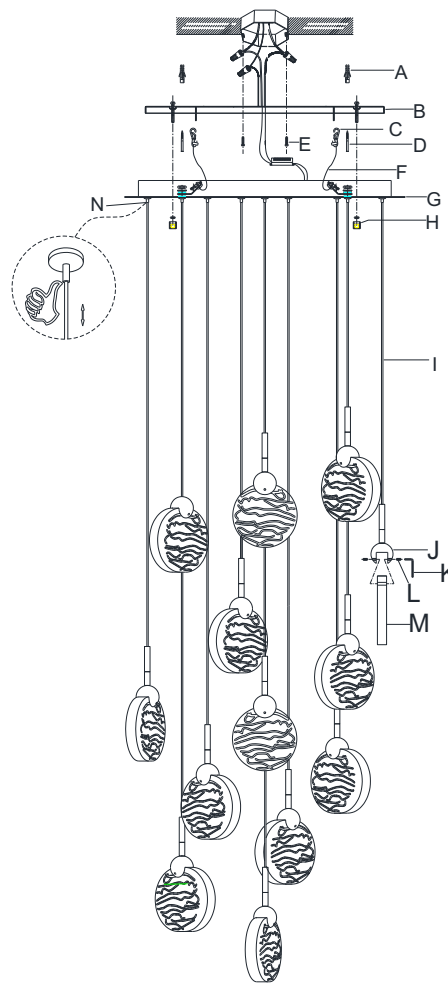

**Fig. 2**

