



5454 | K-1155-F

54" x 54" alcove bath with integral flange

Features

- Spacious design accommodates up to two bathers
- Corner layout minimizes footprint without compromising bathing area
- Integral lumbar support and armrests offer extra comfort while bathing
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Integral faucet deck



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 02:10 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

CSA B45.5/IAPMO Z124

Technical Information

All product dimensions are nominal.

Drain Location:	Center
Basin Area, Bottom:	44" x 36" (1118 mm x 914 mm)
Basin Area, Top:	56" x 43" (1422 mm x 1092 mm)
Water Depth:	15" (381 mm)
Water Capacity:	76 gal (287.7 L)
Minimum Floor Load:	35 lbs/ft ²
Weight:	51 lbs (23.1 kg)

Material

- Acrylic

Recommended Products/Accessories

K-1491 Bath/whirlpool pillow, removable
K-1601 Bath/whirlpool footstop, removable
K-23726 Drain treatment
K-23732 Tub & shower cleaner
K-7213 Cable bath drain with PVC tubing
K-7214 Cable bath drain, less PVC tubing
K-7259 Brass toe tap bath drain
K-7265 Brass toe tap bath drain

Required Products/Accessories


- K-T37392 Rotary-turn bath drain trim
 - K-T37391 Rotary-turn bath drain trim
- or
- K-78438 30" cable bath drain
 - K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing
- or
- K-78439 45" cable bath drain
 - K-37385 Rough-in cable drain, PVC, 45" cable, less horizontal tube

Warranty




See website for detailed warranty information.

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty



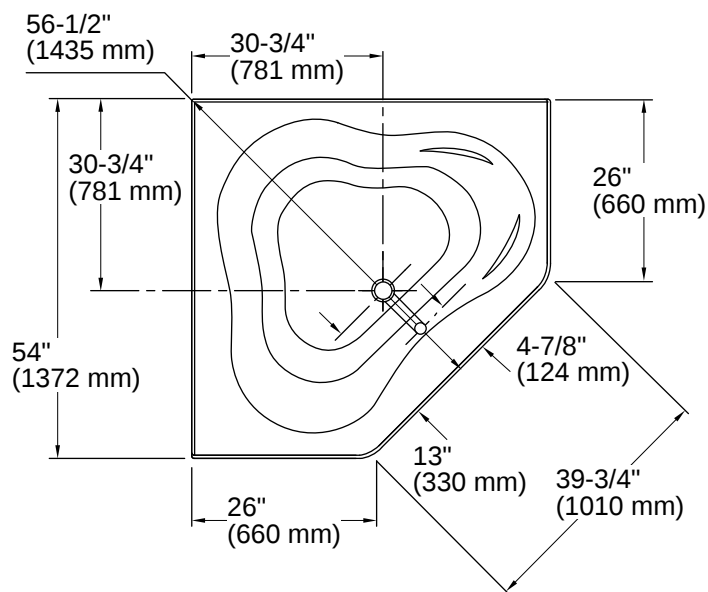

No change in measurements if connected with drain illustrated. (K-11677)

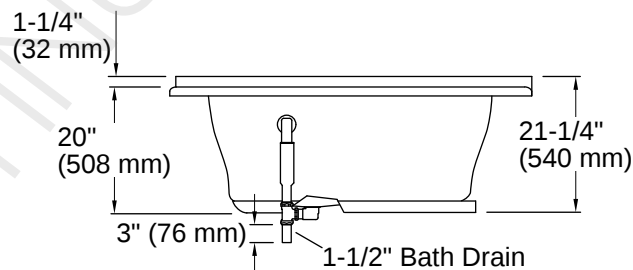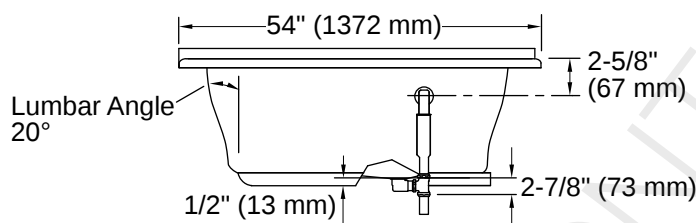

Installation

- Corner alcove

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

