





The photograph may not match the reference exactly. Please read the product description to identify the finish.

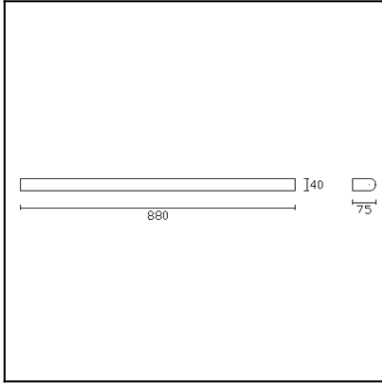


[Download photometric file .ldt /.ies](#)

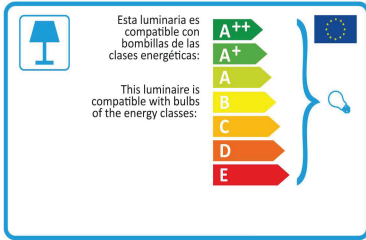

[Click on image to download energy label](#)

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	1 x G5 39W Warm White - 2700K
Voltage / Frequency:	220-240V/50-60Hz
Units per box:	8
Net Weight (Kg):	1.25



MATERIALS / FINISHES

Structure material:	Aluminium	Diffuser material:	Polycarbonate
Structure finish:	Chrome	Diffuser finish:	Matt opal


GEAR

Gear included: Yes, electronic


Luminaire		Measur.		Lamp		
Name	Aplique 1x21W T5 difusor opal	Name	Aplique 1x21W T5 difusor opal	Code	TL5 HE sup80 21W/840	
Line	Eulumdat			Number	1	
				Position		
Efficiency	43.37%	Coordinate system	CG	Total Flux	1900.00 lm	
Maximum value	131.99 cd	Position	C=0.00 G=60.00	Double Symmetrical		
Rectangular Luminaire	Length	880 mm	Width	38 mm	Height	77 mm
Rectangular Luminous Area	Length	865 mm	Width	36 mm	Height	36 mm
Horizontal Luminous Area	0.031140 m2	Emitting area on Plane 180°		0.031140 m2		
Emitting area on Plane 0°	0.031140 m2	Emitting area on Plane 270°		0.001296 m2		
Emitting area on Plane 90°	0.001296 m2	Glare area at 76°		0.037748 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		1900.00 lm		
Operator		Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						


Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	TL5 HE sup80 21W/840	TL5 HE sup80 21W/840 - 21.00 W	1900.00	21.00	1	
C.I.E.	28 55 79 70 43	D DIN 5040				
F UTE	0.30 J + 0.13 T	B NBN				
		B11				
		BZ 7				

880mm x 38mm

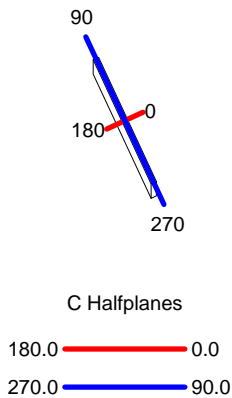

ULOR 12.95 %
DLOR 30.42 %
RN 29.86 %

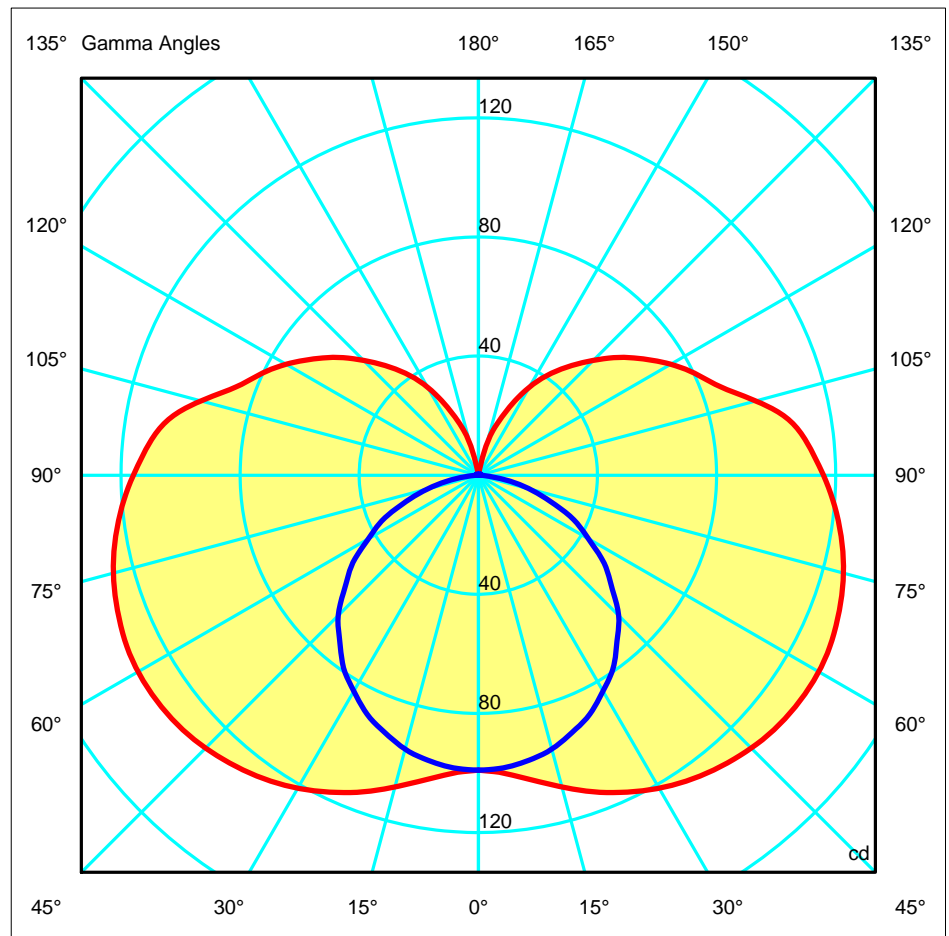

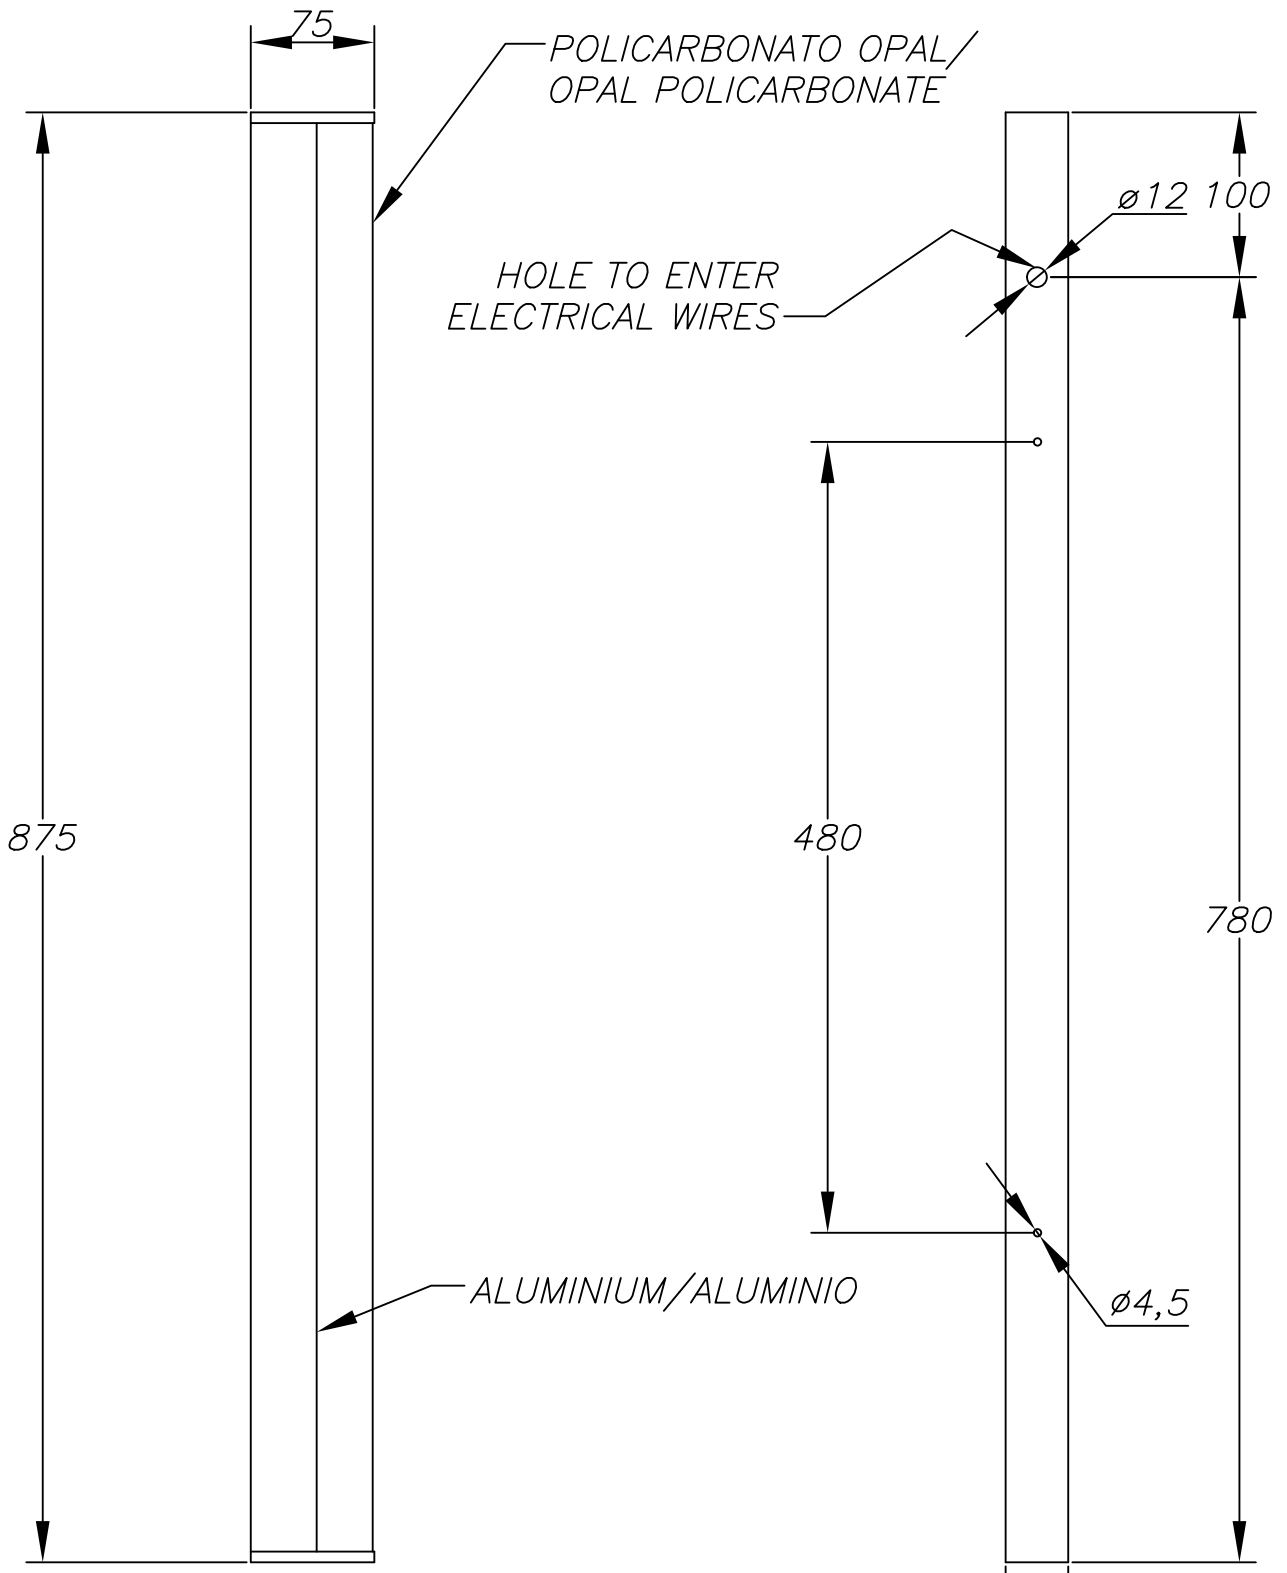

875

75

POLICARBONATO OPAL /
OPAL POLICARBONATE

HOLE TO ENTER
ELECTRICAL WIRES

ø12 100

480

780

ALUMINIUM / ALUMINIO

ø4,5

STEEL / ACERO

38

38

40 35

