


FILAMENT

A-SHAPE

A-15, A-19

4W & 8W

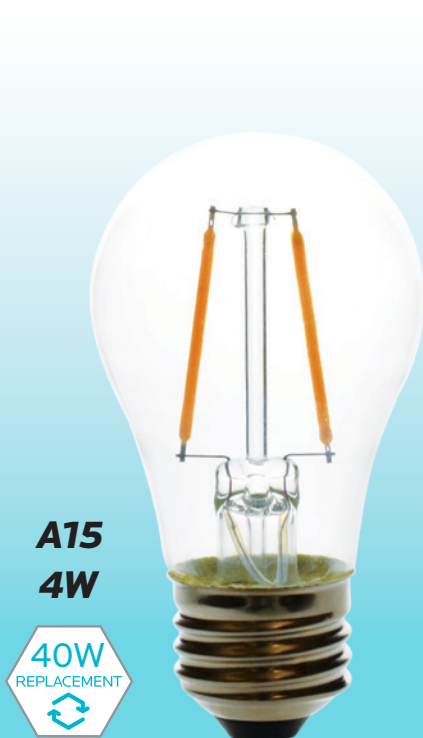

SPECIFICATIONS

ELECTRICAL


	MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	EFFICACY (LPW)	FREQUENCY	LIFETIME	WATT REPLACEMENT
A15	LR21623	LED4A15/CL/27K/D	4	120V	YES	88	60Hz	10,000	40W
	LR21612	LED8A19/CL/27K/D	8	120V	YES	100	60Hz	10,000	60W
A19	LR21613	LED8A19/CL/30K/D	8	120V	YES	100	60Hz	10,000	60W
	LR21614	LED8A19/CL/50K/D	8	120V	YES	100	60Hz	10,000	60W

PHOTOMETRIC

MODEL	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	CASE	COST/YR	BASE TYPE	FINISH
LR21623	2700K	WARM WHITE	350	330°	80	50	\$ 0.48	E26	CLEAR
LR21612	2700K	WARM WHITE	800	330°	80	50	\$ 0.96	E26	CLEAR
LR21613	3000K	SOFT WHITE	800	330°	80	50	\$ 0.96	E26	CLEAR
LR21614	5000K	COOL WHITE	800	330°	80	50	\$ 0.96	E26	CLEAR

GENERAL

DIMENSIONS

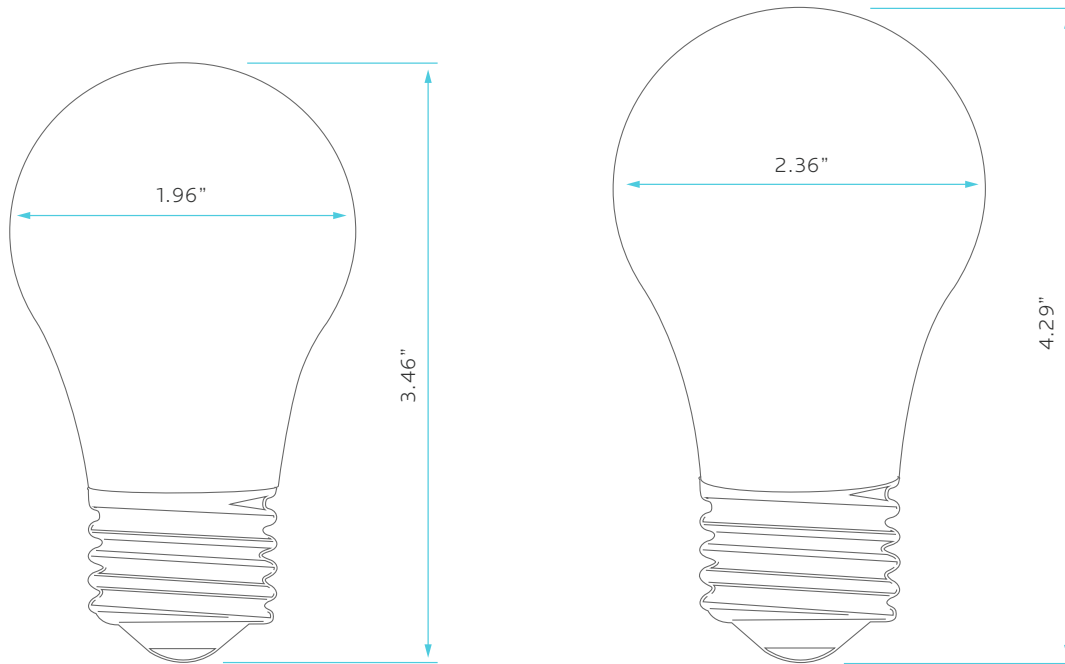

A15

A19