



Sunward®
Bath Whirlpool
K-1162-S1

Features

- 60" (1524 mm) x 42" (1067 mm) x 20" (508 mm)
- Six individually adjustable ProFlex whirlpool jets
- Innovative technology enables this pump to provide a strong, steady level of hydro-massage
- Multiple faucet mounting locations for maximum flexibility in faucet placement

Material

- ExoCrylic™

Installation

- Drop-in installation with end drain location



Codes/Standards




ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
UL 1795


KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond

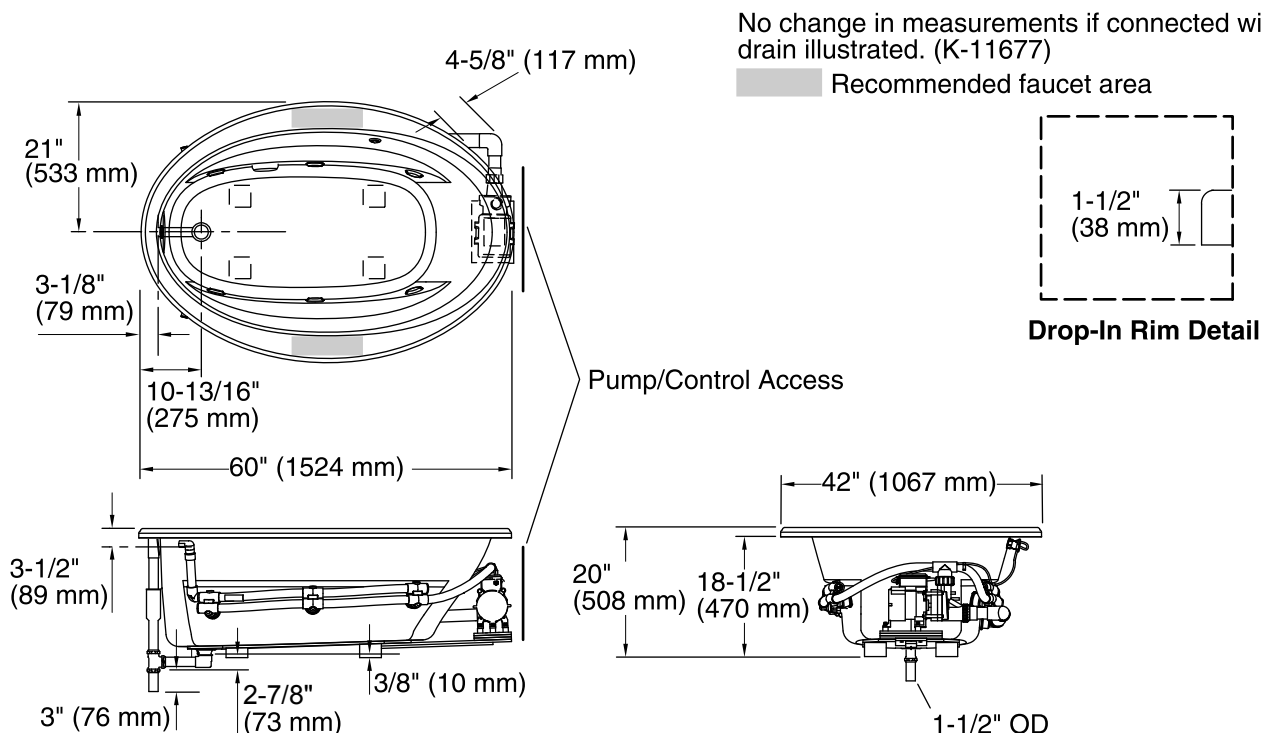

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in
Drain location: Reversible
Basin area, bottom: 43" x 21-9/16" (1092 mm x 548 mm)
Basin area, top: 53-1/2" x 32-1/8" (1359 mm x 816 mm)
Weight: 110 lbs (49.9 kg)
Minimum floor load: 35 lbs/ft² (170.9 kg/m²)
Water depth: 15" (381 mm)
Water capacity: 57 gal (215.8 L)
Template: Drop-in, 1042556-7, not required, not included
Under-mount kit: K-576
Electrical rating: Pump: 120 V, 7.5 A, 60 Hz

Notes

Install this product according to the installation guide.

The suction line extends 4-5/8" (117 mm) beyond the edge of the rim. The pump base extends 1/8" (3 mm) beyond the edge of the rim. Modify the framing as needed.