





8237PL-01BG-US



1

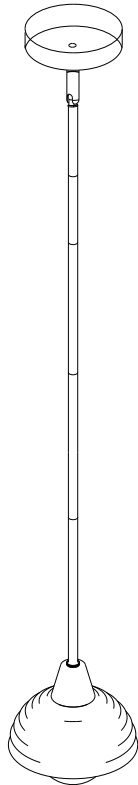

10

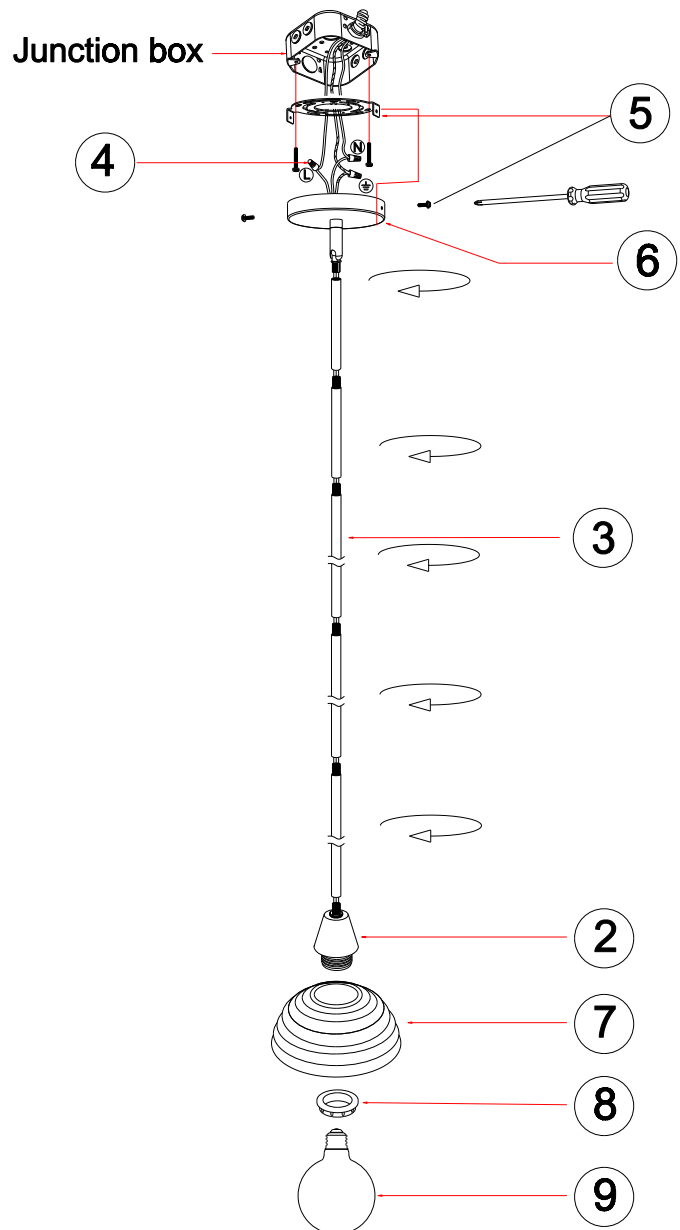

- 1 : Shut down the power.
- 2 : Take out the individual lamp cap from the packaging, and the wires will hang freely.
- 3 : Pass the $\varnothing 16$ pipe through the wire one by one and tighten it (the two short pipes on top, the three long pipes at the bottom), then insert it into the central part of the single light bulb.
- 4 : Tighten the wiring end cover in the correct manner
- 5 : Tighten and fix the installation plate onto the junction box, and then secure the screws on both sides of the ceiling.
- 6 : Pass the universal head under the ceiling plate through the wire and insert it into the pipe (the two short tubes above and the three long tubes below)
- 7 : Insert the lampshade into the lamp base.
- 8 : Use the lamp head ring to lock the lampshade in place
- 9 : Insert the E26 "G" bulb into the lamp socket.
- 10 : Turn on the main power supply, and the lights will come on.