Installation manual for: D28" H24" L6

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws（P2） in side of top unit the mounting bracket.
6. Place the top suction plate(P3) on the hanging plate (P1) and screw(P4) tightly.
7. Install E26 light source,no include bulb.
8. Place the glass cover (P13),(P18) on the semicircular cover (P9),(P14).

The end!

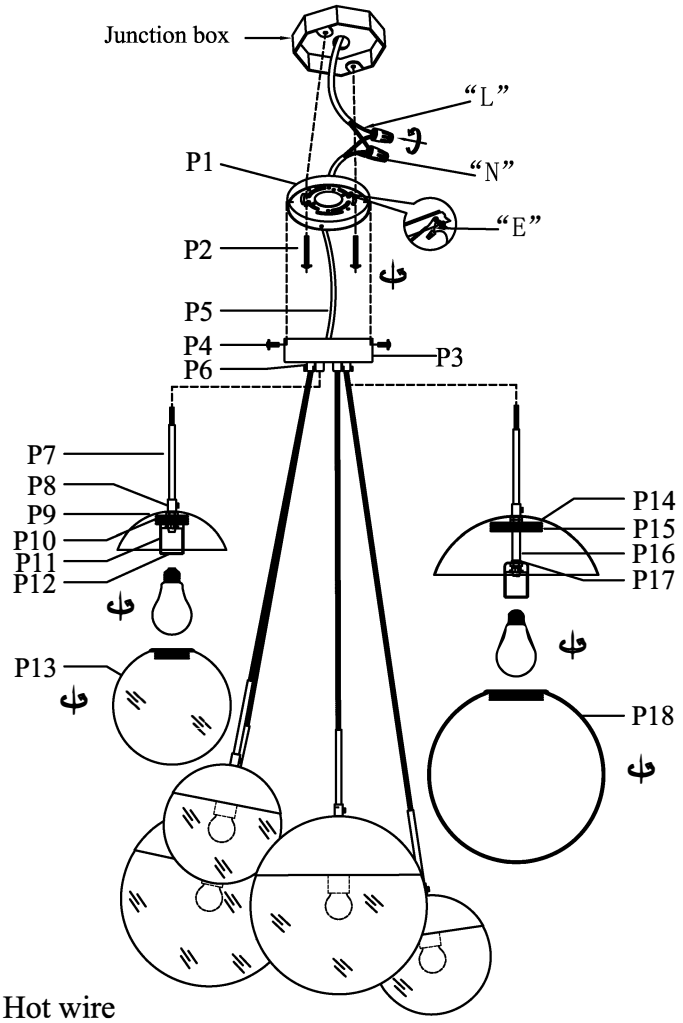

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

PARTS LIST

part	picture	Description	Qty	Check list
P1		D5.5″ Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		D6″ Canopy plat	1	
P4		5/32-32 Screw	2	
P5		Power Cord 1' Black	1	
P6		Car iron parts	6	
P7		L5.24″Tube	6	
P8		Coupling	6	
P9		D7.28″ Semicircular cover	3	
P10		D2.16″ Screw die	3	
P11		Socket cover	6	
P12		E26 Socket	6	
P13		D8″ Clear Glass	3	
P14		D11″ Semicircular cover	3	
P15		D3.5″ Screw die	3	
P16		L2.56″ Candle cover	3	
P17		Check ring	6	
P18		D12″ Clear Glass	3	