



# Assembly Instruction

**WARNING!** PLEASE PLACE ALL THE PRODUCTS AT ROOM TEMPERATURE. DO NOT STORE BIDETS AND ITS ACCESSORIES IN FREEZING TEMPERATURE ENVIRONMENT BELOW 32 DEGREE FARENHEIT.


## 1. NAMES AND FUNCTIONS OF ACCESSORIES

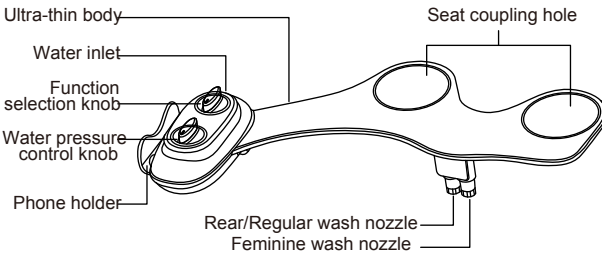

### Accessories



### Installation Tools Needed(Not included)




## 2.INSTALLATION


### PREPARATION

- 1.Remove the existing toilet seat .
- 2.Turn off the water valve.
- 3.Flush toilet to drain tank completely.
- 4.Disconnect exiting water pipe
5. Attach adapter to water valve pipe and exiting water pipe,use teflon tape.


### Installation

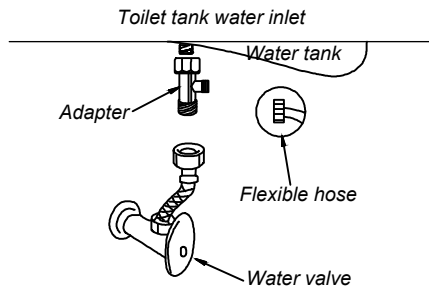

**3. INSERT THE RUBBER NON-SLIP MATS TO THE BOTTOM OF THE BIDET AND PLACE THE CIRCULAR MOUNTING BRACKETS INTO THE BIDET ATTACHMENT**

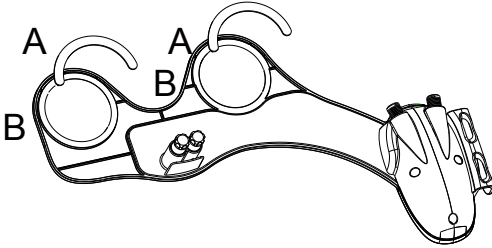


Install bidet onto toilet bowl.  
Adjust to suitable position.

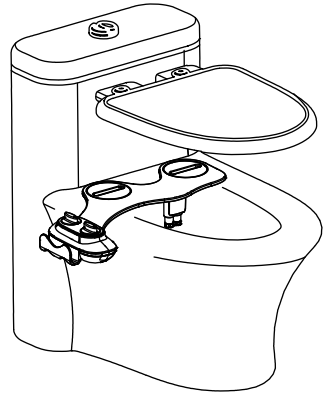


**4. FINAL ASSEMBLED FIGURE**

Attach flexible hose to the adapter and bidet  
Turn on water valve to use.

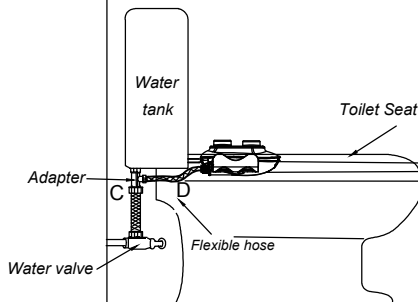

**TROUBLE SHOOTING**

*Twin Nozzle system*



*If your spray outlet hole is clogged for some reason,  
simply move spray outlet up and down few times manually.*



**HELPFUL TIP:**

*Over tightening can cause damage to the threads and result in water leakage.  
Use only hand pressure first and check for any leakage.  
Turn only less than quarter turn at a time making sure there is no leakage.*