

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** GY

**Supplier's address:** eVatmaster Consulting GmbH, Raiffeisen Street 2B 11, 63110 Rodgau, Hessen, Germany

**Model identifier:** ACG65D4

## Type of light source:

|                                                     |      |                                 |     |
|-----------------------------------------------------|------|---------------------------------|-----|
| Lighting technology used:                           | LED  | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | GU10 |                                 |     |
| Mains or non-mains:                                 | MLS  | Connected light source (CLS):   | No  |
| Colour-tuneable light source:                       | No   | Envelope:                       | -   |
| High luminance light source:                        | No   |                                 |     |
| Anti-glare shield:                                  | No   | Dimmable:                       | No  |

## Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|


### General product parameters:

|                                                                                                                                                       |                            |                                                                                                                                                            |                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                         | 7                          | Energy efficiency class                                                                                                                                    | B                      |
| Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 1 025 in Narrow cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000                  |
| On-mode power ( $P_{\text{on}}$ ), expressed in W                                                                                                     | 6,5                        | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal                                                                        | -                      |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                          | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 80                     |
| Outer dimensions without separate control gear, light-                                                                                                | Height                     | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                       | Width                      |                                                                                                                                                            |                        |
|                                                                                                                                                       | Depth                      |                                                                                                                                                            |                        |


|                                                                                                                         |       |                                                                    |                |  |
|-------------------------------------------------------------------------------------------------------------------------|-------|--------------------------------------------------------------------|----------------|--|
| ing control parts and non-lighting control parts, if any (millimetre)                                                   |       |                                                                    |                |  |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -     | If yes, equivalent power (W)                                       | -              |  |
|                                                                                                                         |       | Chromaticity coordinates (x and y)                                 | 0,380<br>0,380 |  |
| <b>Parameters for directional light sources:</b>                                                                        |       |                                                                    |                |  |
| Peak luminous intensity (cd)                                                                                            | 2 000 | Beam angle in degrees, or the range of beam angles that can be set | 36             |  |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |       |                                                                    |                |  |
| R9 colour rendering index value                                                                                         | 0     | Survival factor                                                    | 0,90           |  |
| the lumen maintenance factor                                                                                            | 0,96  |                                                                    |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |       |                                                                    |                |  |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,50  | Colour consistency in McAdam ellipses                              | 6              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b)  | If yes then replacement claim (W)                                  | -              |  |
| Flicker metric (Pst LM)                                                                                                 | 1,0   | Stroboscopic effect metric (SVM)                                   | 0,4            |  |

(a) '-': not applicable;

(b) '-': not applicable;

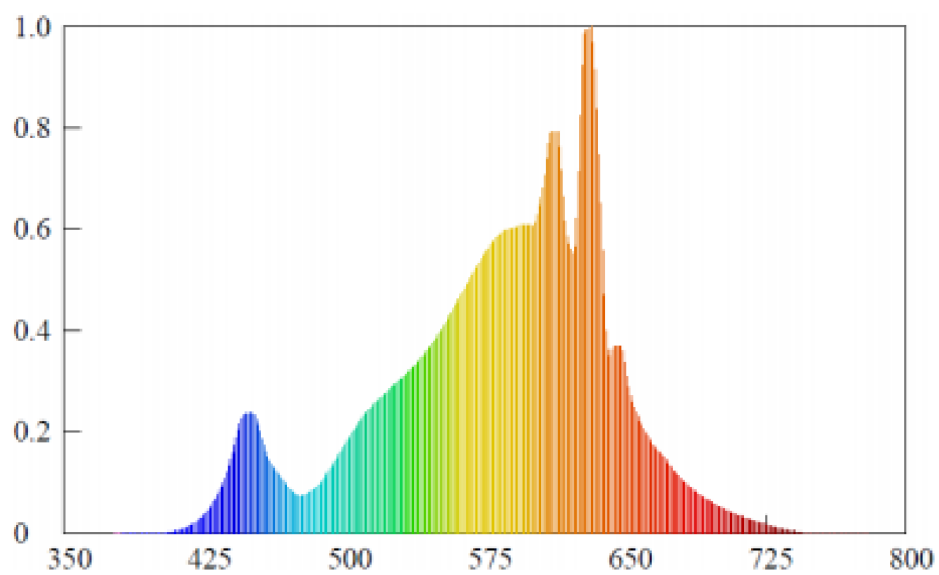

Model placed on the Union market from 14/04/2025



**EPREL registration number:** 2328828

<https://eprel.ec.europa.eu/qr/2328828>

**Supplier:** REP Europe GmbH (Authorised representative)

**Website:** [www.rep-europe.de](http://www.rep-europe.de)

**Customer care service:**

**Name:** eVatmaster Consulting GmbH

**Website:**

**Email:** [contact@evatmaster.com](mailto:contact@evatmaster.com)

**Phone:** +496995179070

**Address:**

Raiffeisen Street 2B11, 63110 Rodgau, Hessen, Germany