



Product Installation Instructions

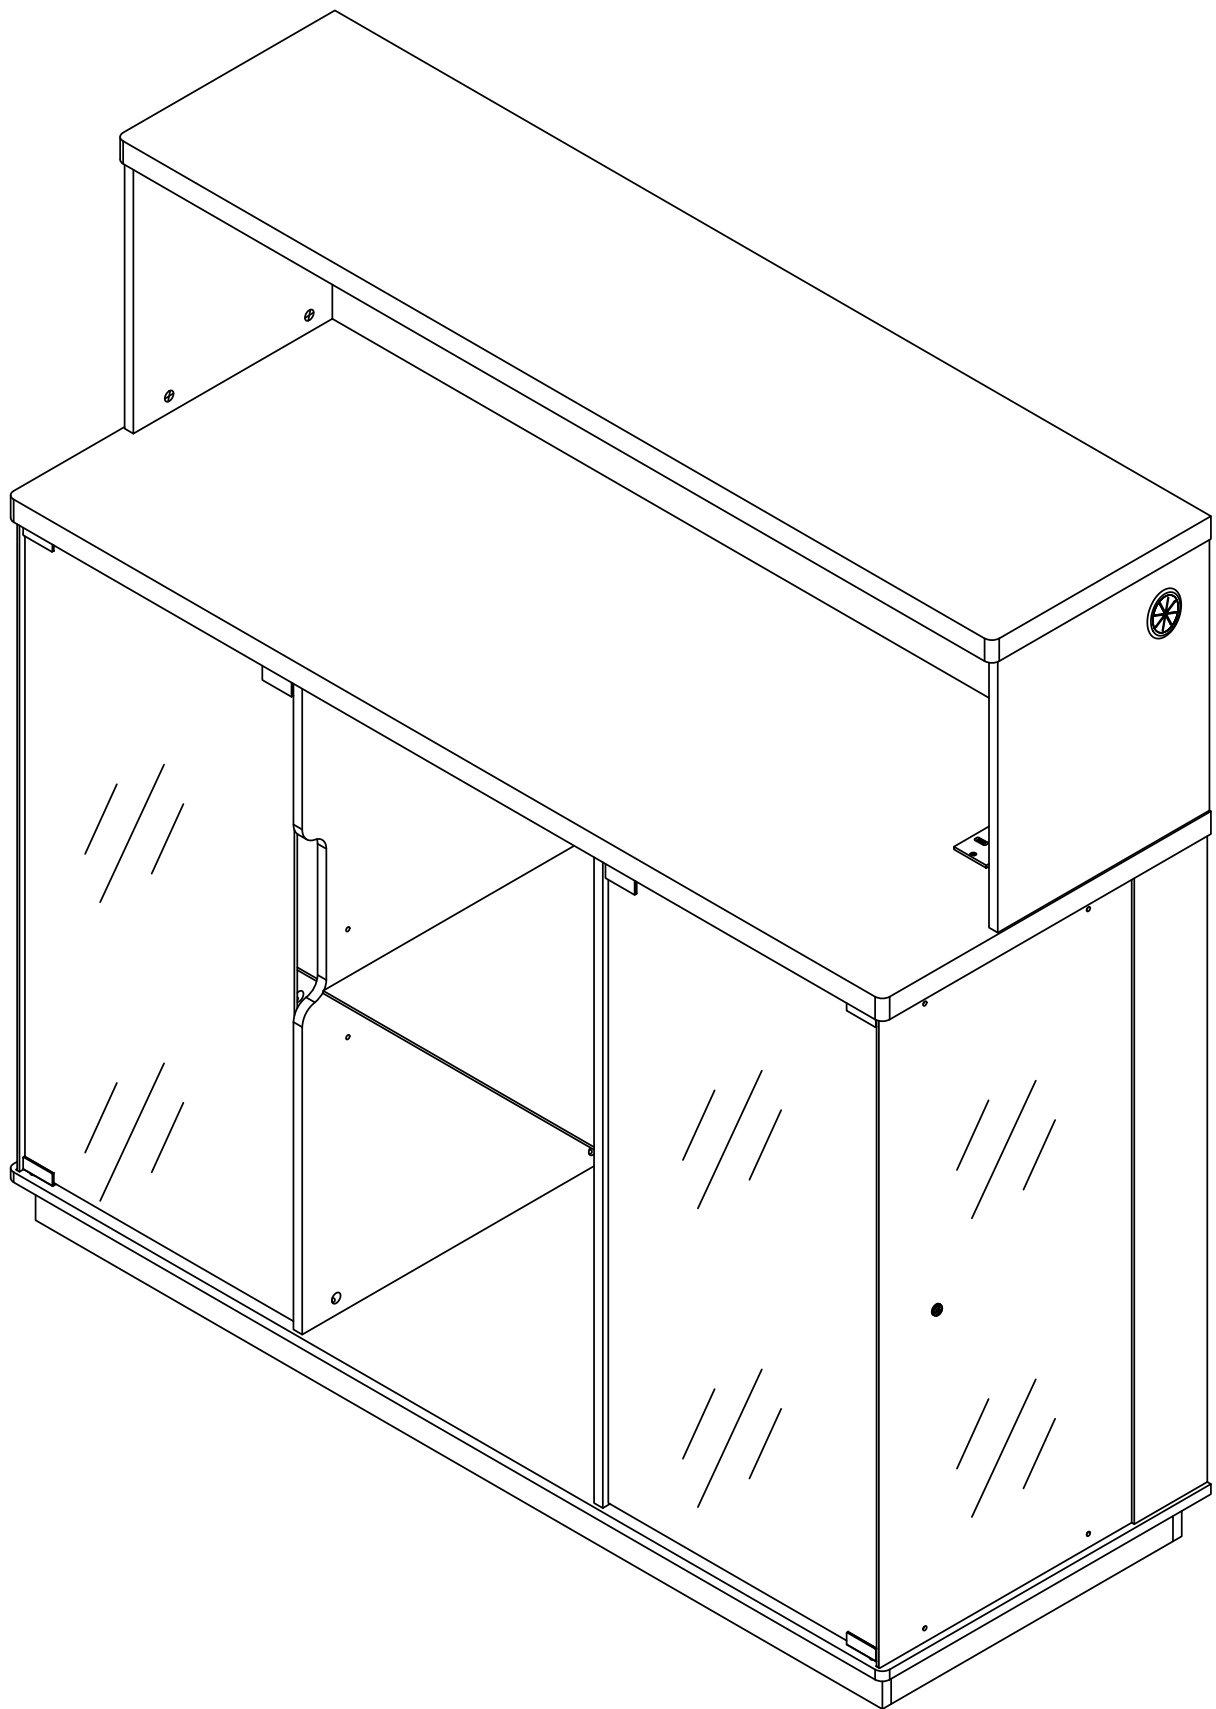

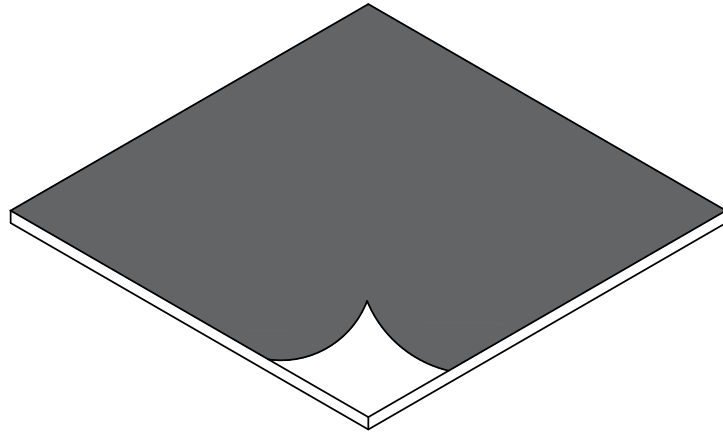


The plates used in this product are bright plates,

With a transparent protective film


The function of the protective film is prevent the product from
being scratched during transportation

Please remove the protective film before installing the product,


Avoid difficult removal of the protective film after installation

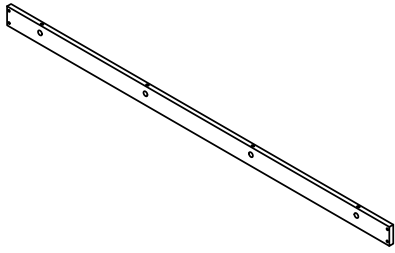

Ax2




Bx2

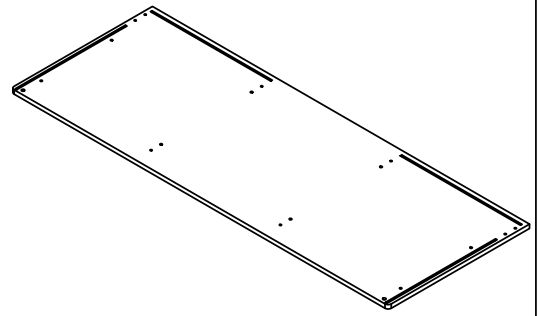


Cx1




Dx2




Ex1

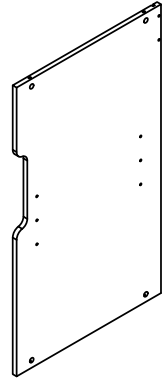


Fx1




Gx2




Hx1




Ix2




Jx1




Kx1

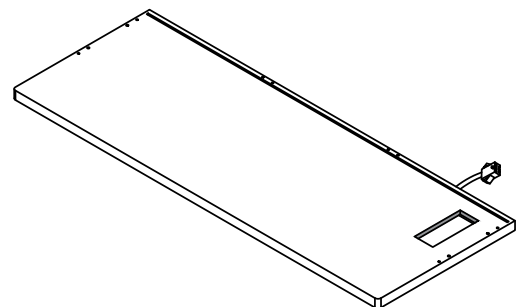


Lx1




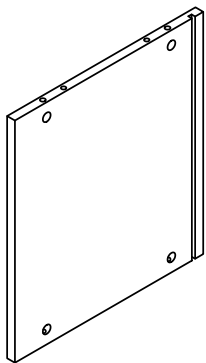


Mx1




Nx1




Ox2




Px1

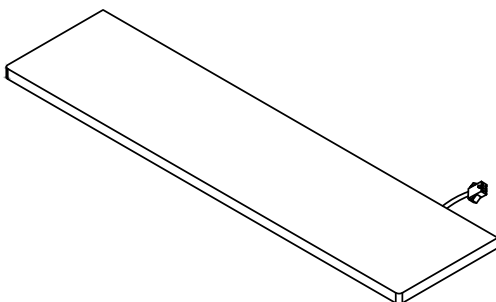


Qx1



Rx2







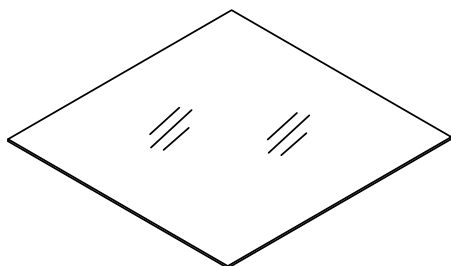




Sx1




Tx2

Accessories list

①		Two In One Screw (6x28mm)	66pcs +6pcs
②		Two In One Nut (10x12mm)	66pcs +6pcs
③		Wood Chipping (6x30mm)	12pcs +2pcs
④		Wire cover	1pcs
⑤		Corner Bracket, Screw (4x8mm)	8pcs +2pcs
⑥		Rebound device & Screw (3x16mm)	8pcs +2pcs
		Iron sheet	2pcs
		Hinge	4pcs 2pcs 2pcs
⑦		Non-slip pads (50x10x2mm)	10pcs +2pcs
⑧		Laminate support nail	10pcs +2pcs
⑨		Fixing clip & screw (3x16mm)	20pcs +4pcs
⑩		Wine glass rack & Screw (4x16mm)	8pcs +2pcs 4pcs
⑪		Power strip screw (4x12mm)	2pcs +1pcs 1pcs
⑫		Laminate Support Nail & Screw (6x16mm)	2pcs +1pcs
⑬		Screw (4x8mm)	8pcs +2pcs
⑭	Anti tipping hardware  x2  (3.5x12mm) x2  x4  (4x45mm) x2  x2		

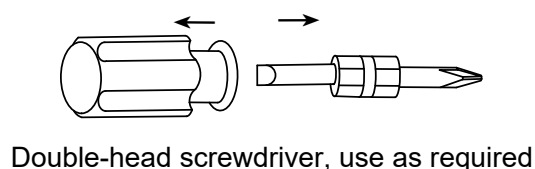


Product structure decomposition

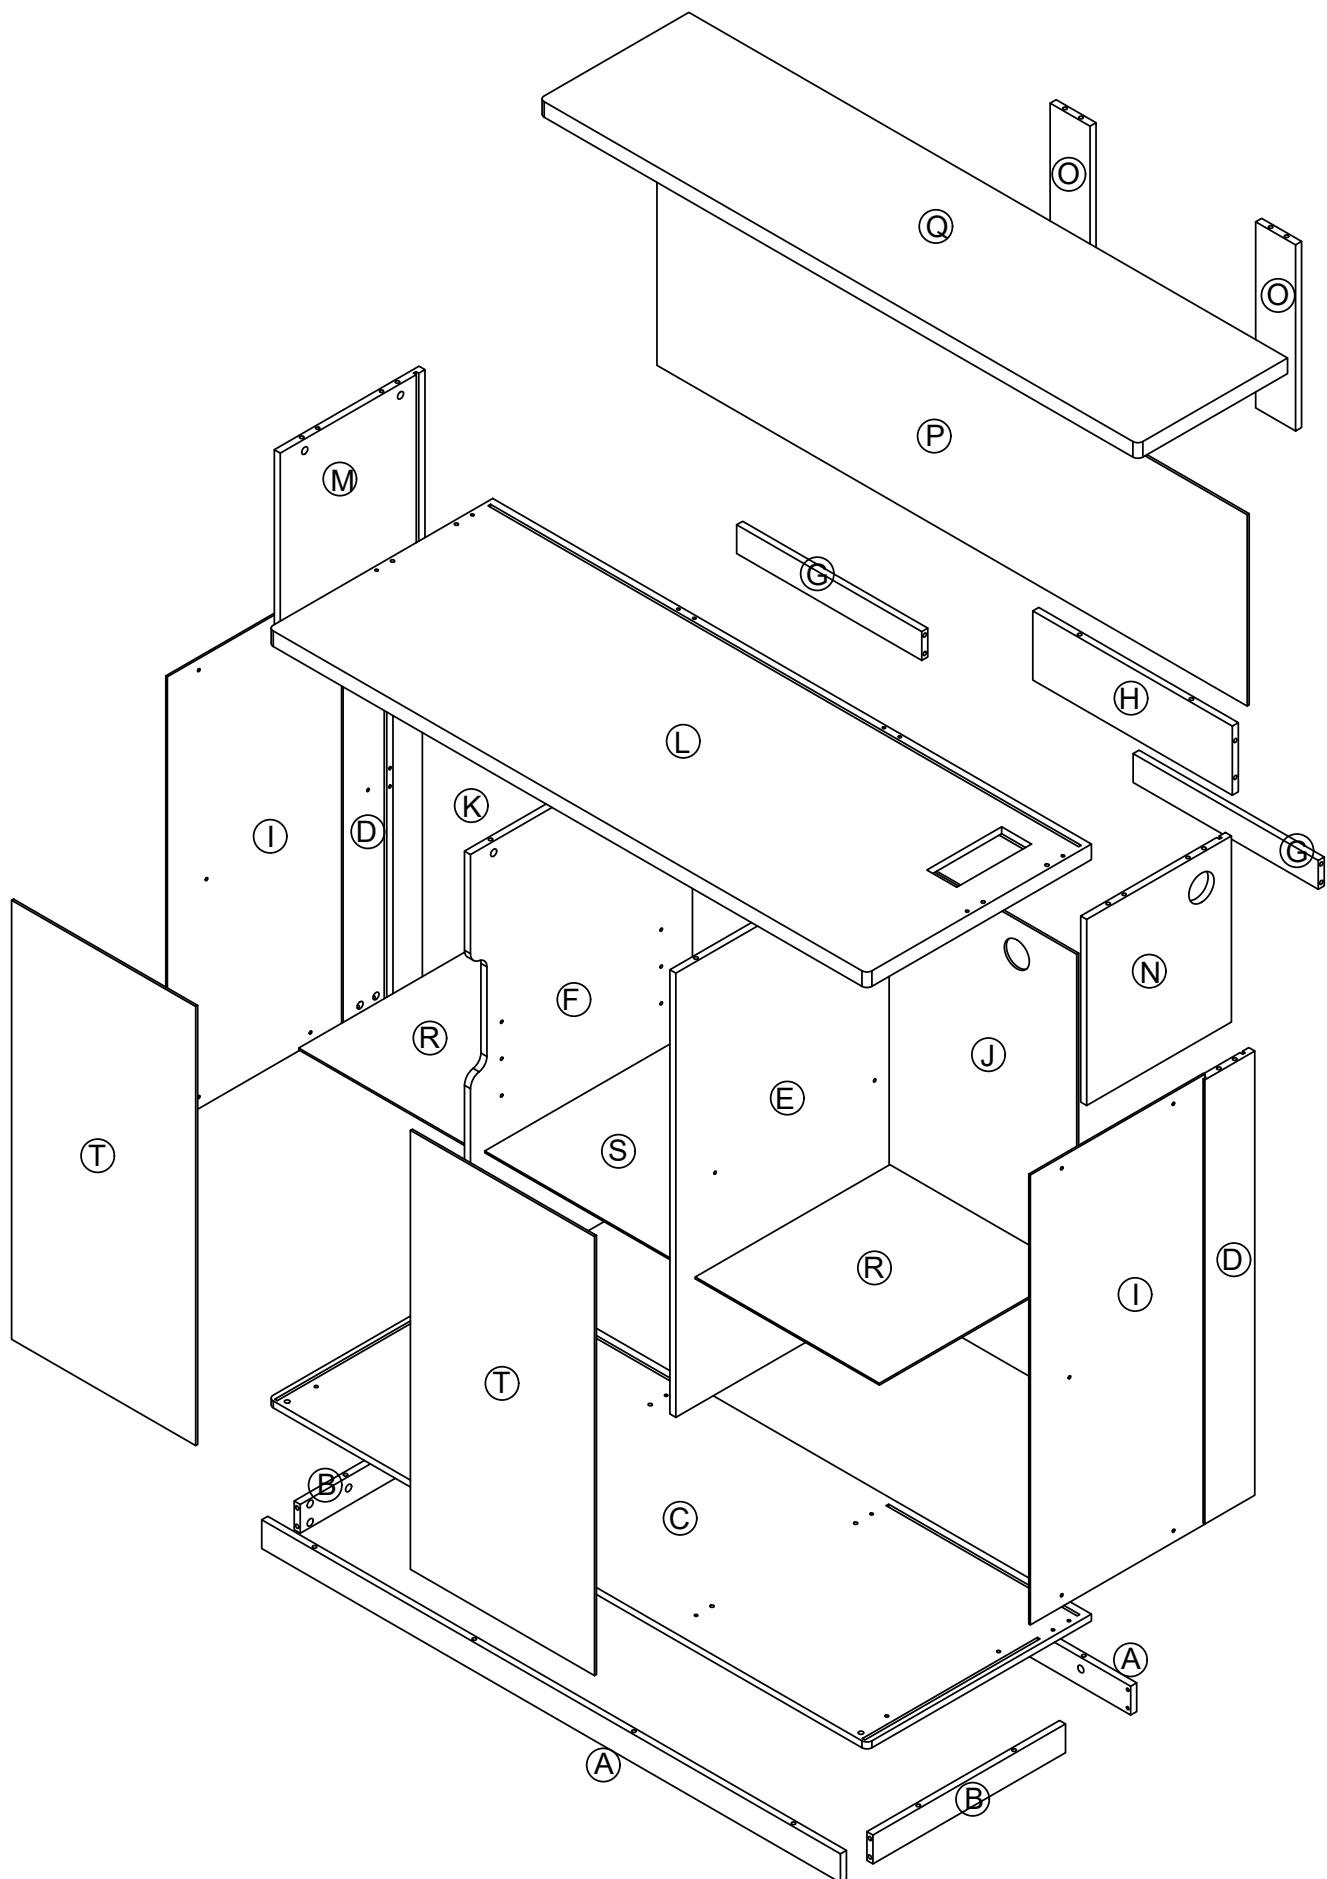


Use parts ① and ②



Step1

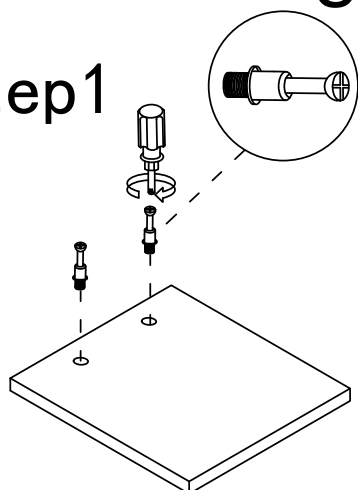


Step2

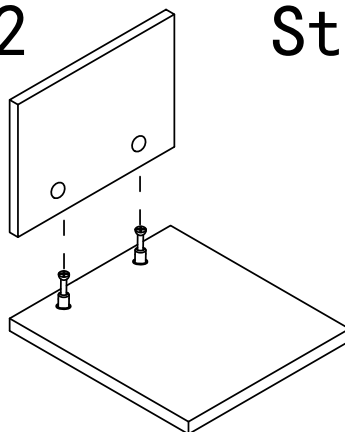

Step3

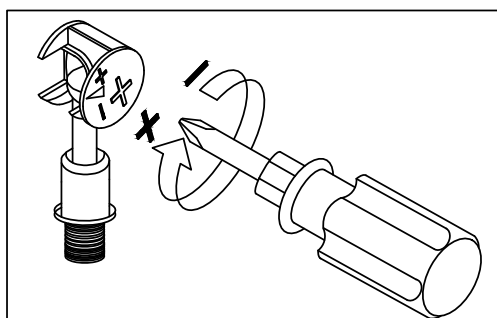
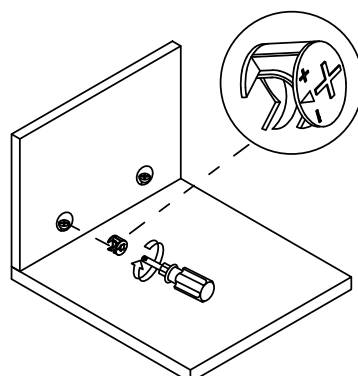


Use a screwdriver to lock in the direction of the "+" sign

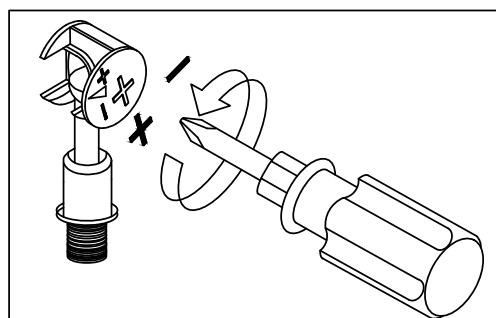



Disassemble along the direction of "-" sign

Step 1

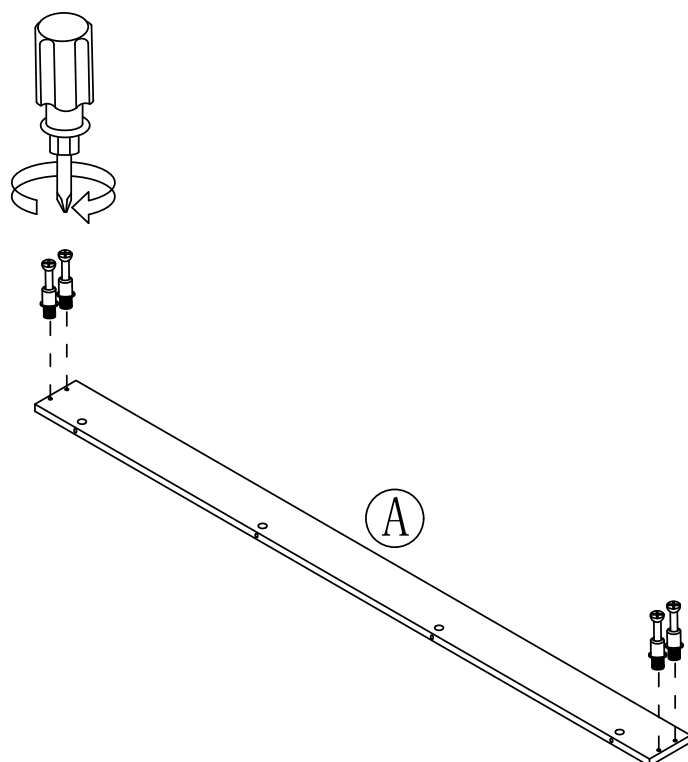



X2

Step 2

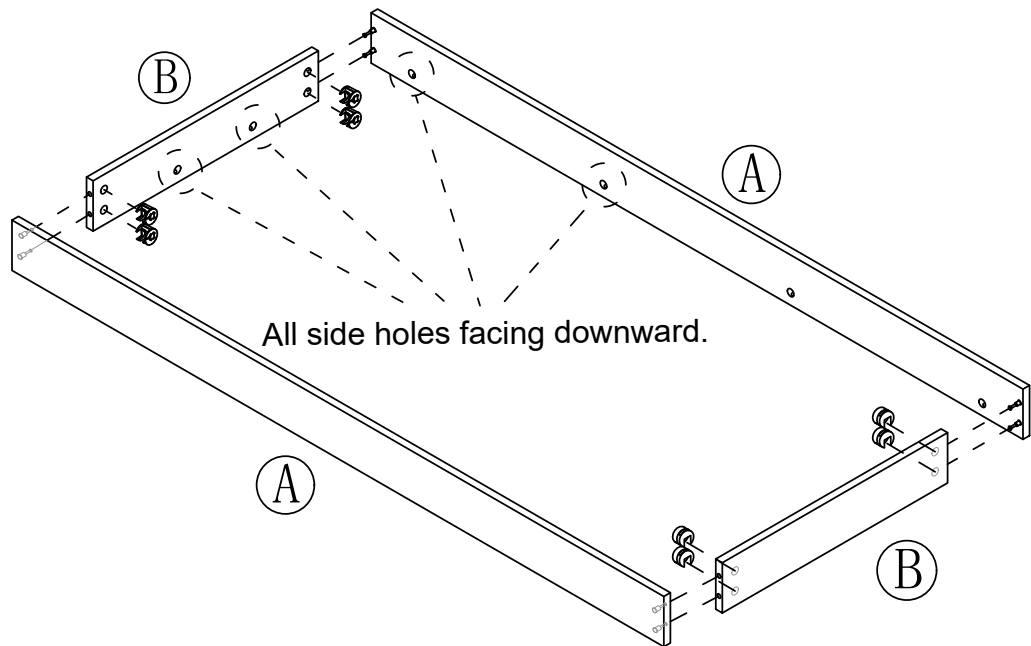

Step 3

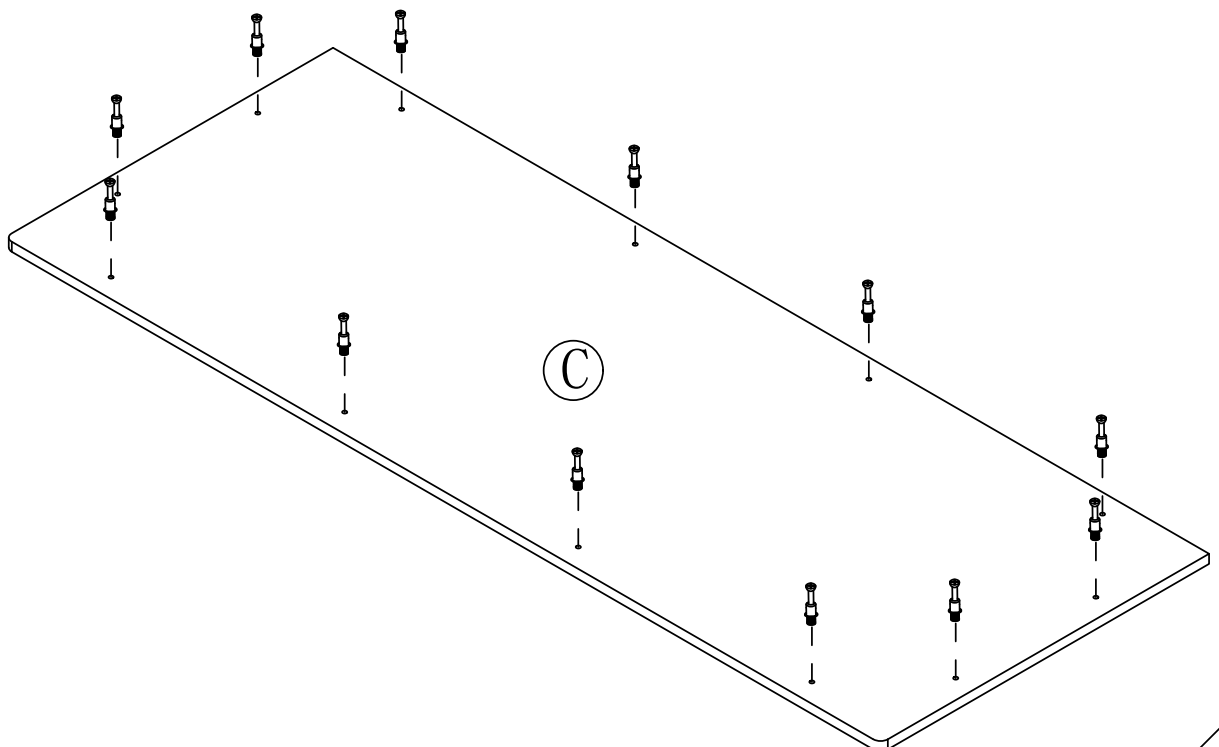


Step4

②




x12

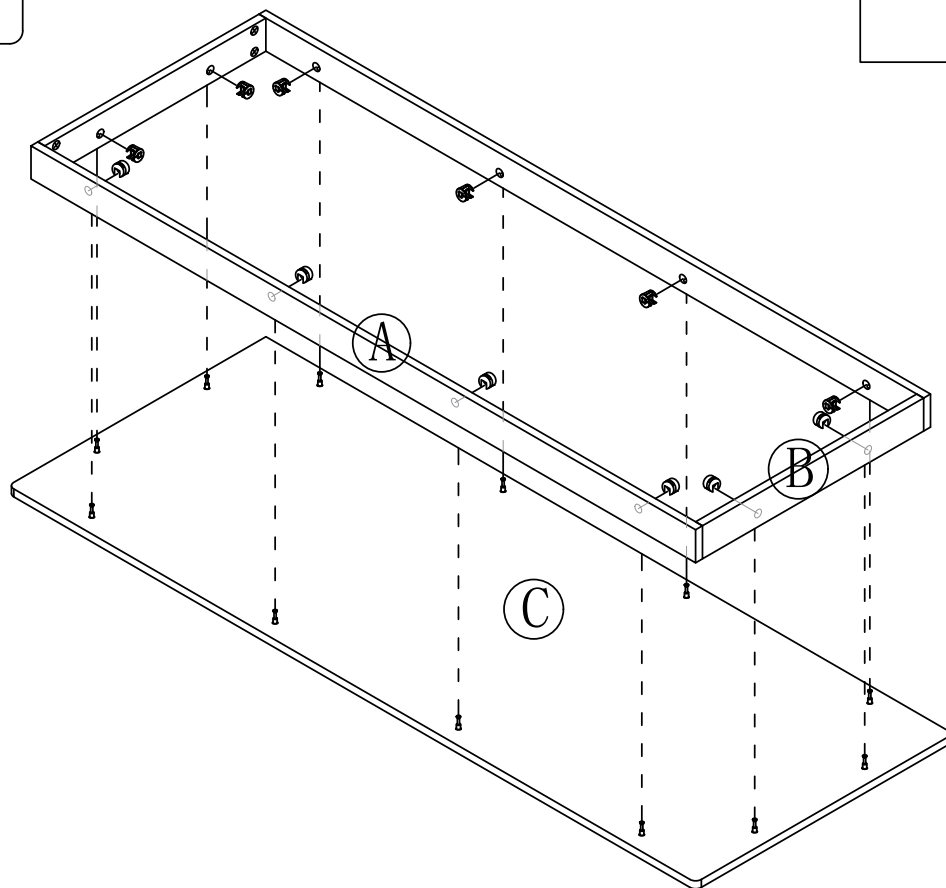


Step 5

⑦





x10

Tear off release paper and stick the black foot pad on the board


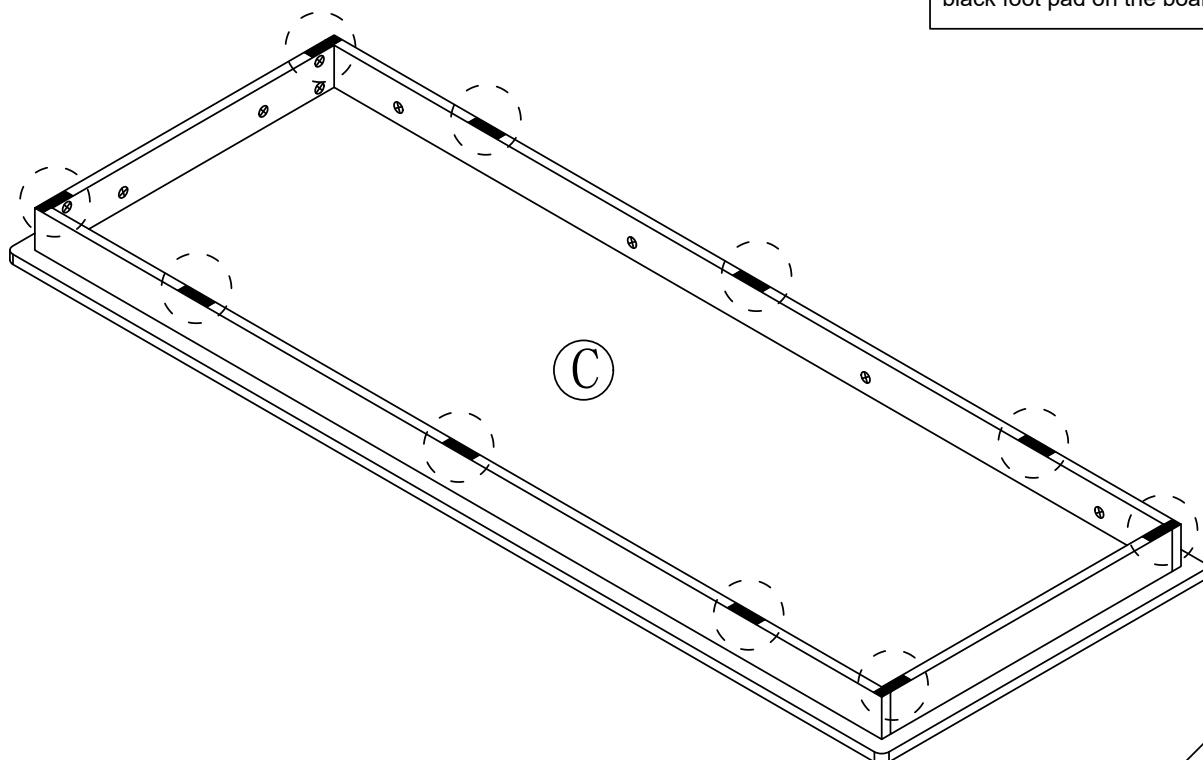


7

Step6

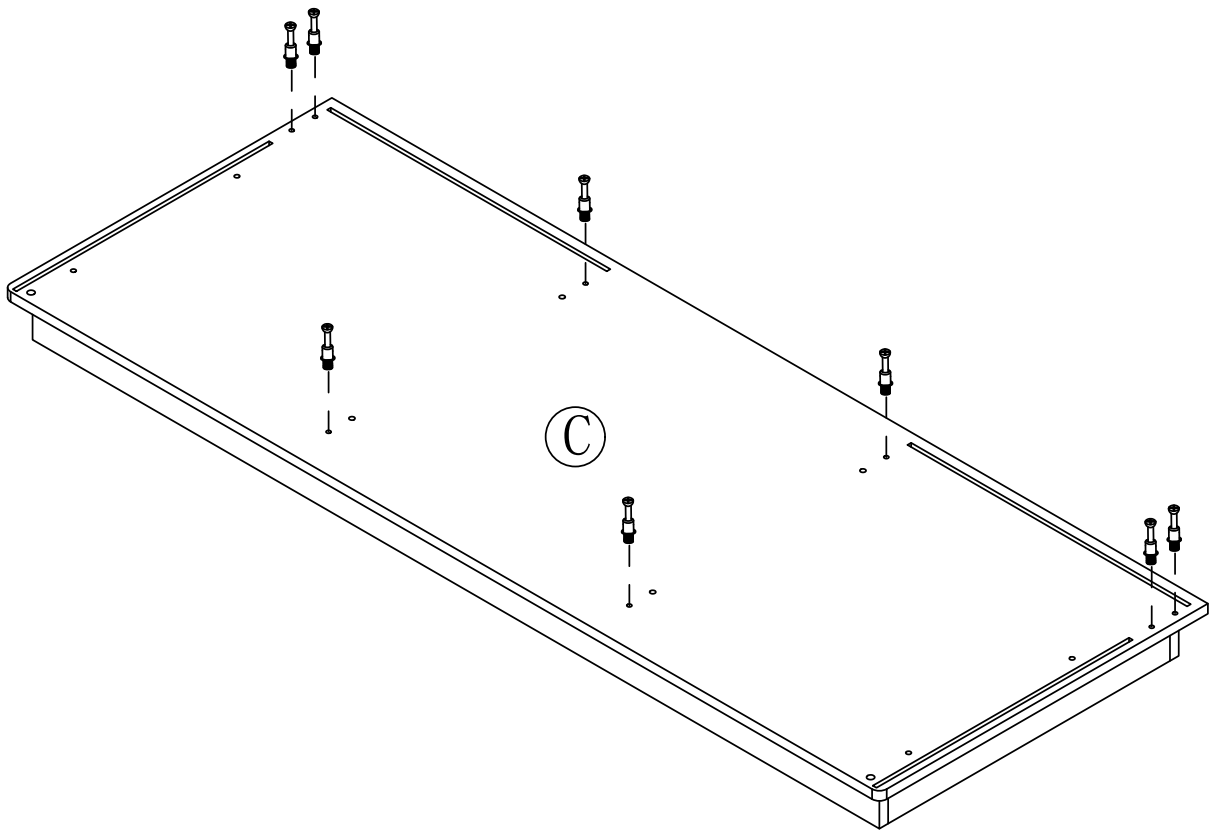

Step 7

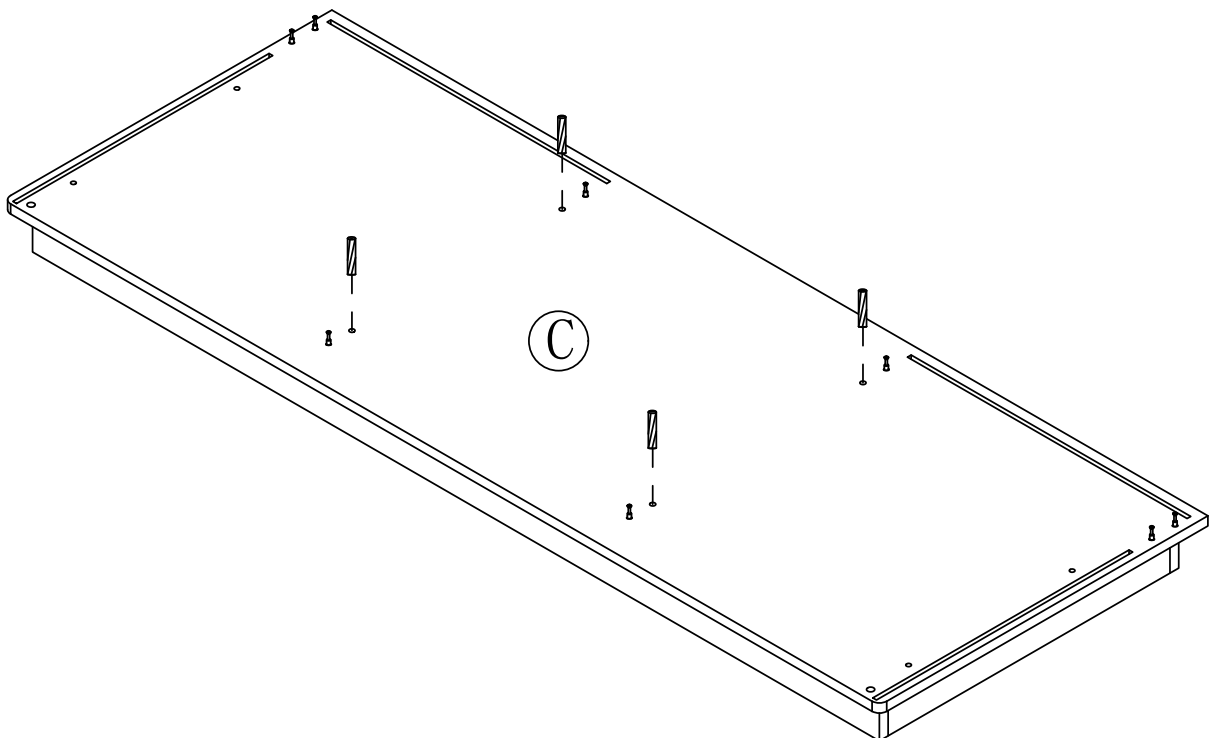

Step8

5




x4

13






x4


NOTE: Do not fully tighten all screws until the cabinet is completely assembled. Ensure there is enough clearance left between the screws, corner brackets, shelves, and glass for proper adjustment.




Prohibited: Electric screwdriver use.

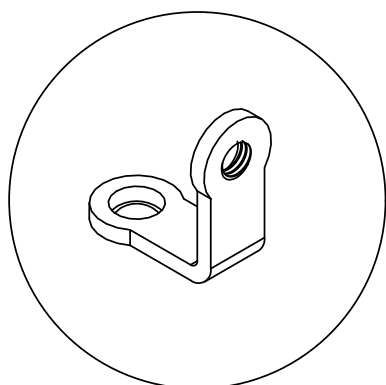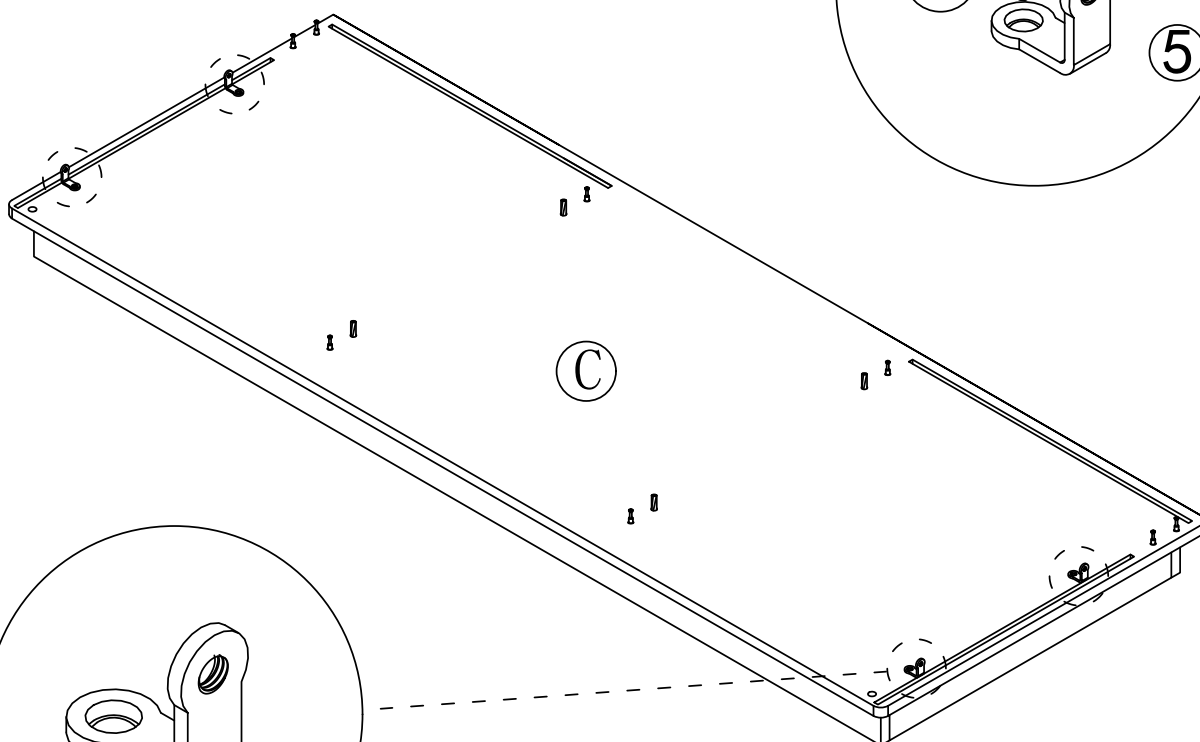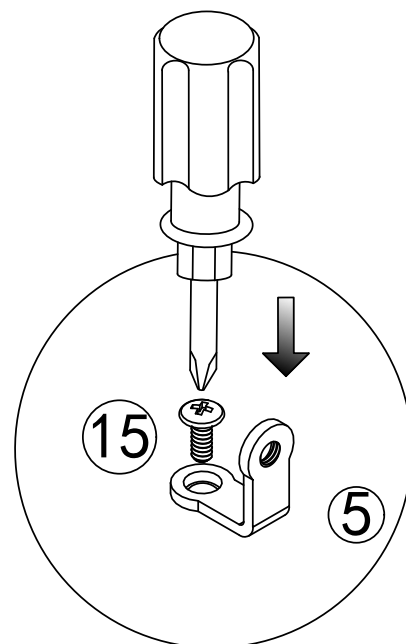



Install this hole



Unscrew the screws first.





Step 9

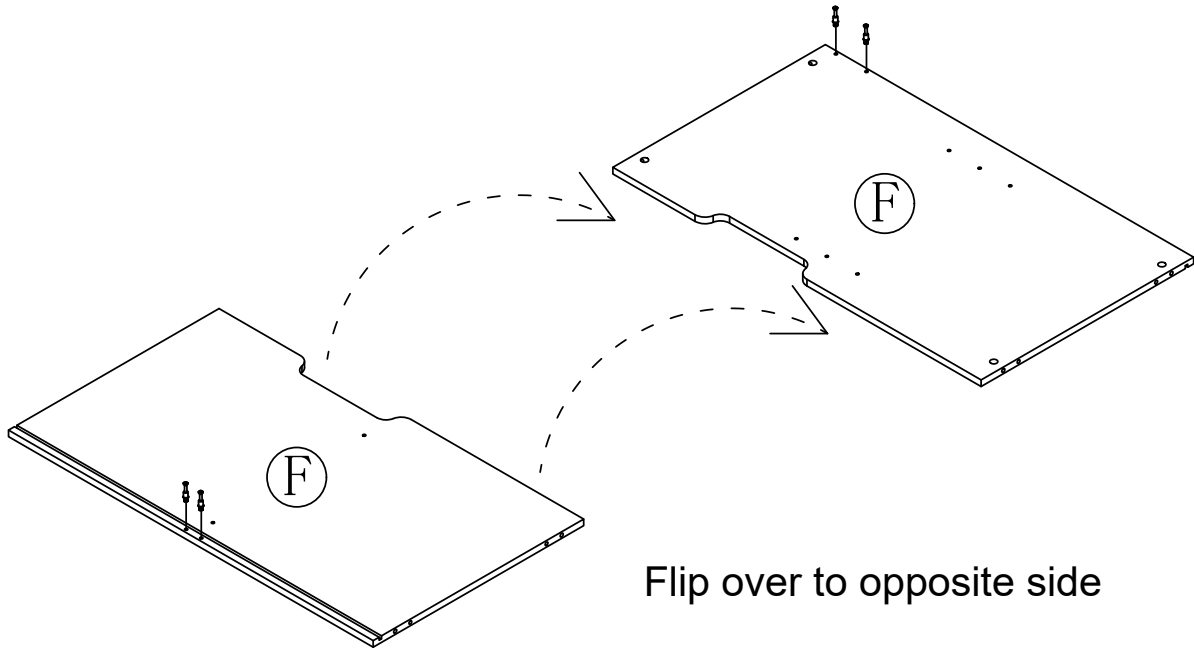

Flip over to opposite side

Step 10

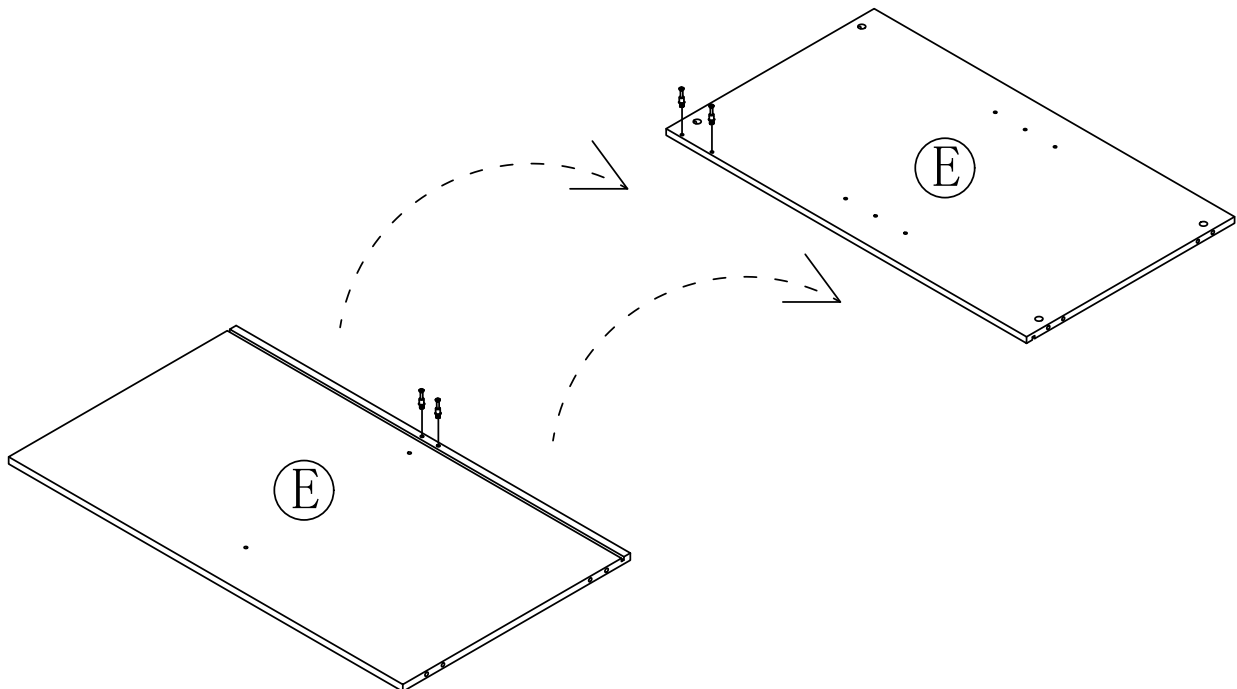


Step 11

②



x2

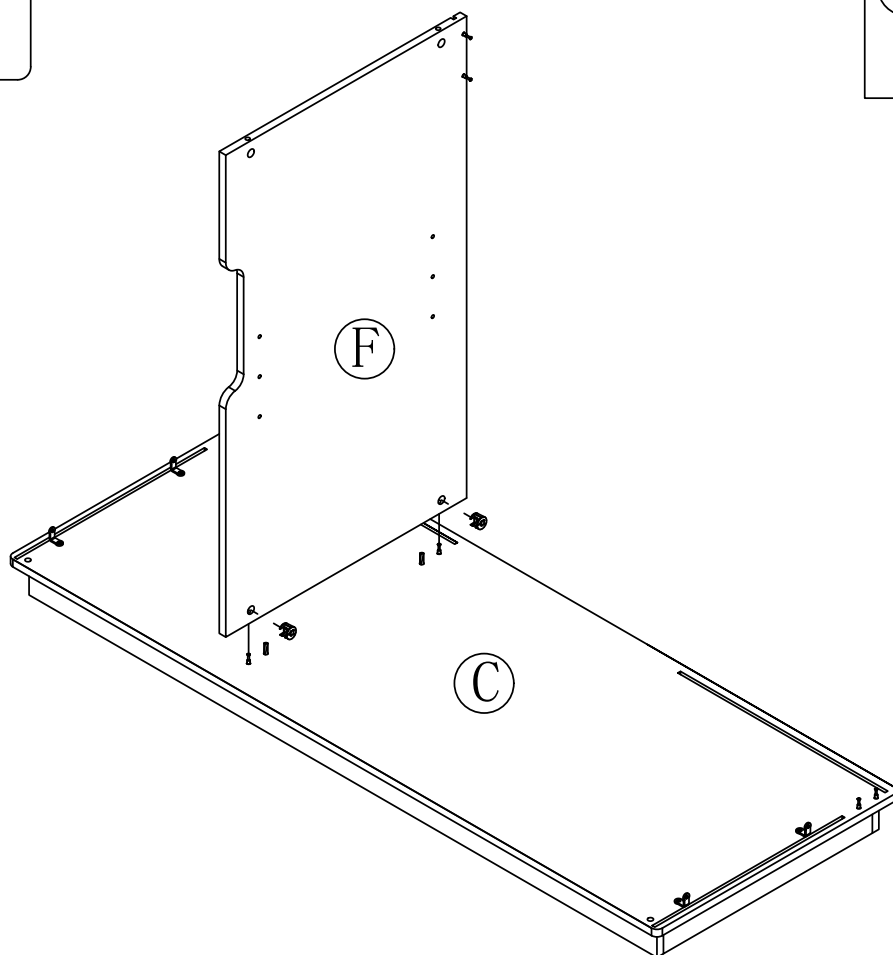


Step 12

②




x2

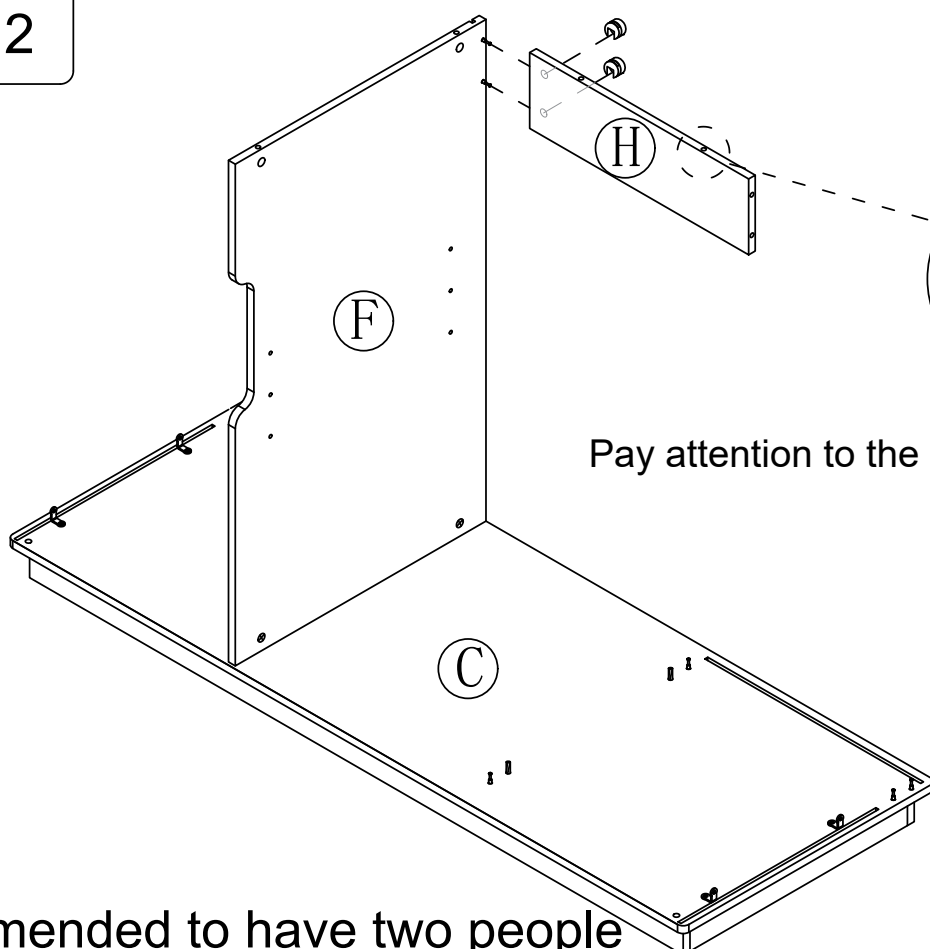

Pay attention to the position of the hole

It is recommended to have two people assist with the installation.

Step 13

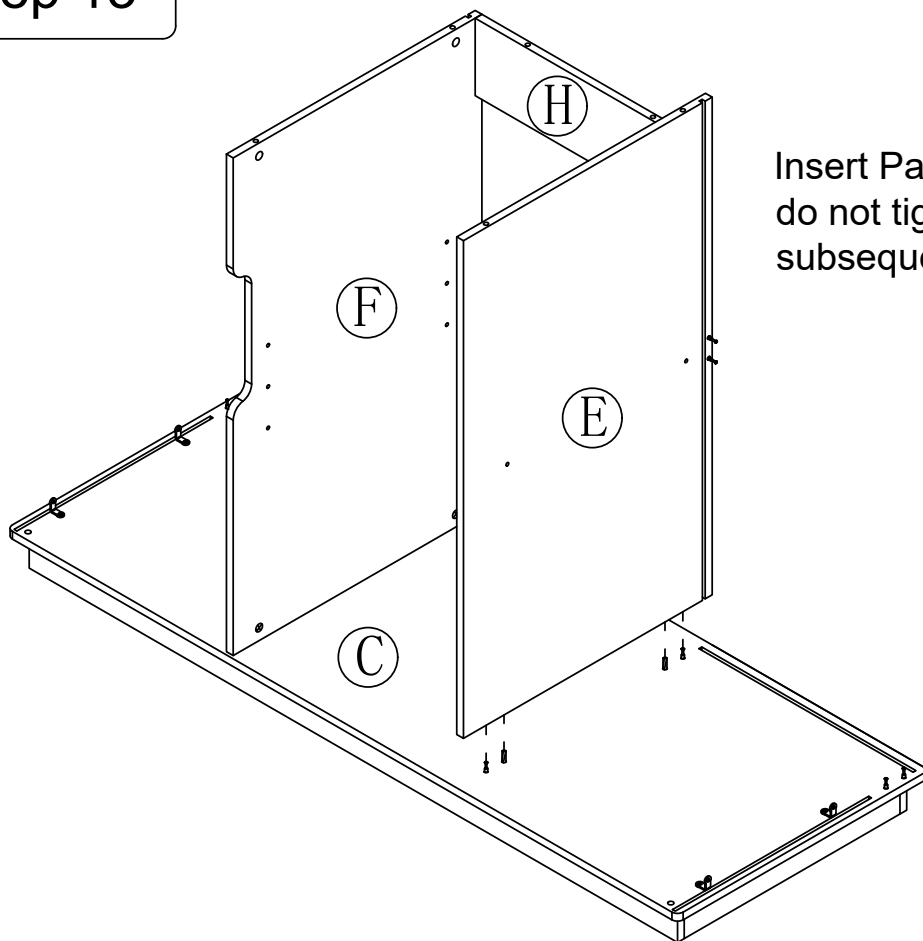

Insert Panel E into Panel C, but do not tighten it to facilitate subsequent installation.


Step 14

1. Bend the E plate a little outward to facilitate the installation of the H plate

2



x2

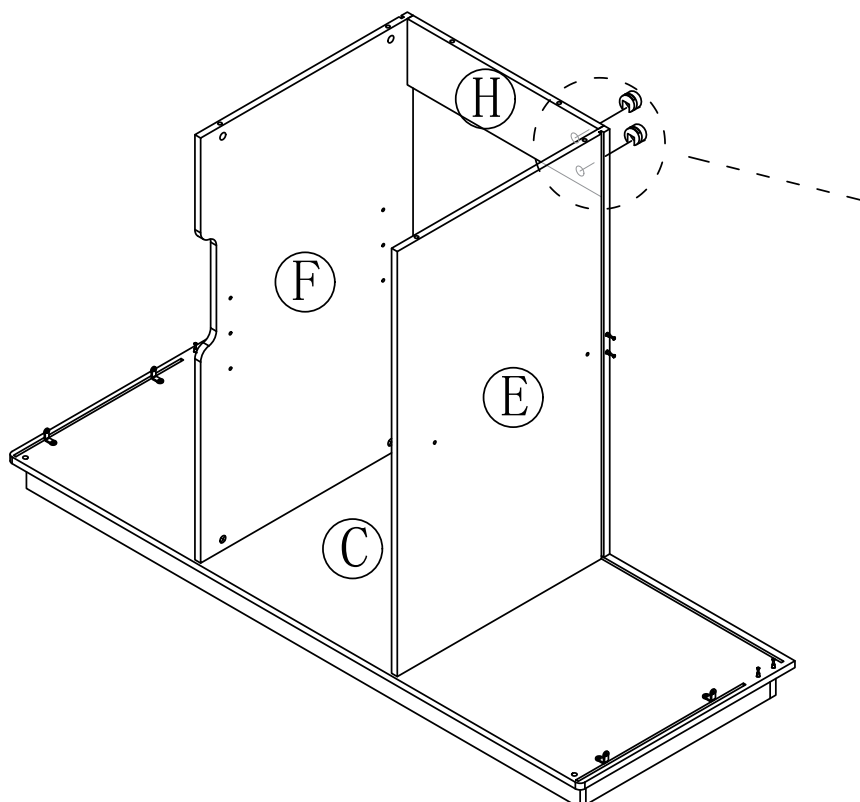


Step 15

②



x2

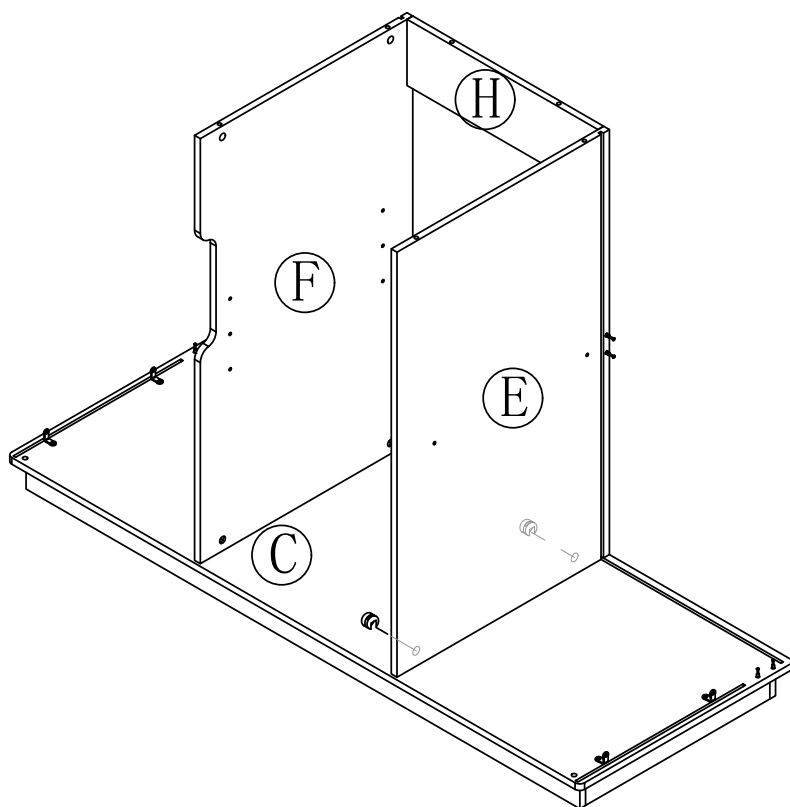


Step 16

②





x4

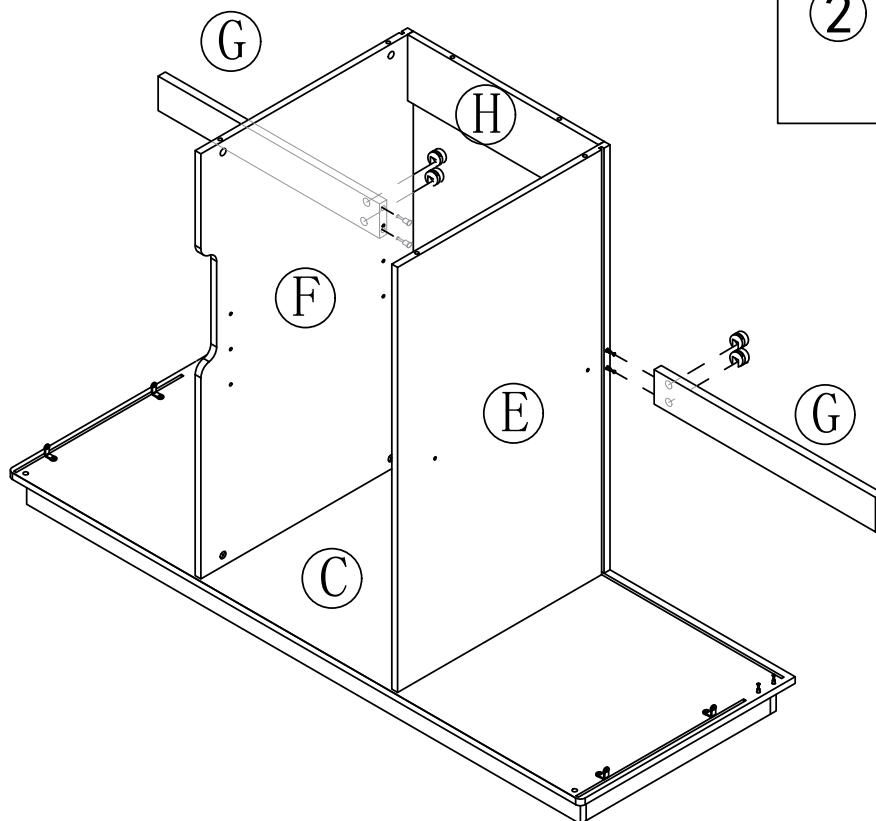


It is recommended that two people work together when installing panel G. One person shall hold panel G steadily during installation.

Step 17

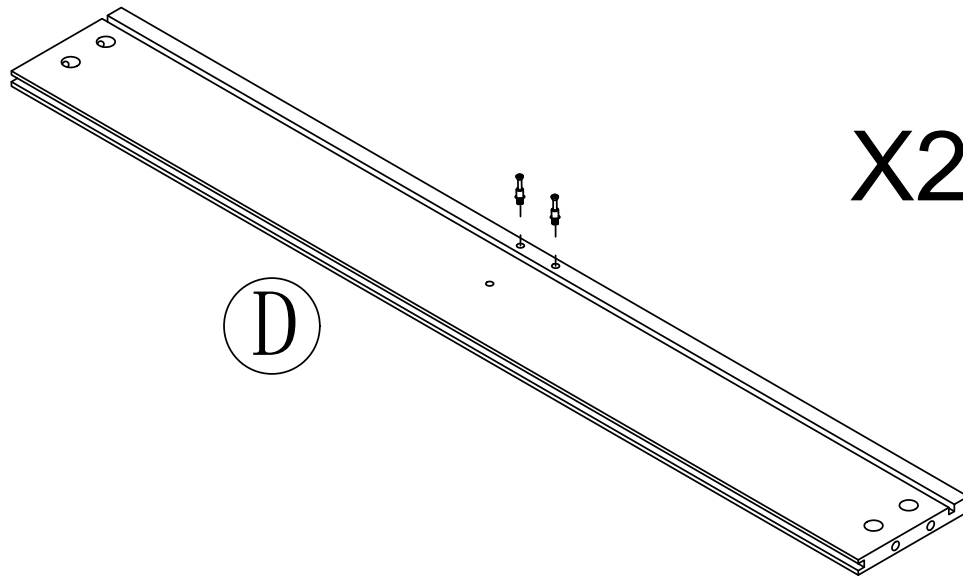

Step 18

Insert Panel D into Panel C, but do not tighten it to facilitate subsequent installation.

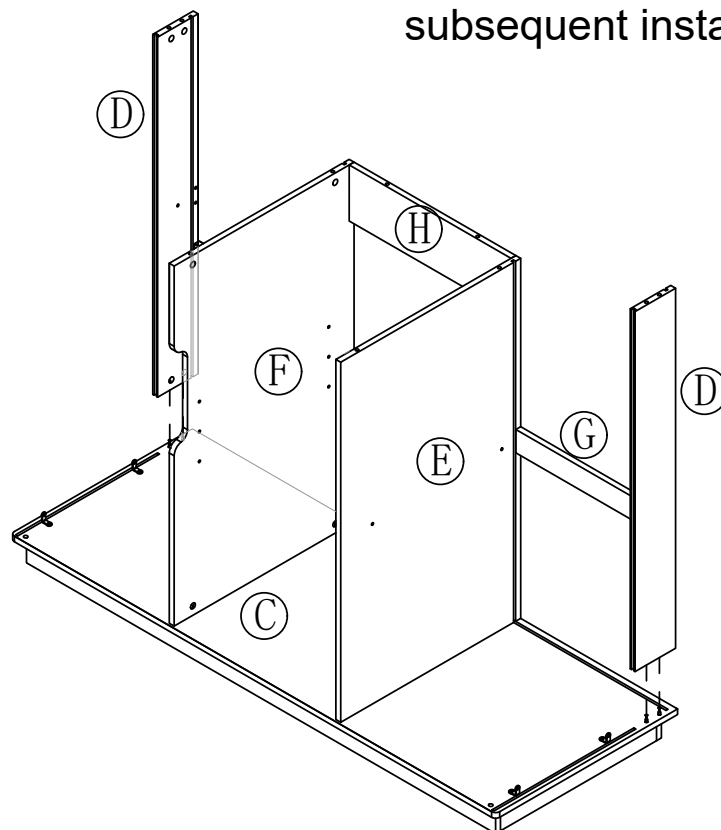


Step 19

2



x4

Bend the D plate a little outward to facilitate the installation of the G plate

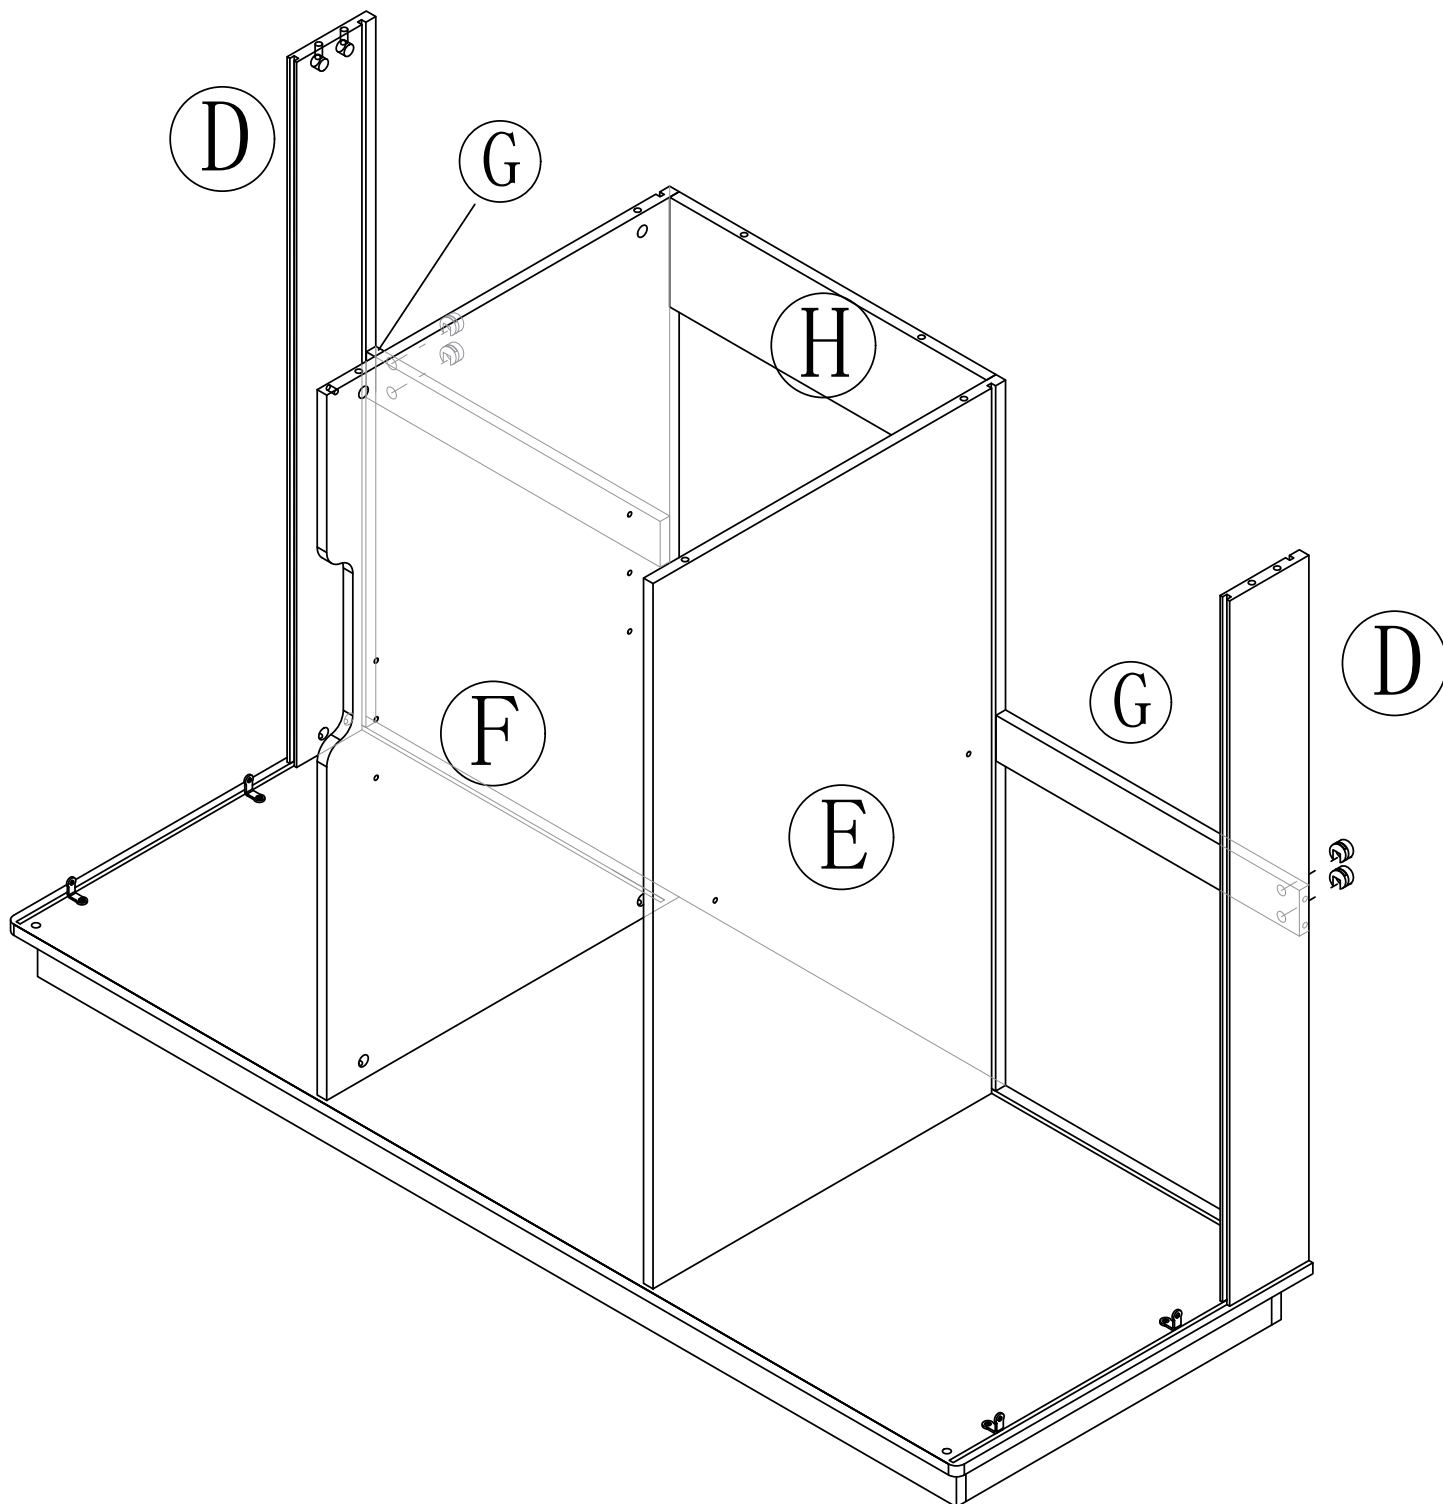


Step 20

2



x4

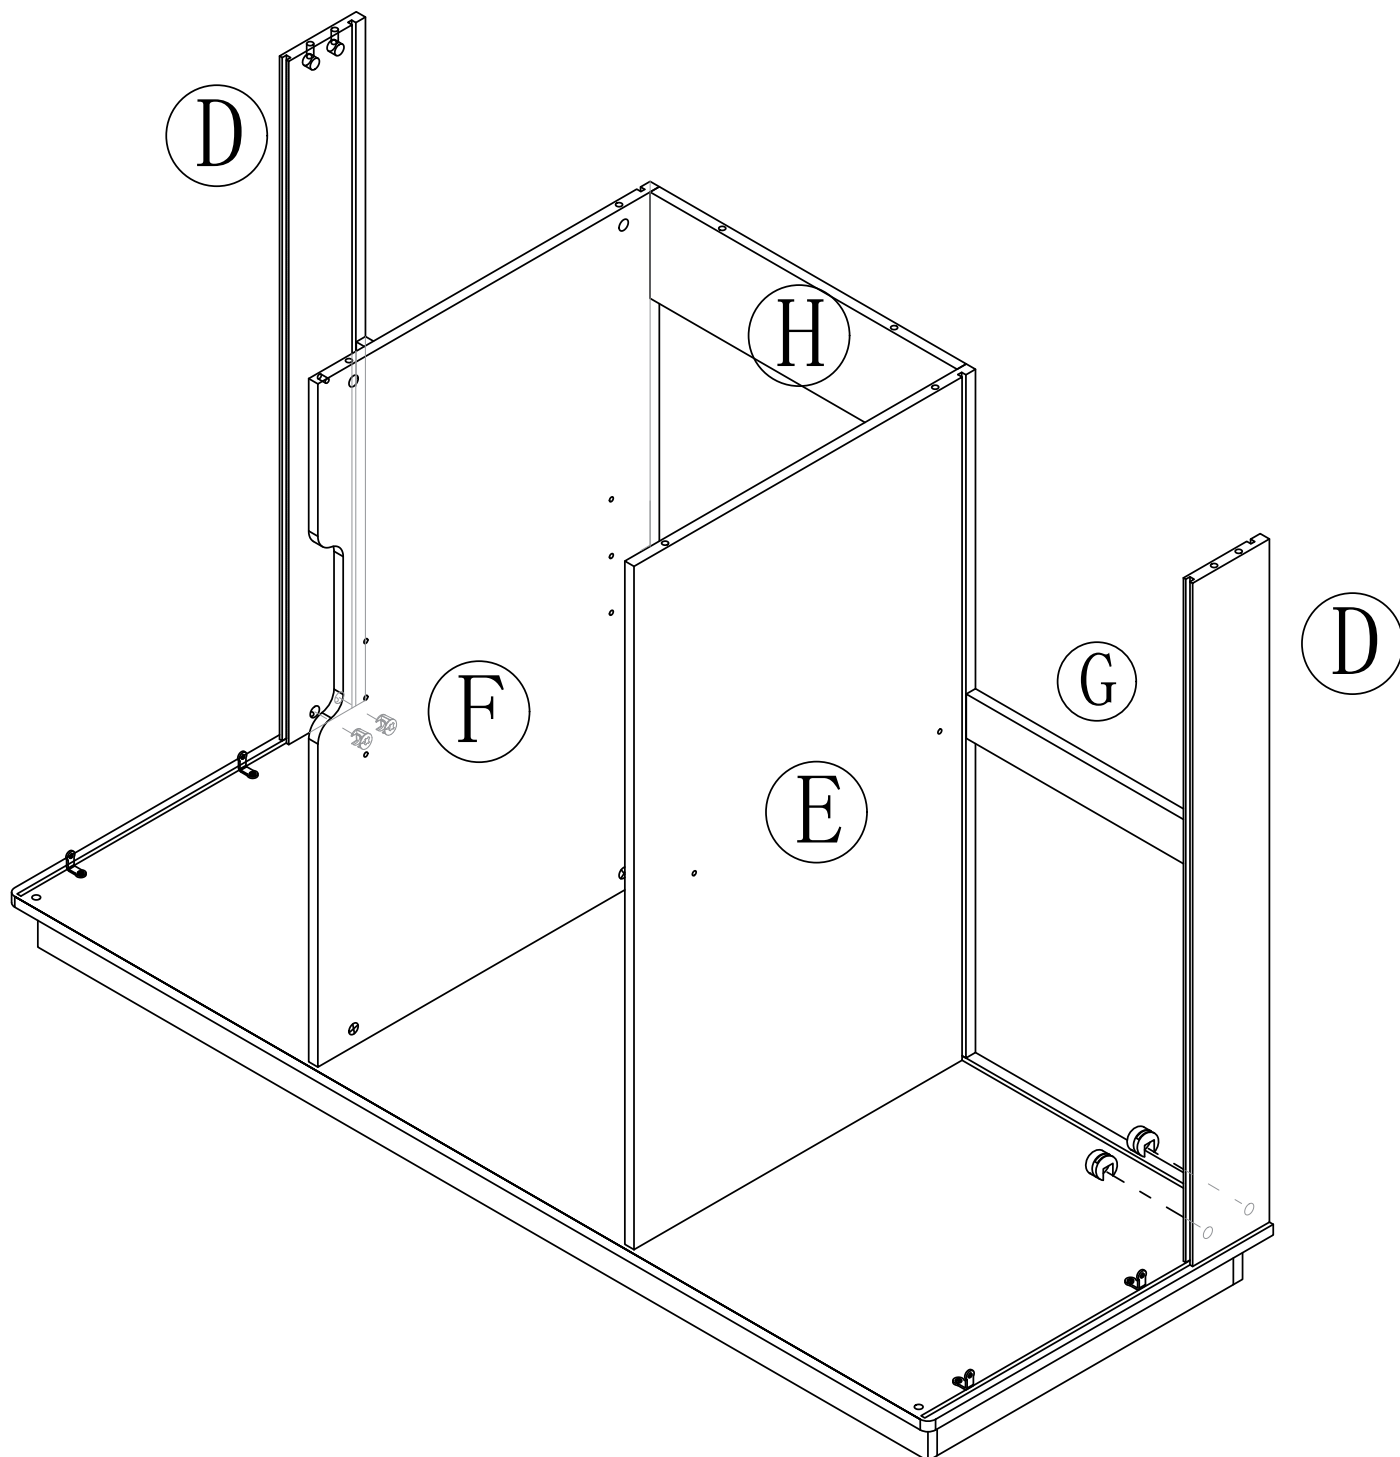

Step 21

⑤




x4



x4


Install with the hole side of glass facing front, do not reverse installation.

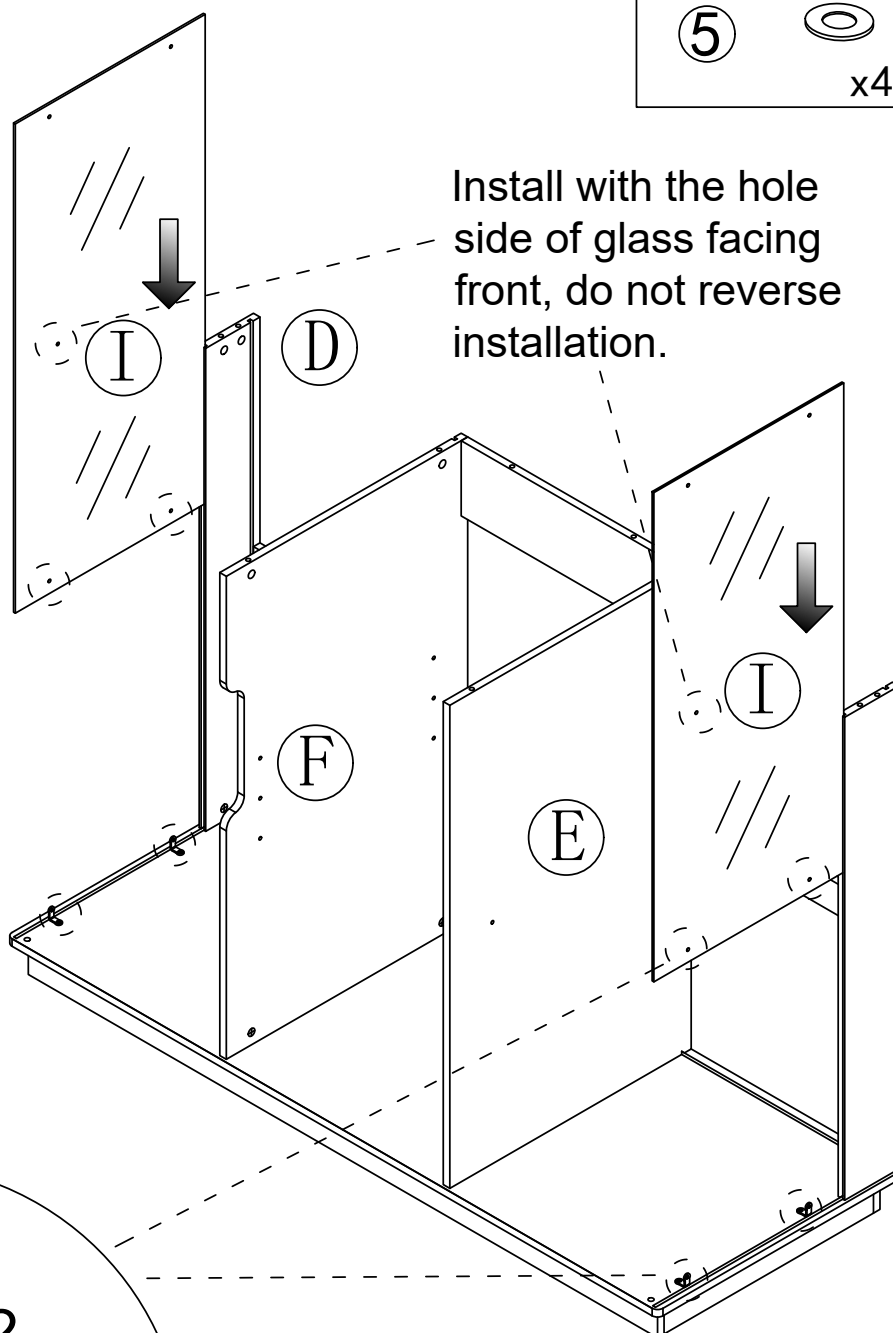

Step 2


Tighten all screws.

Step 1


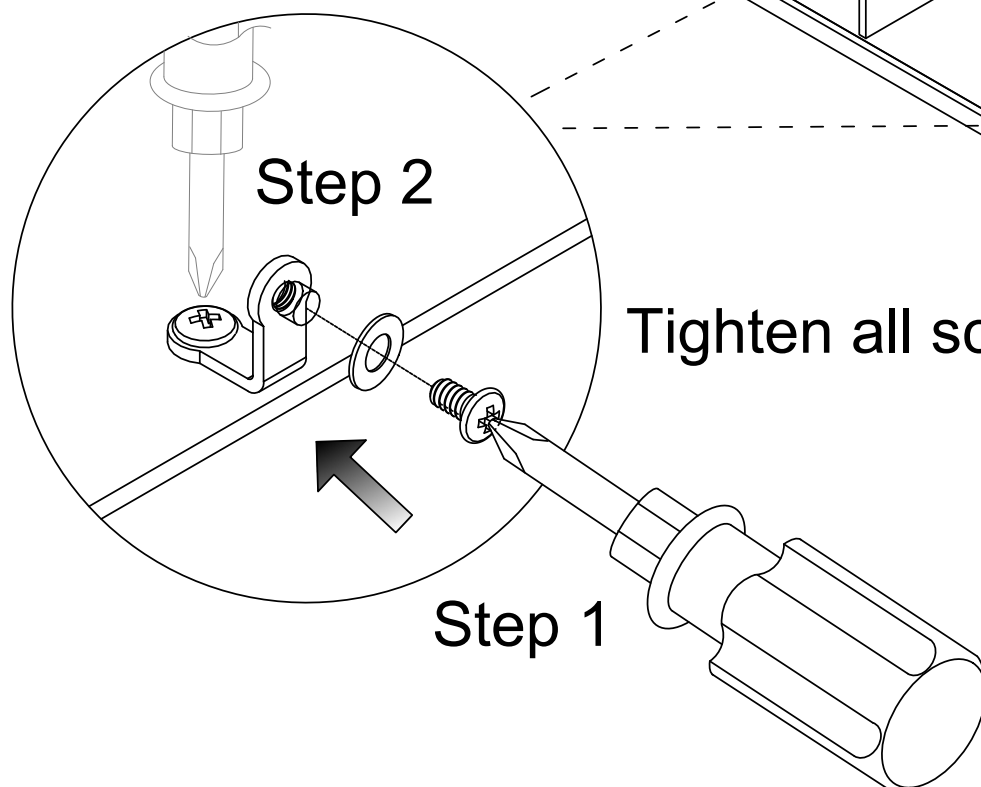


It is recommended to have two people assist with the installation.



Step 22

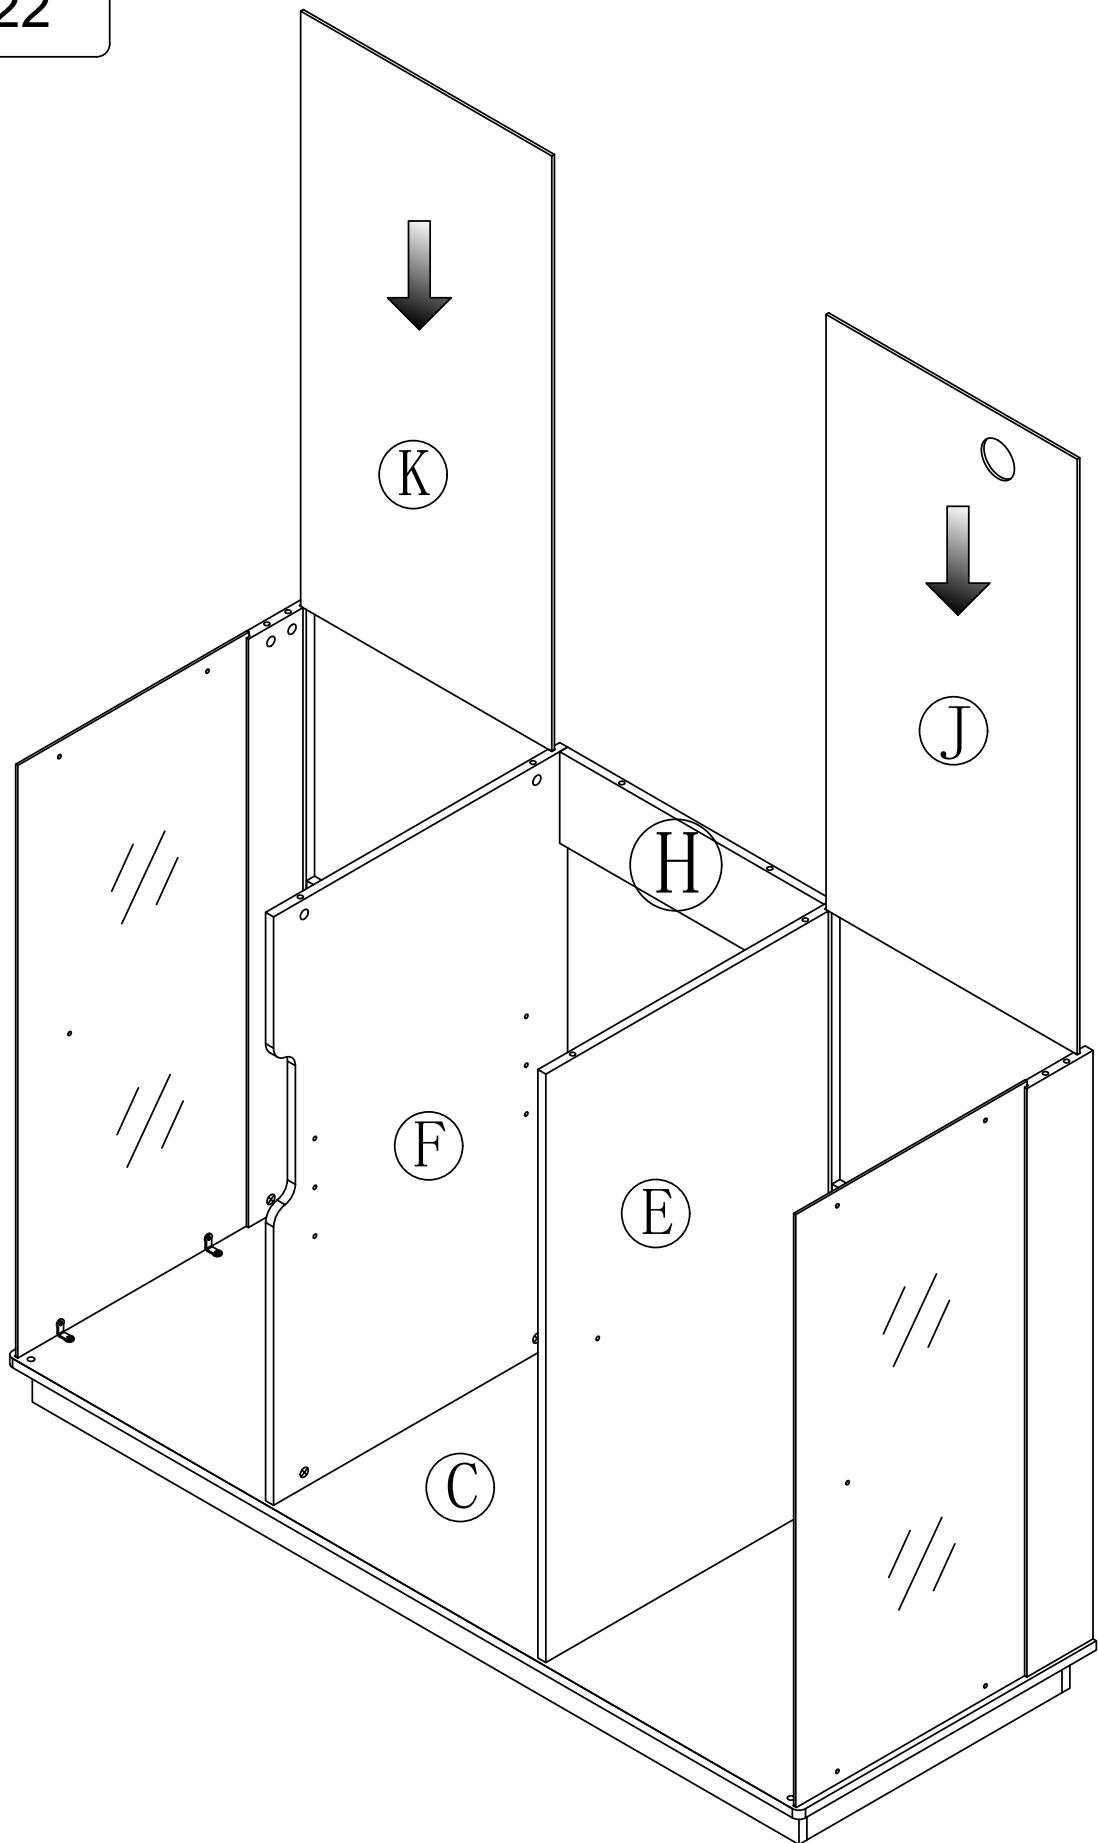

Step 23

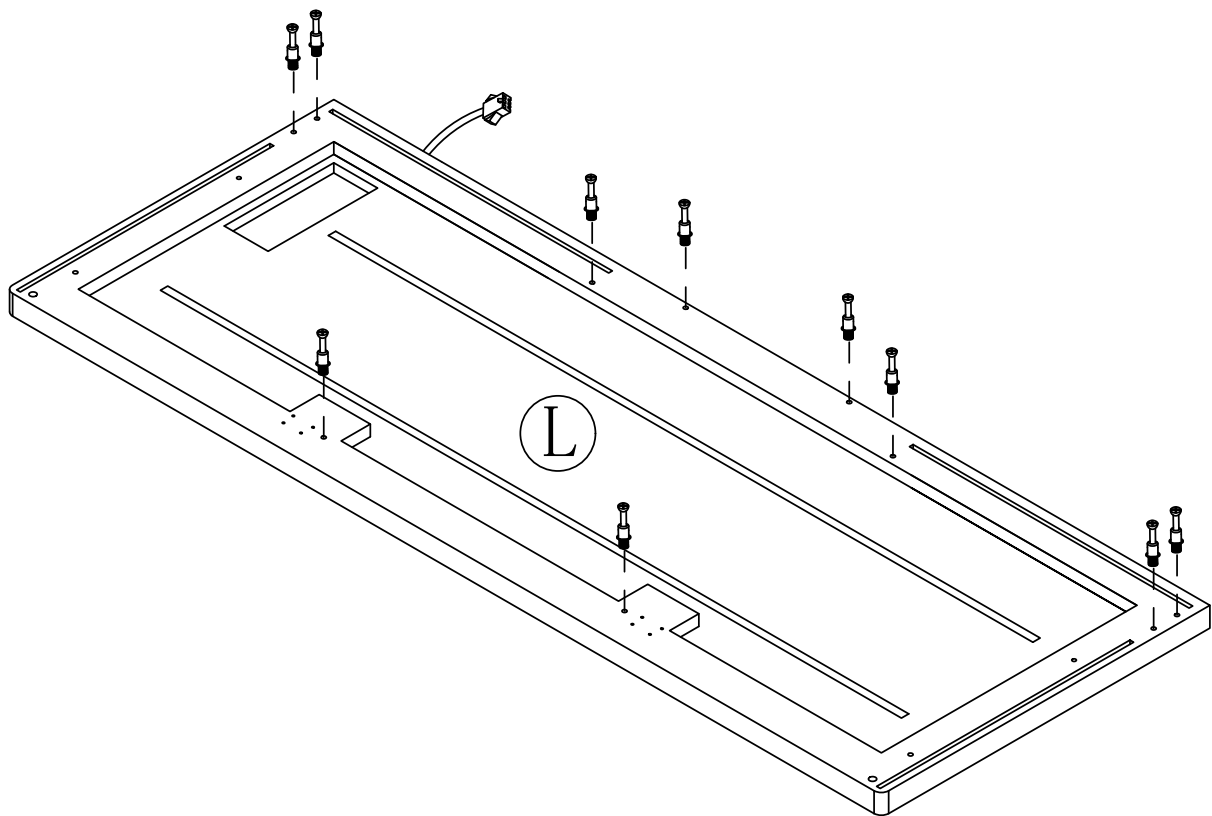

Step 24

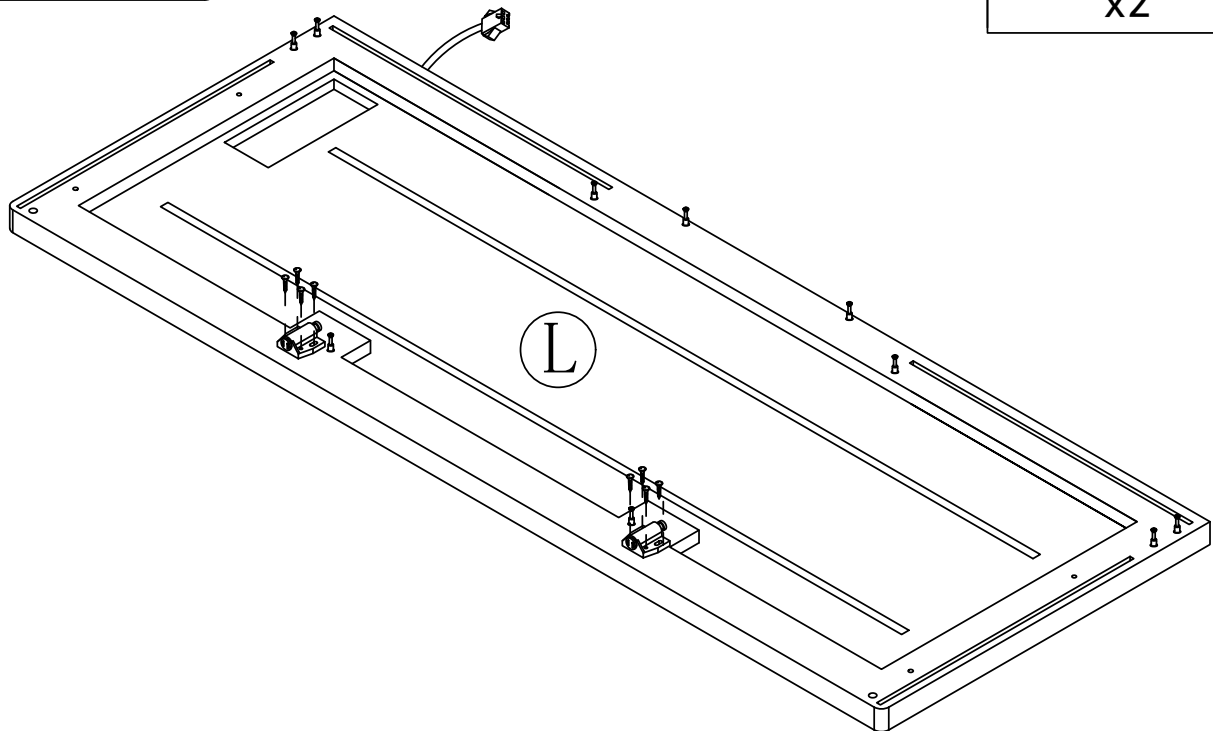

Step 25

5




x4

13






x4




NOTE: Do not fully tighten all screws until the cabinet is completely assembled. Ensure there is enough clearance left between the screws, corner brackets, shelves, and glass for proper adjustment.


Prohibited: Electric screwdriver use.

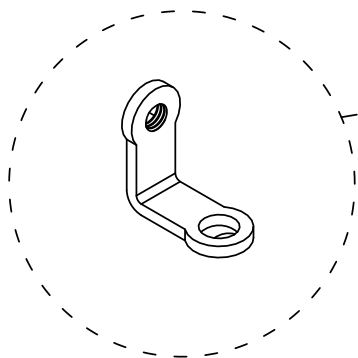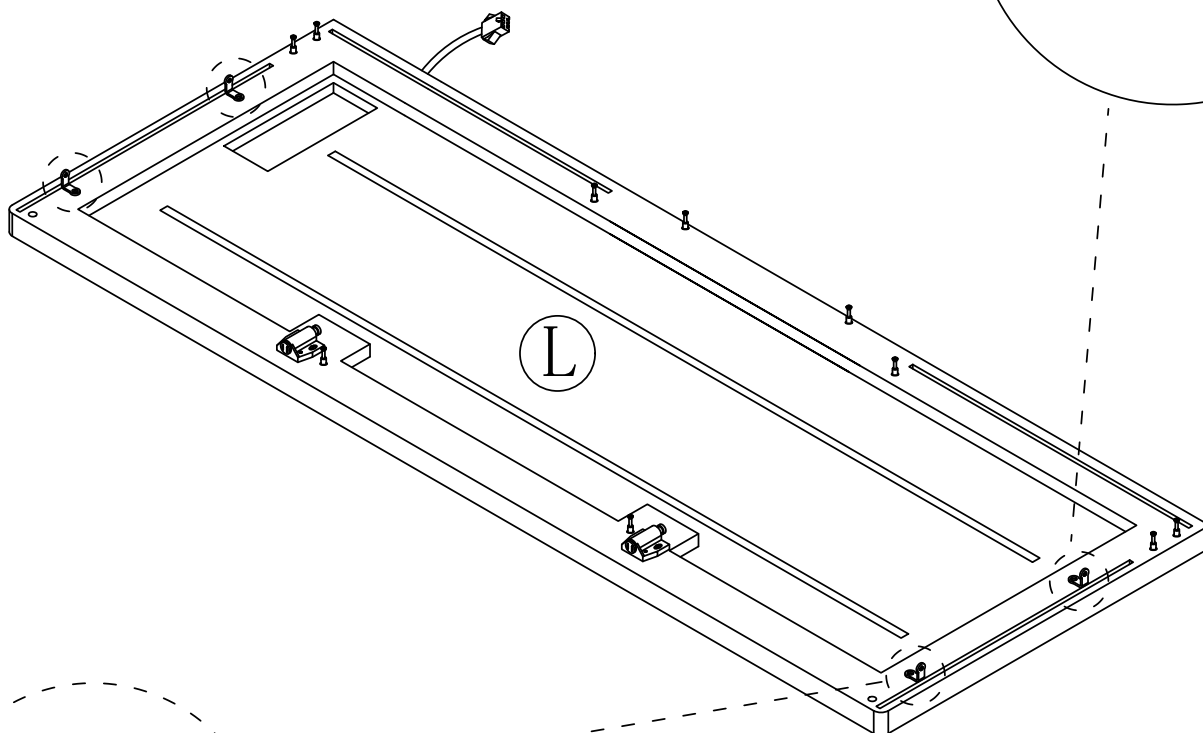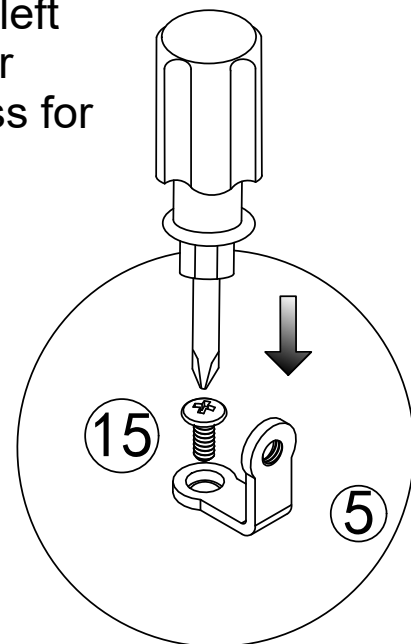

Install this hole



Unscrew the screws first.




Step 26

2



x10

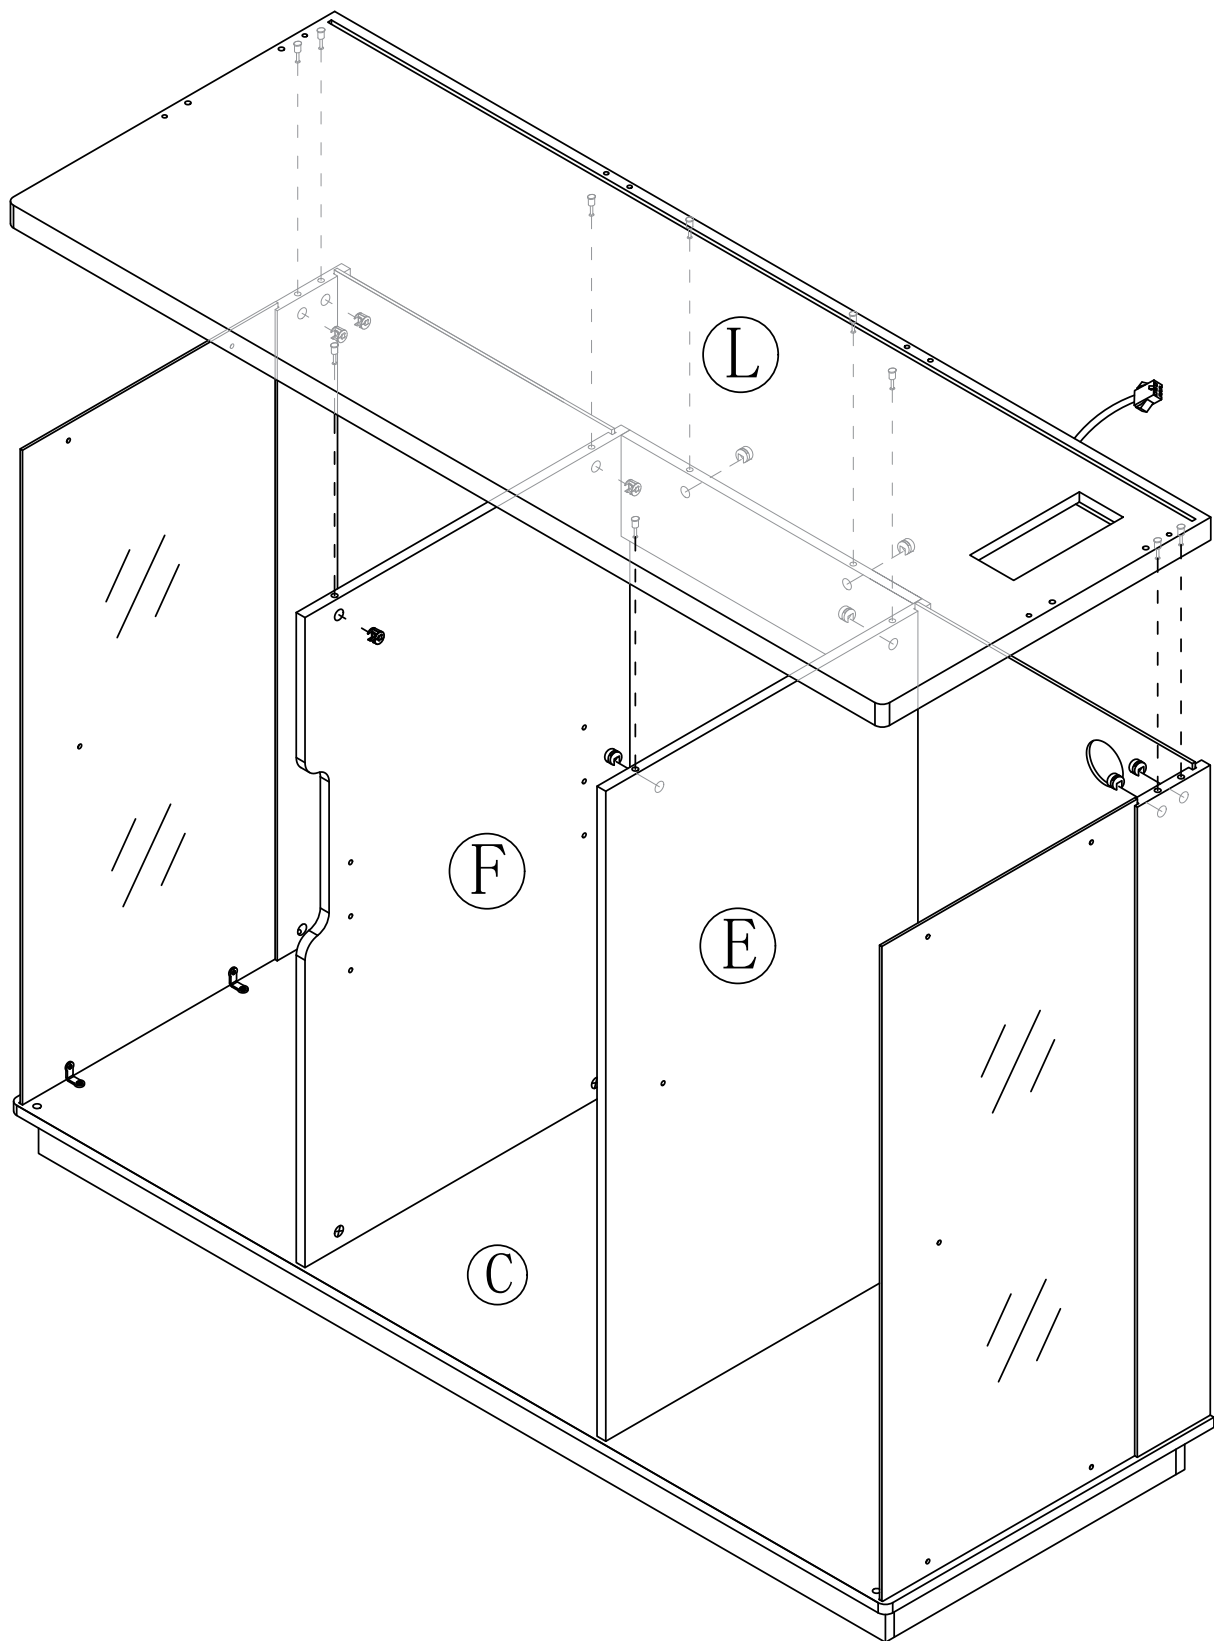

Step 27

5



x4




x4



Tighten all screws.

Step 1



Step 2

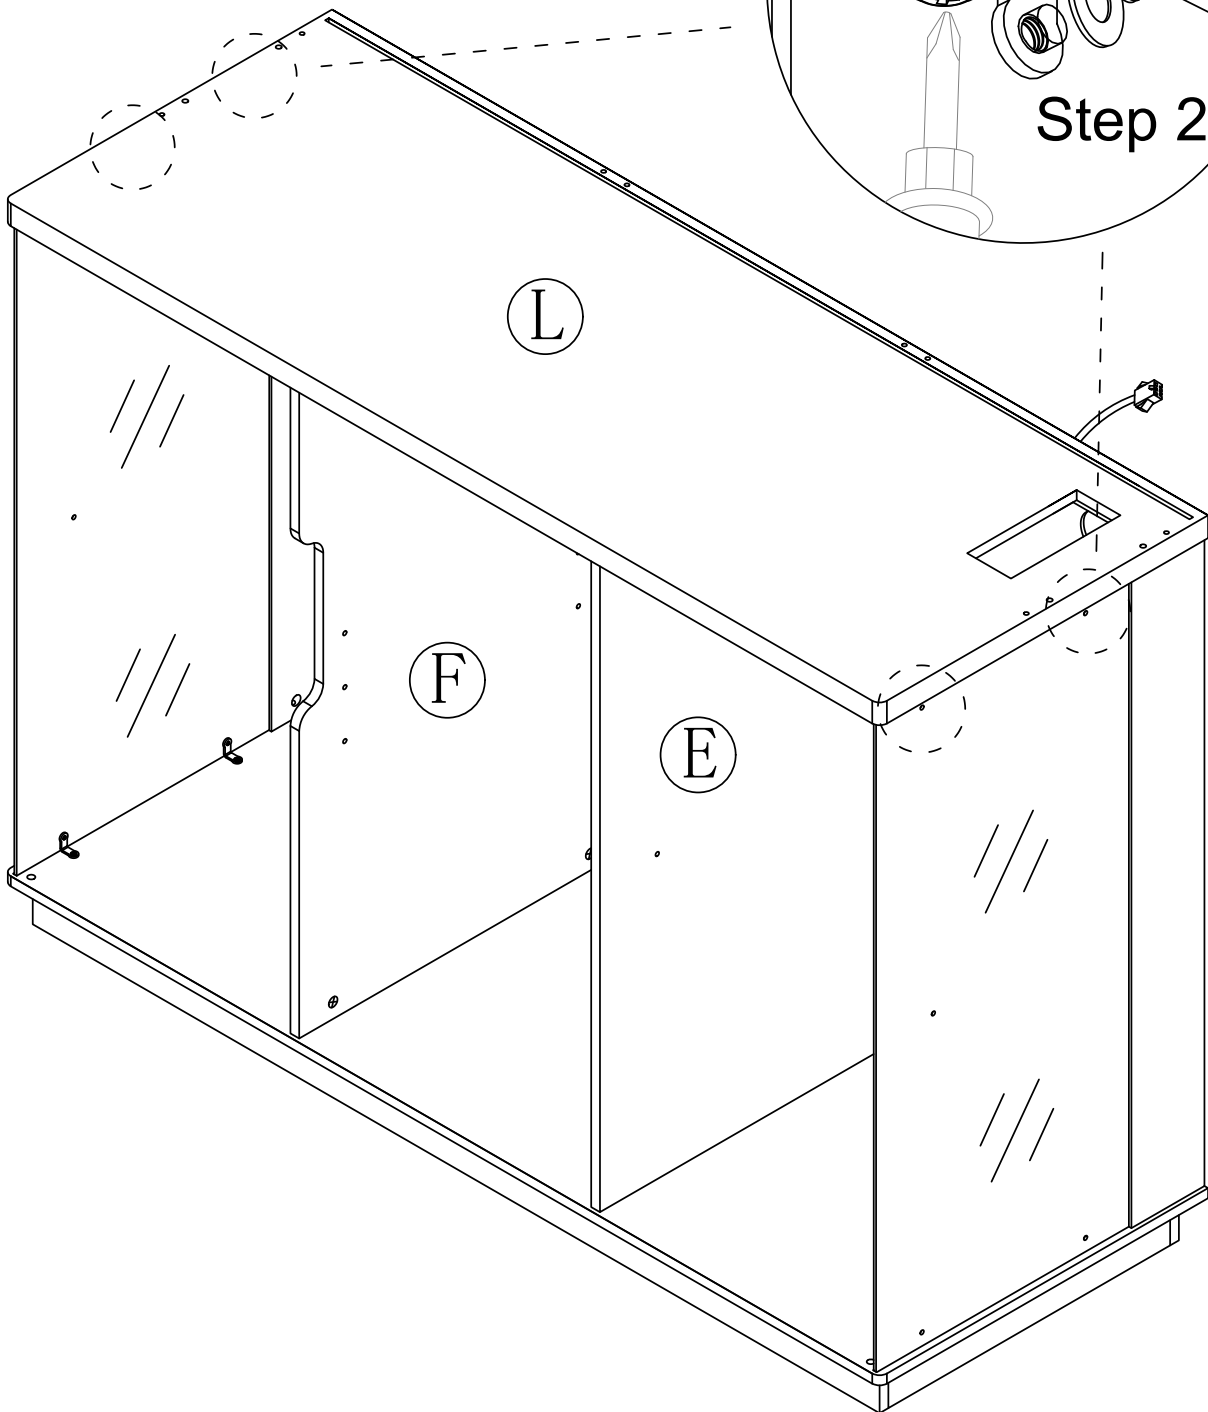

Step 28

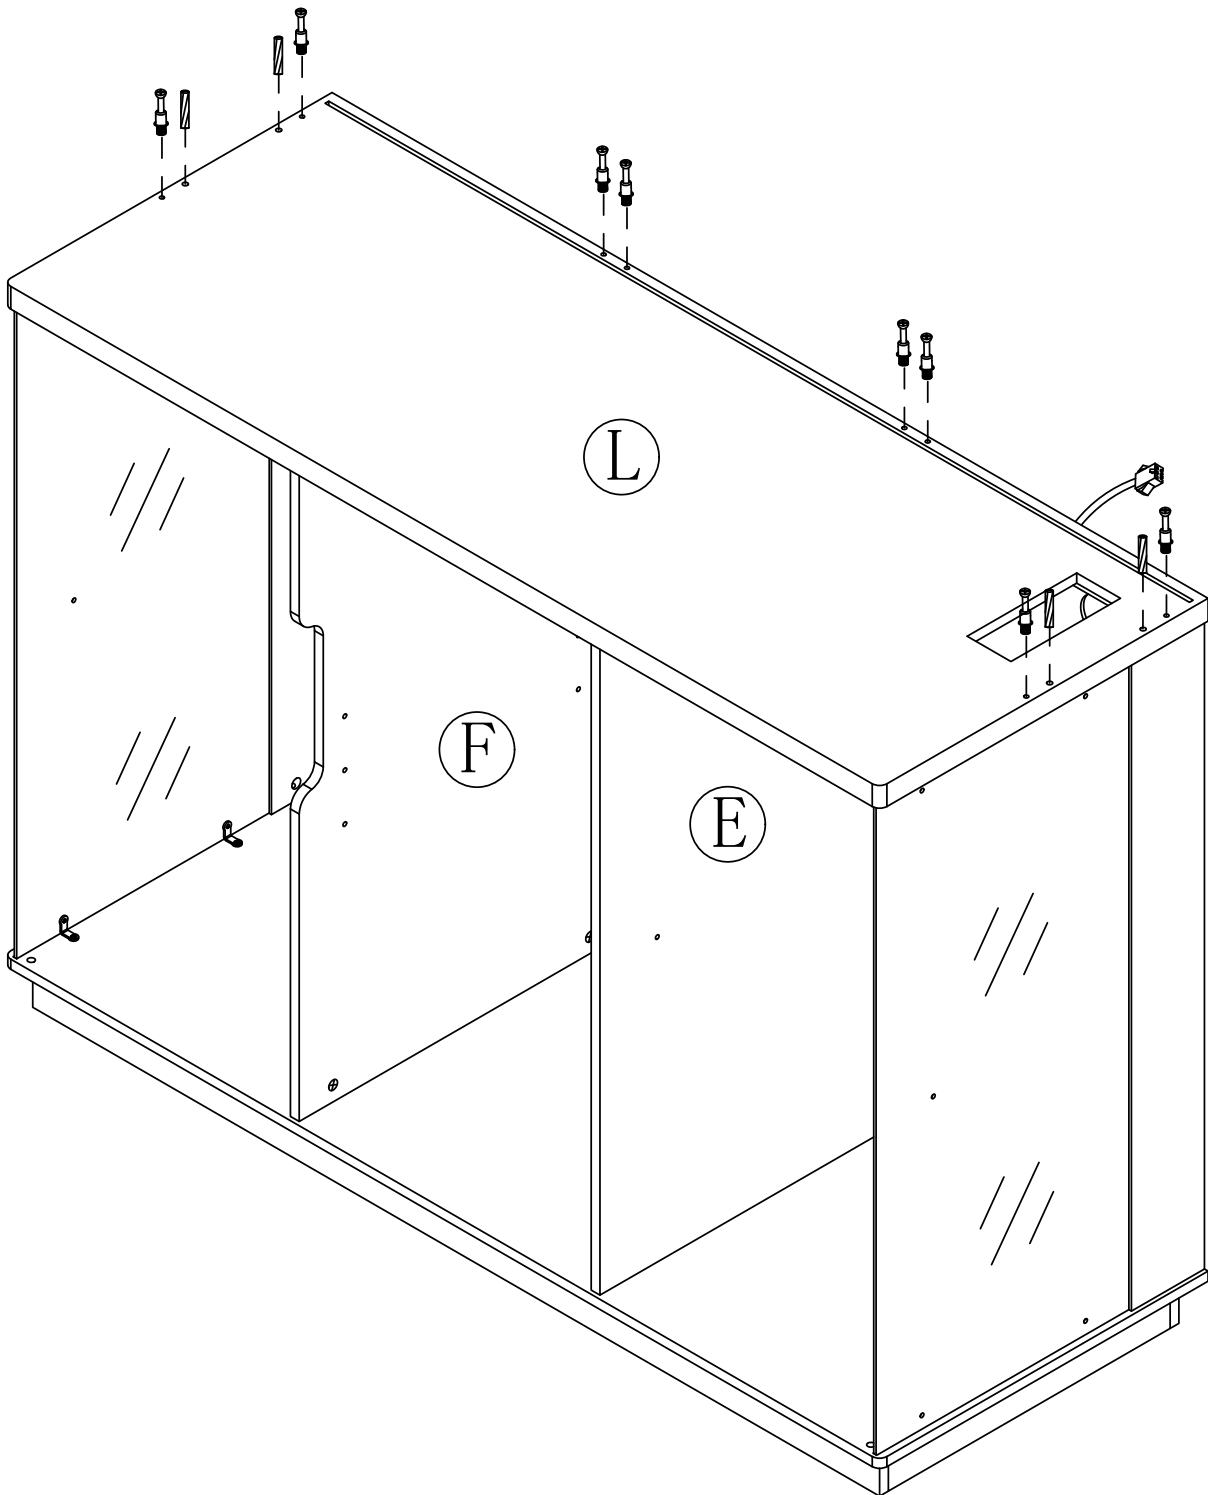

Step 29

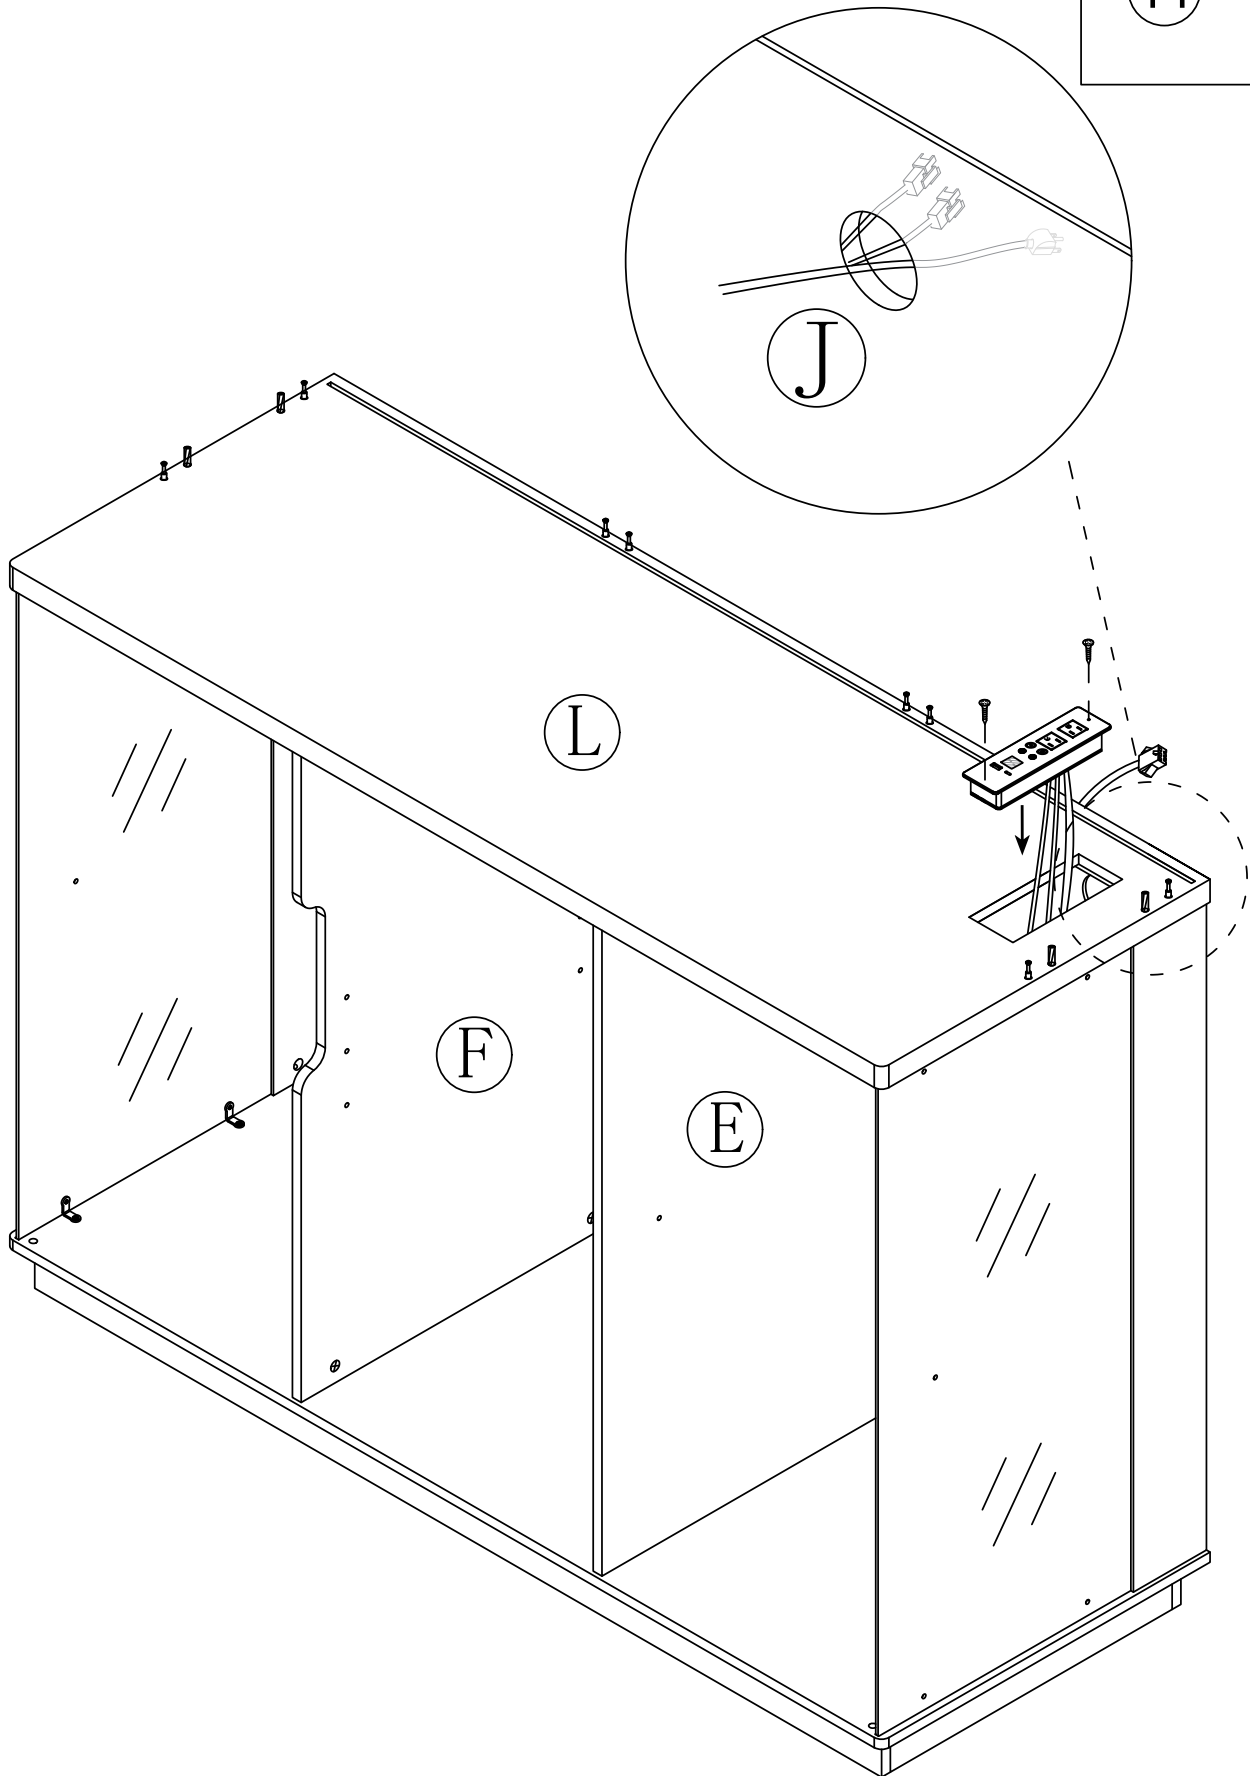


Step 30


2



x8

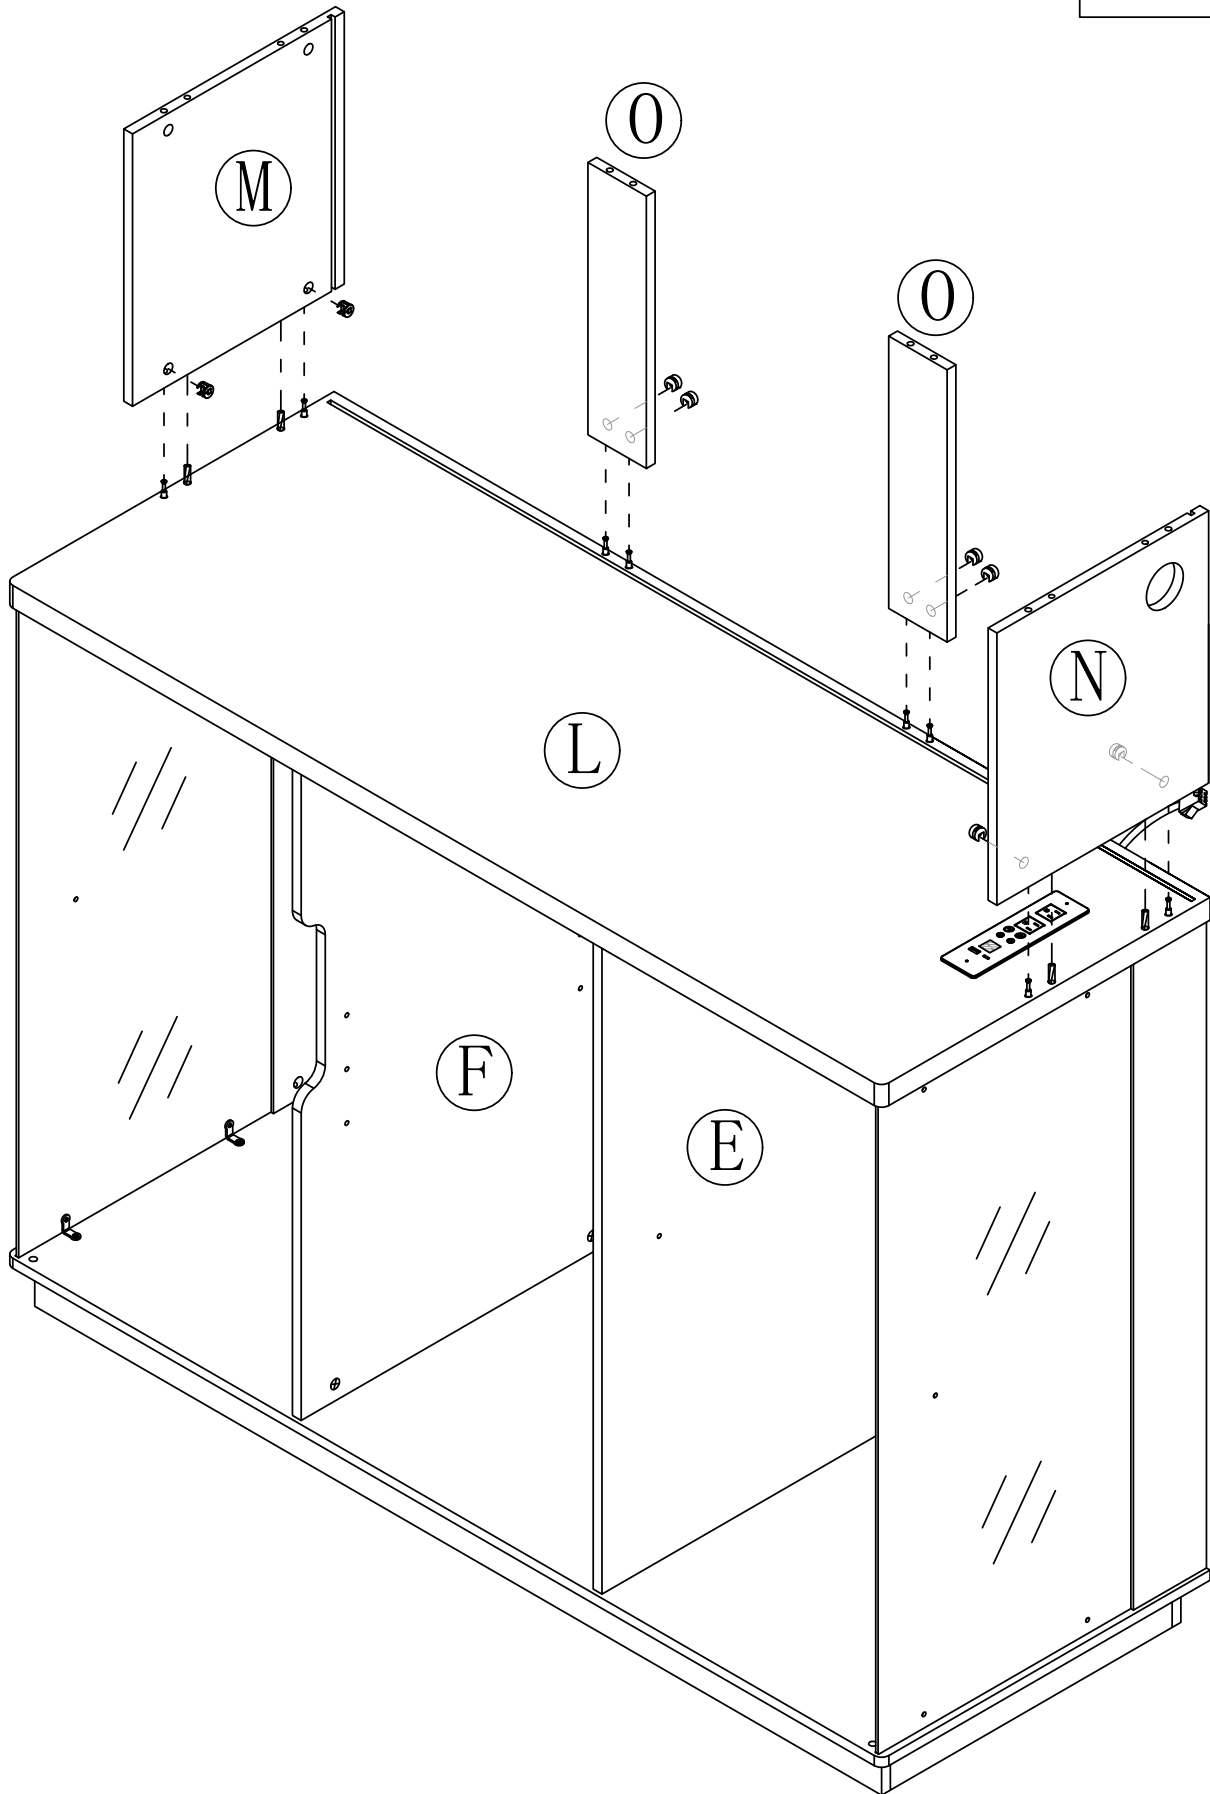

Step 31

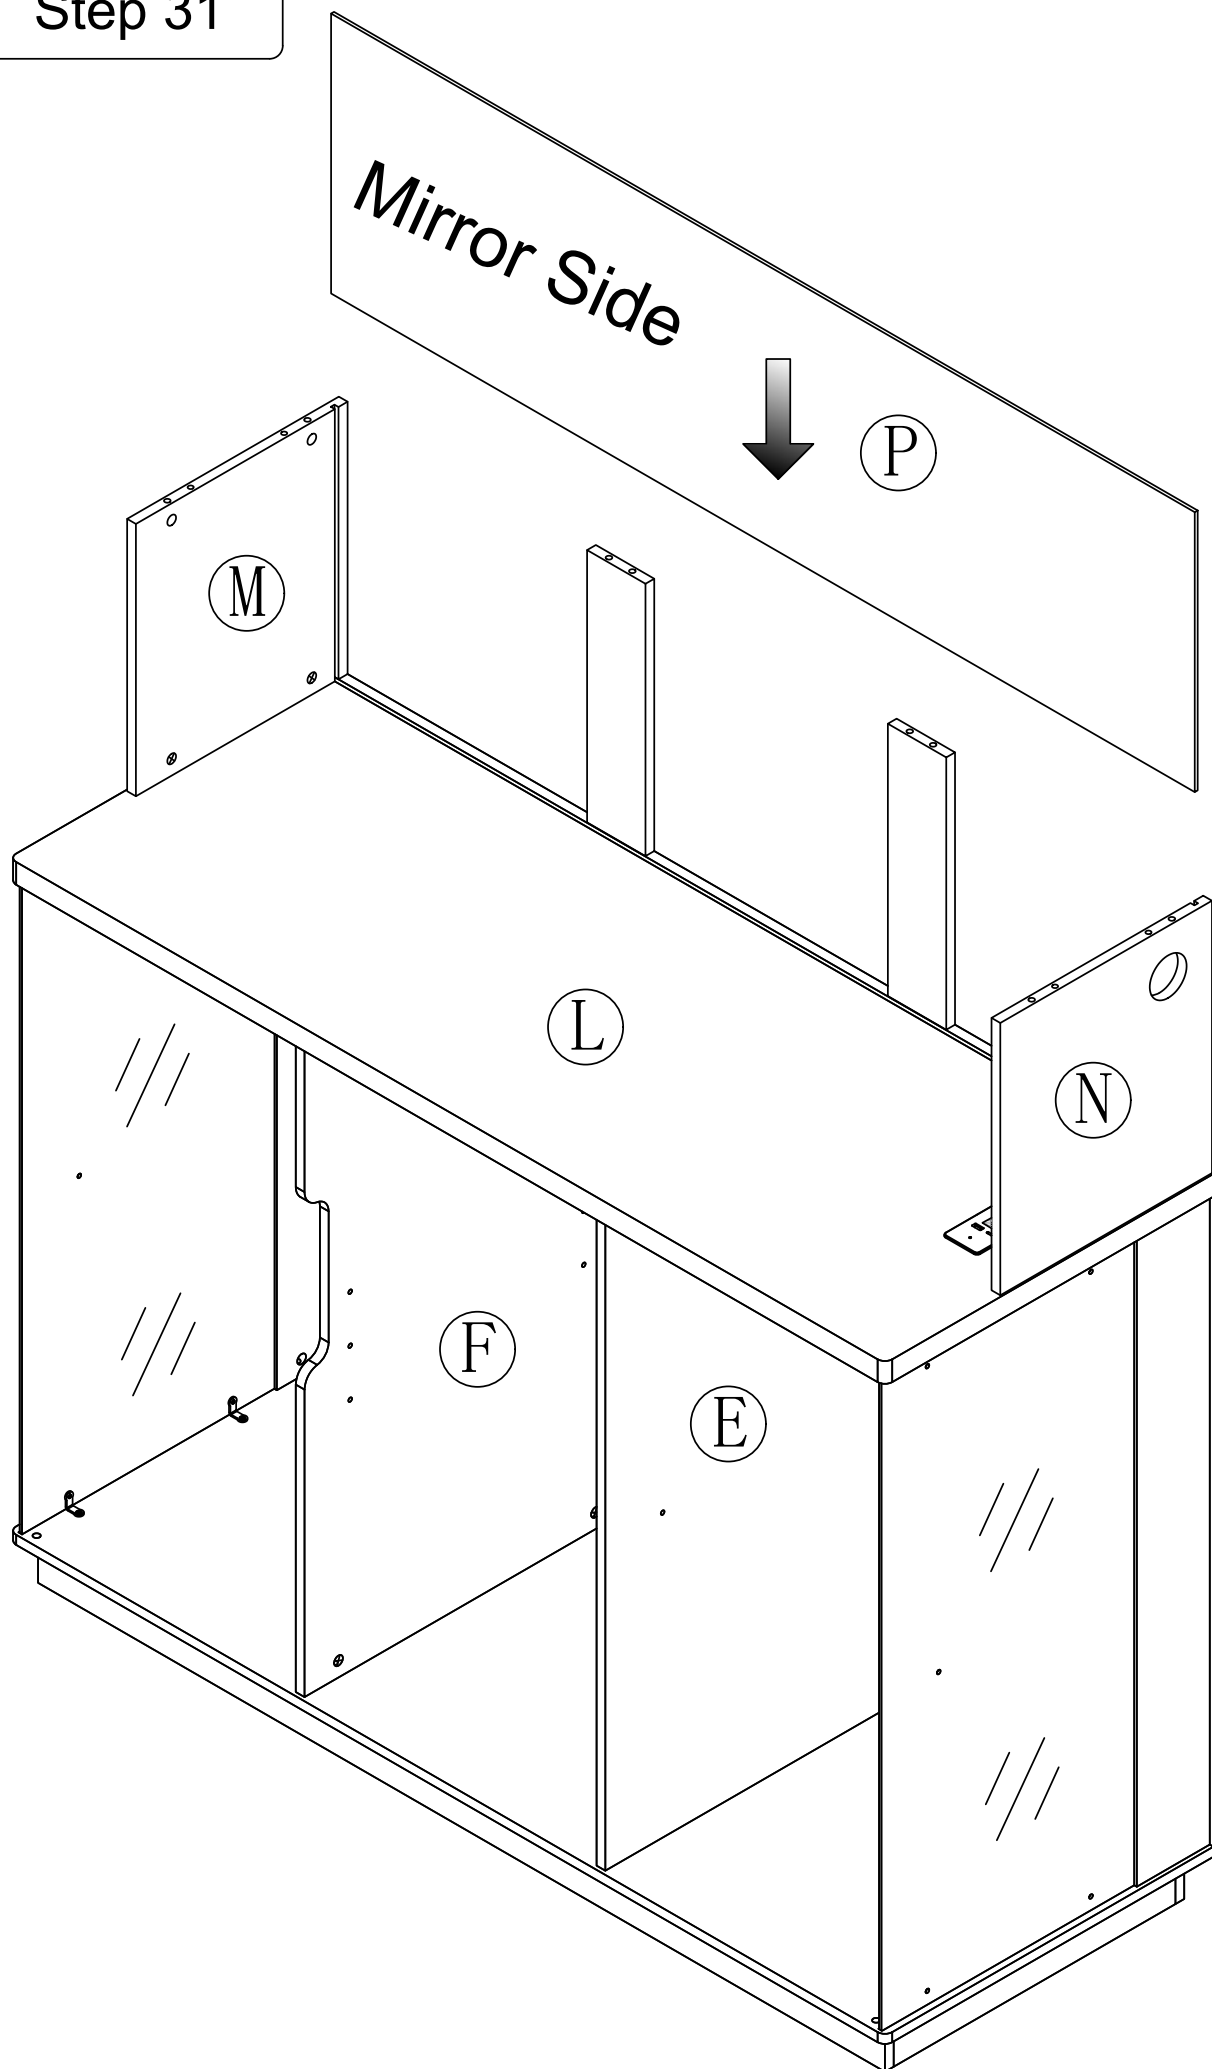


Step 32


④




x1


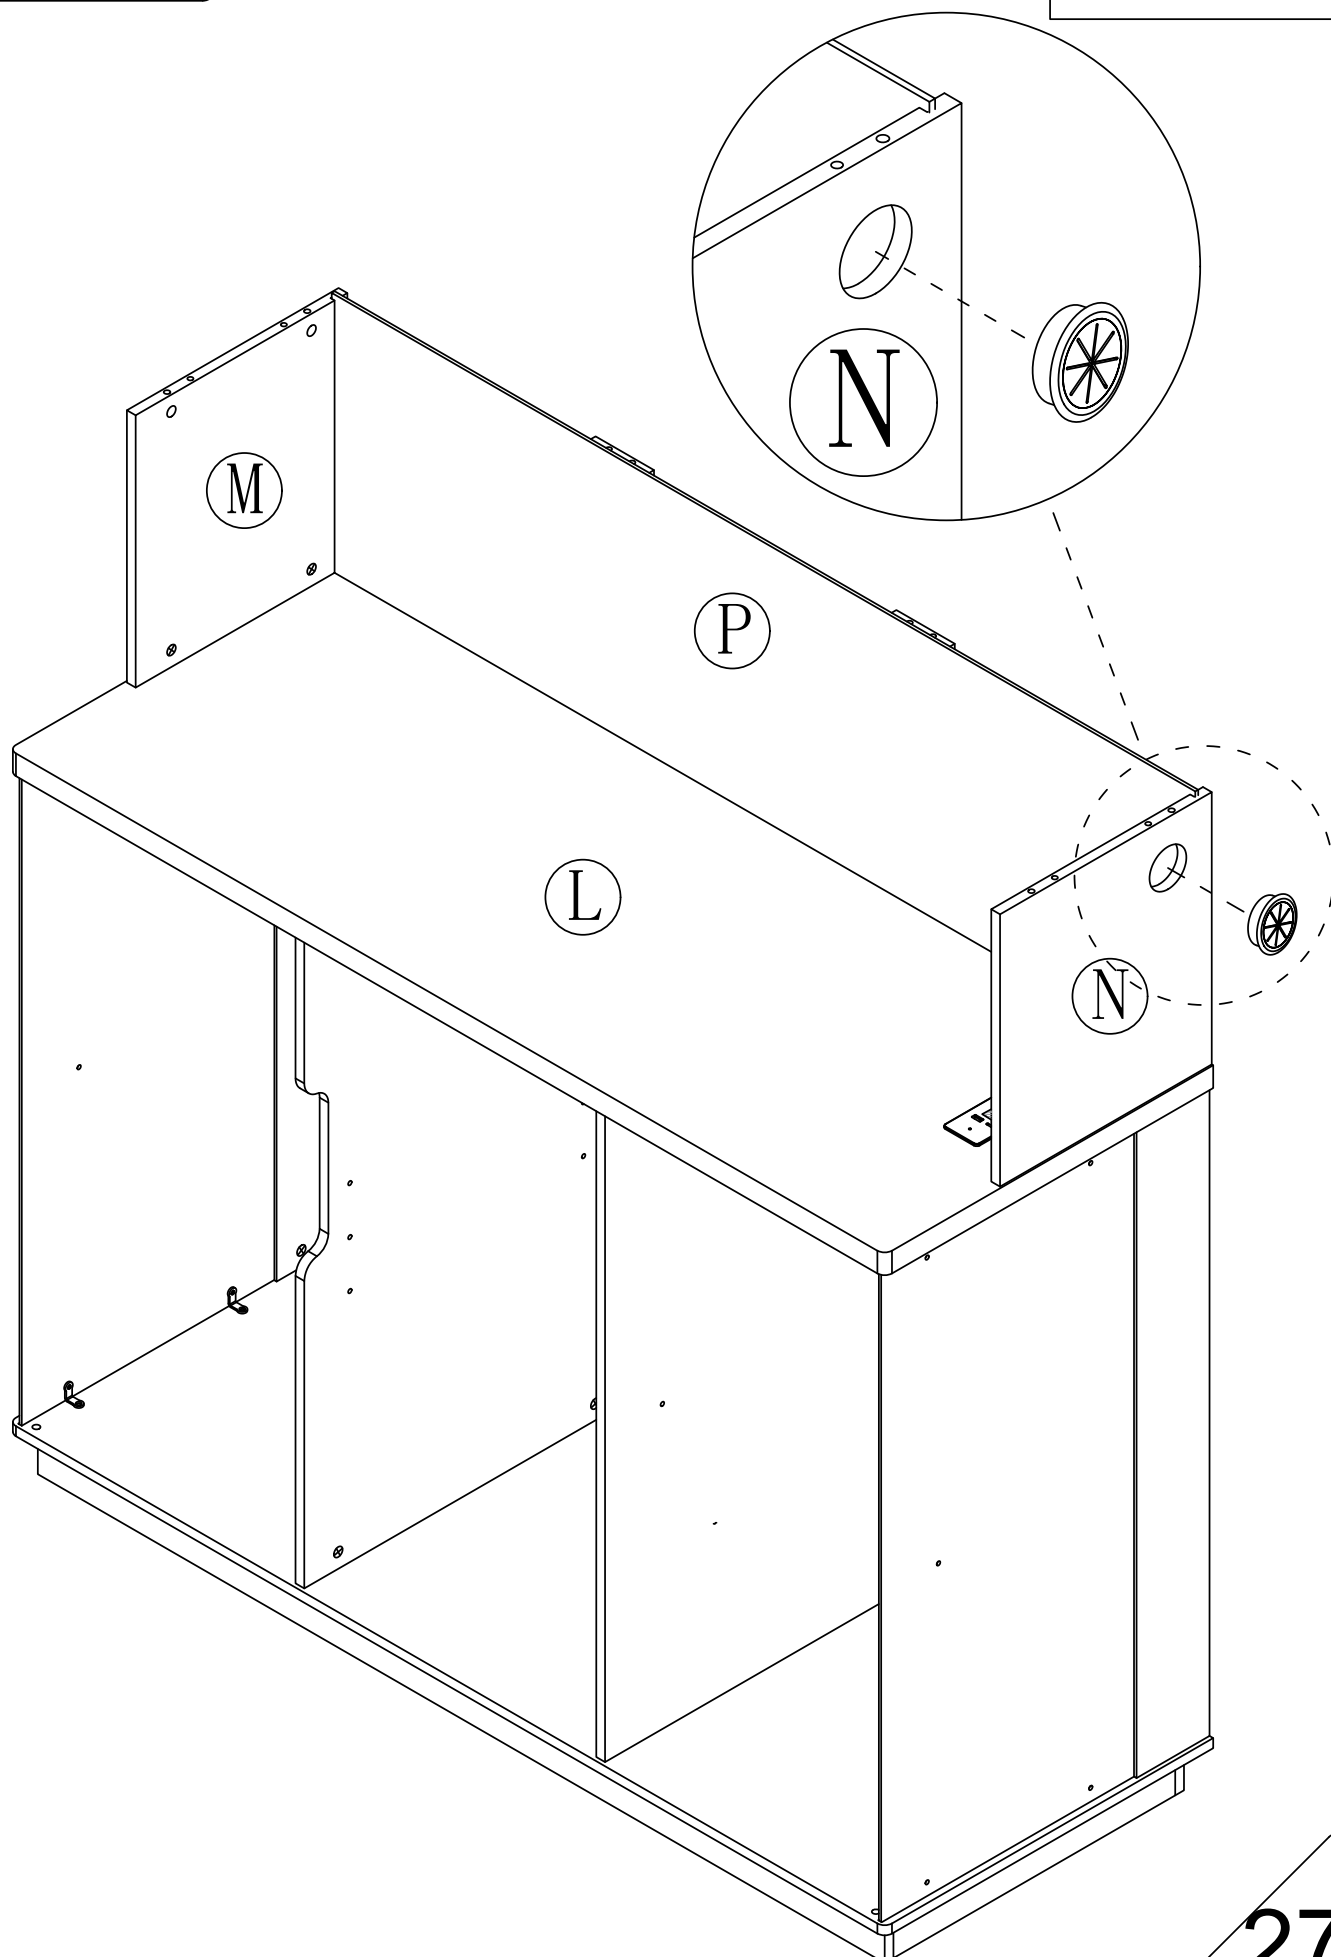


Step 33



③  x4

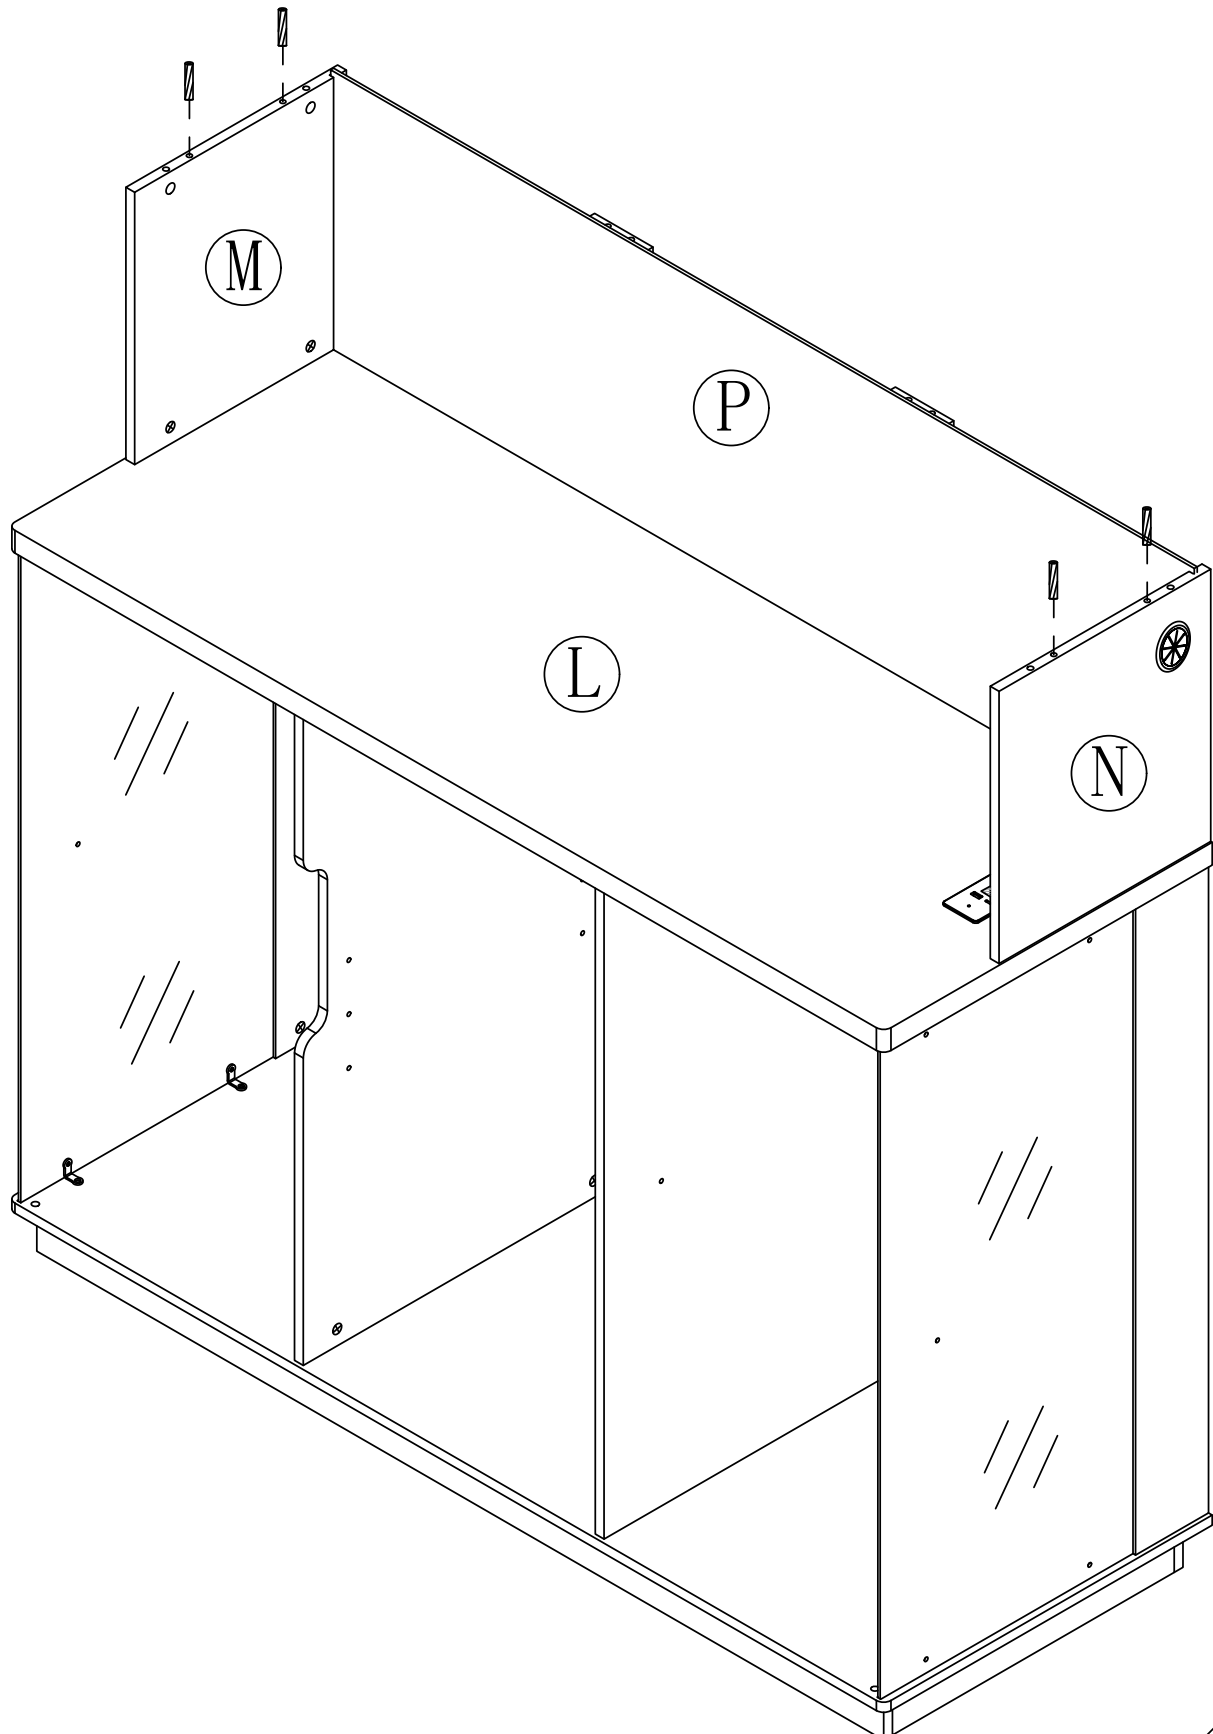

Step 34

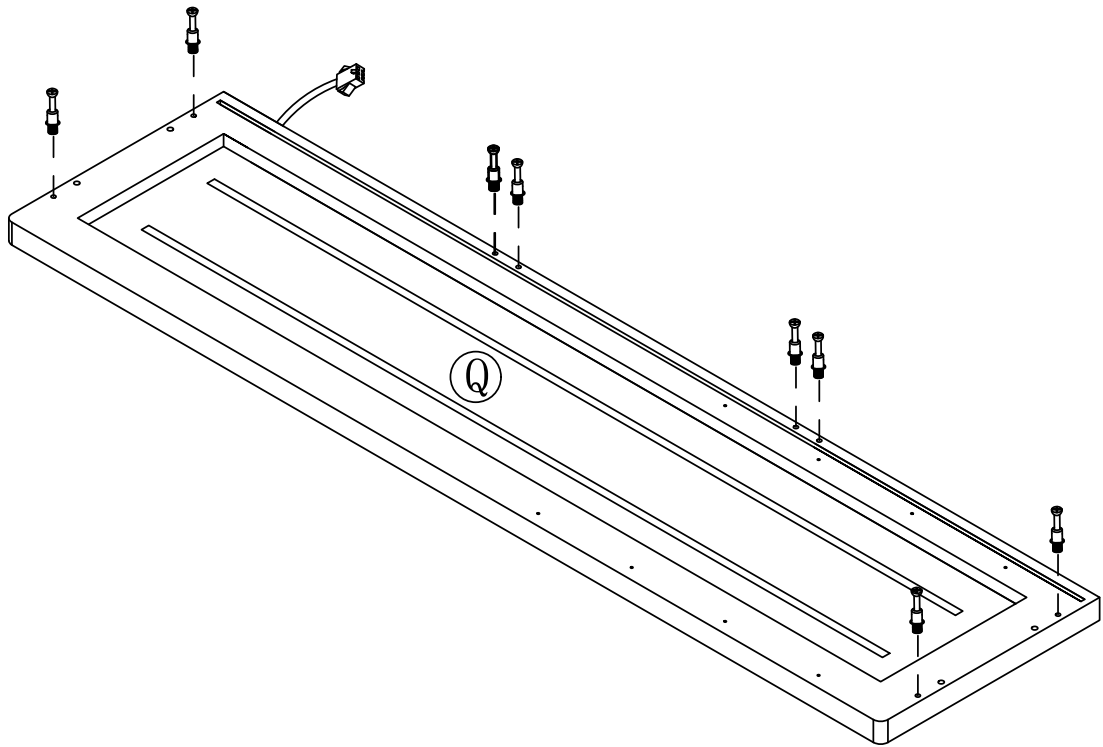

Step 35

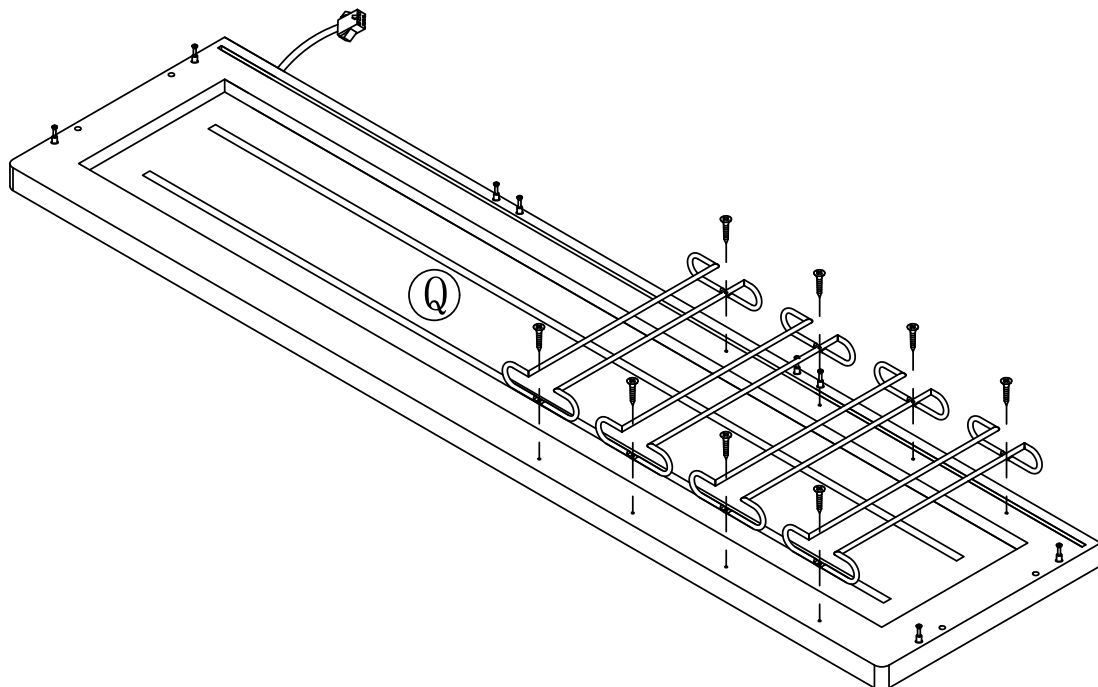


Step 36

2




x8

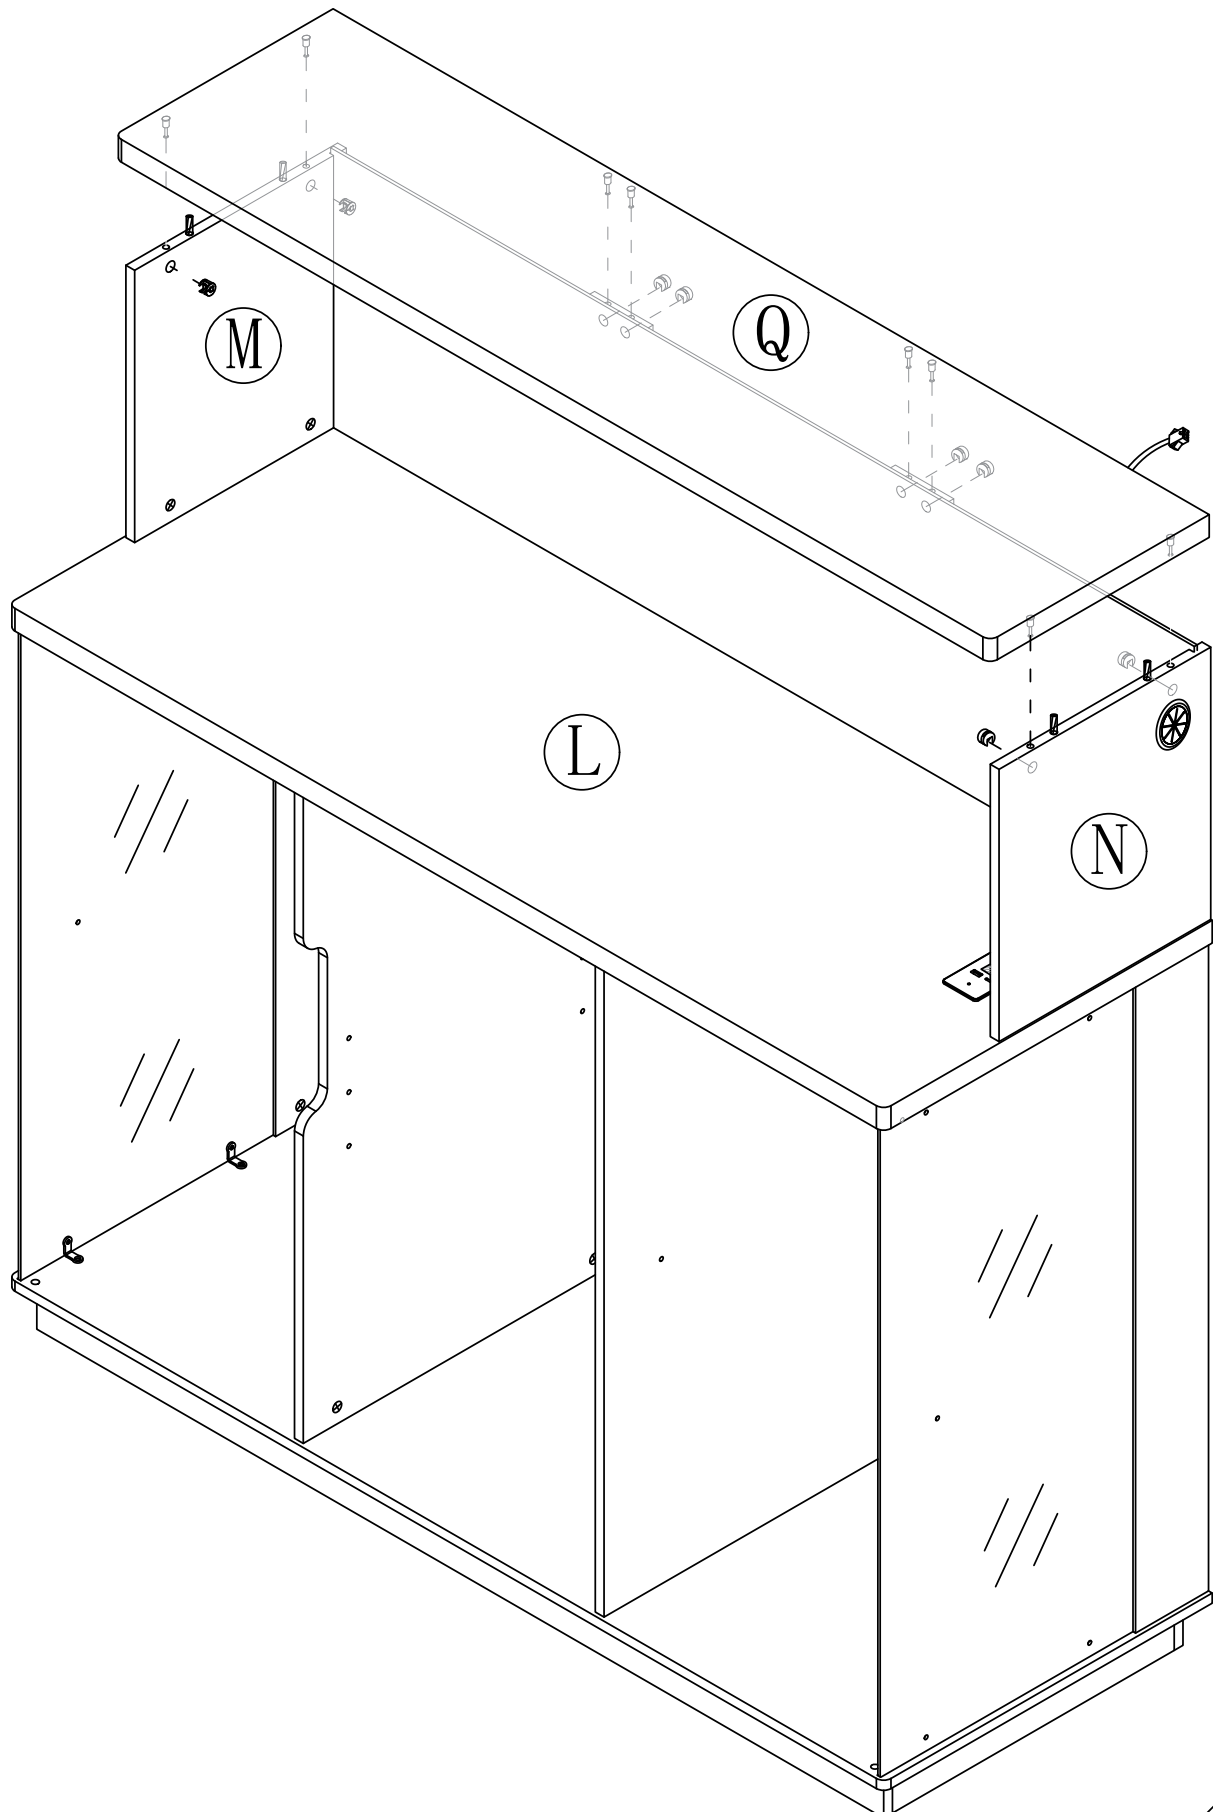


Step 37

8



x10



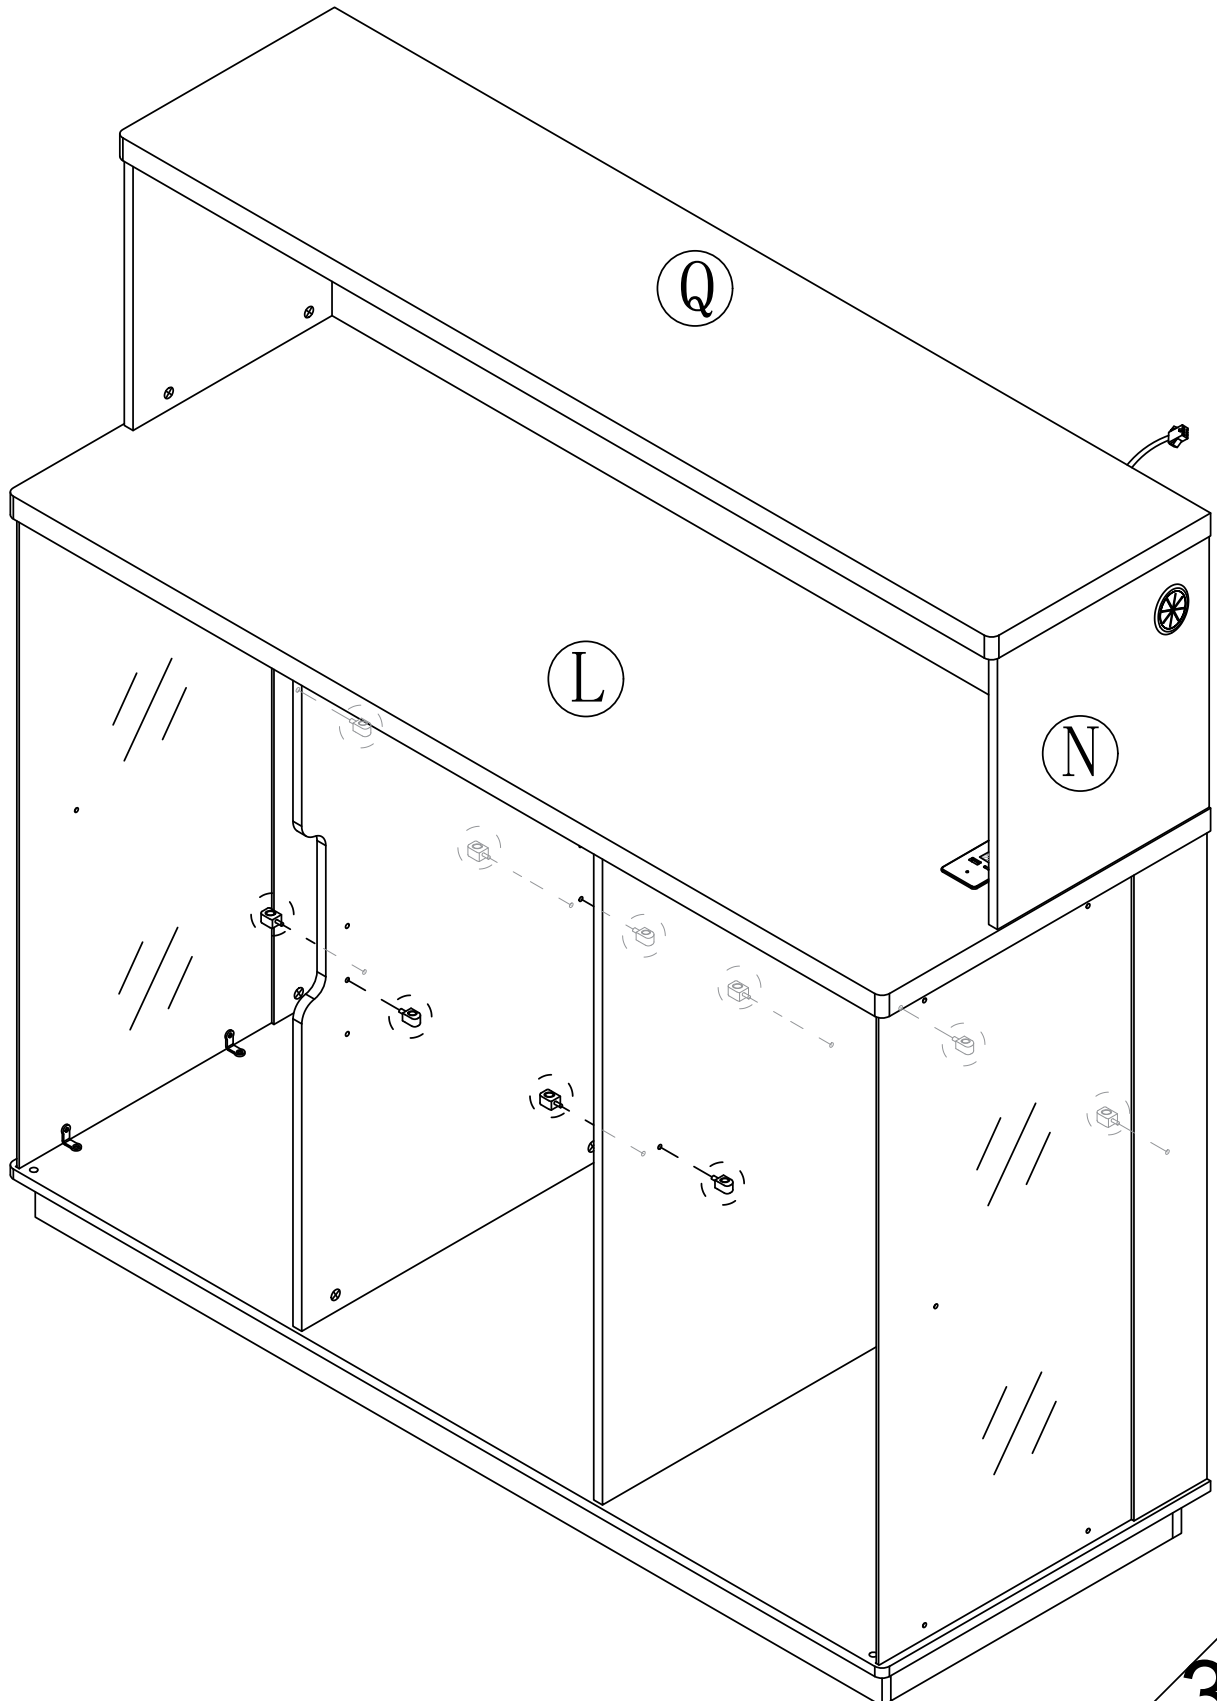


Step 38


12

 x^2 

x2

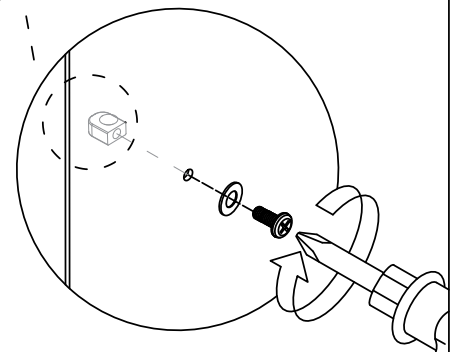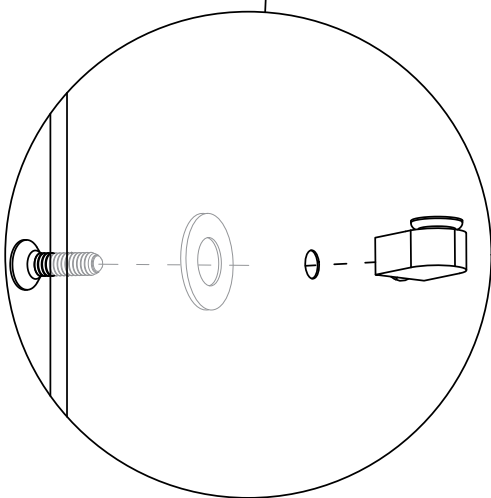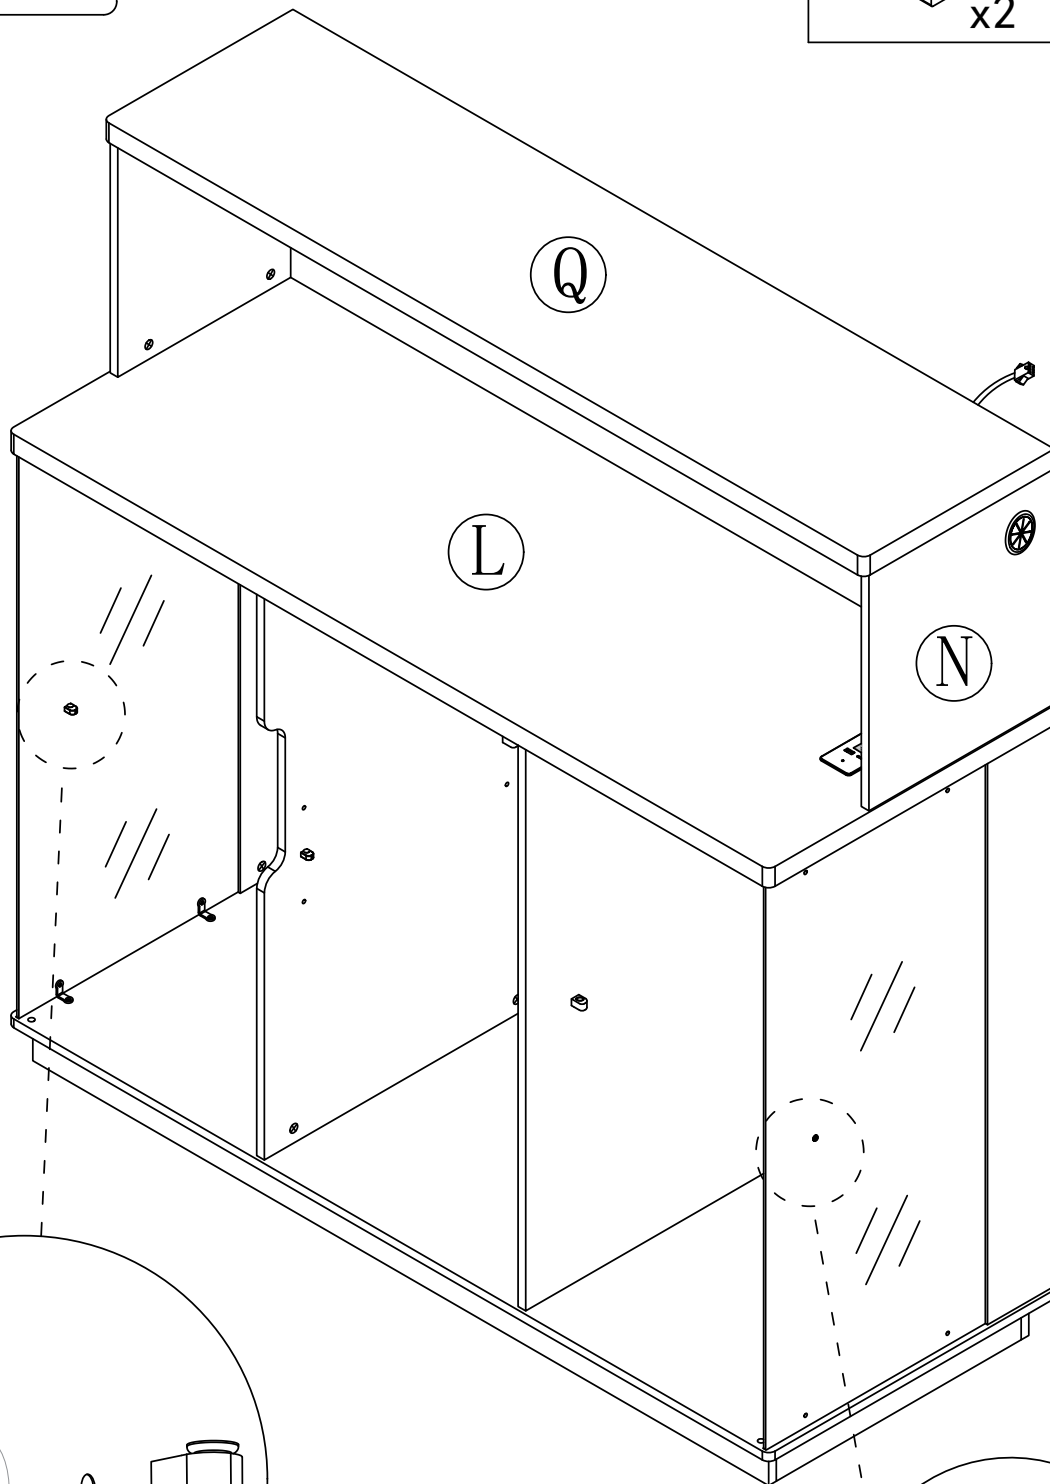
 x^2 

Step 39

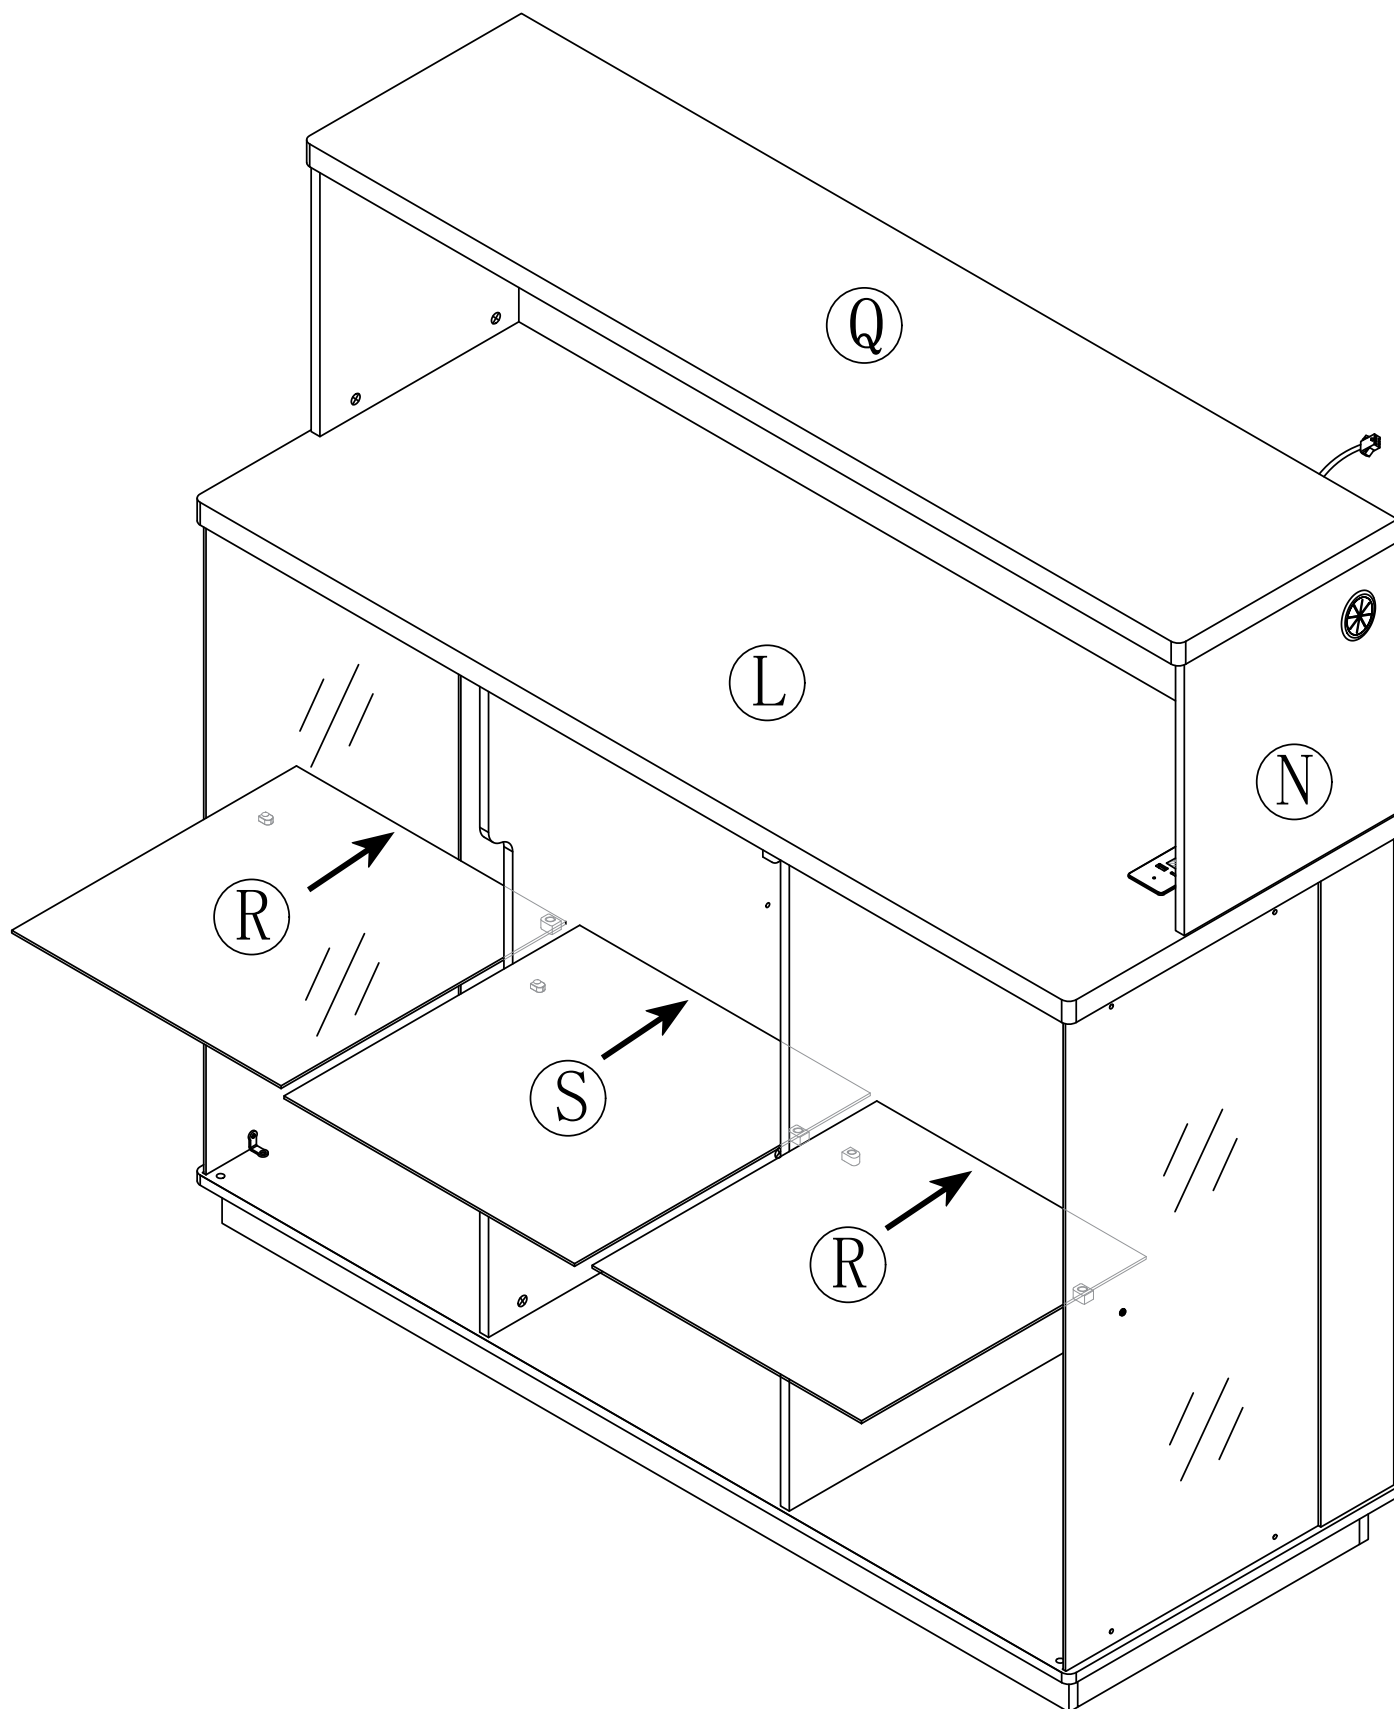


Step 40


First, completely unscrew the screws on the parts




Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

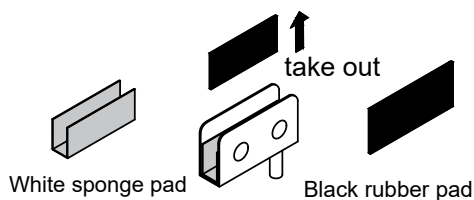

6




x1



x1

Left door

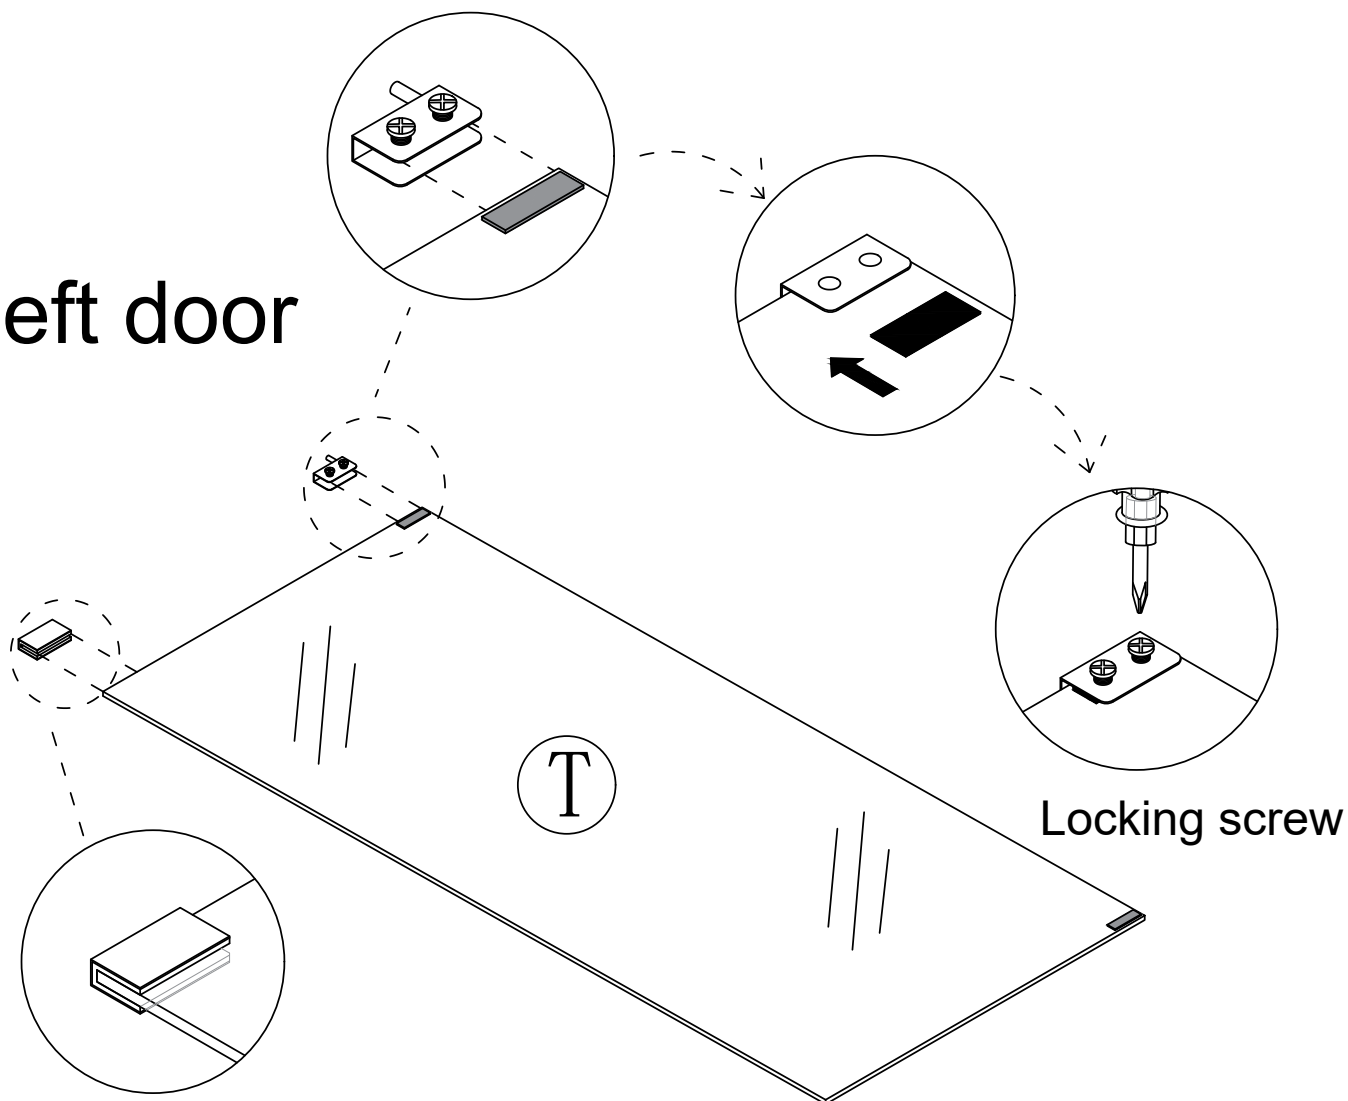


Locking screw


Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 41





Right door

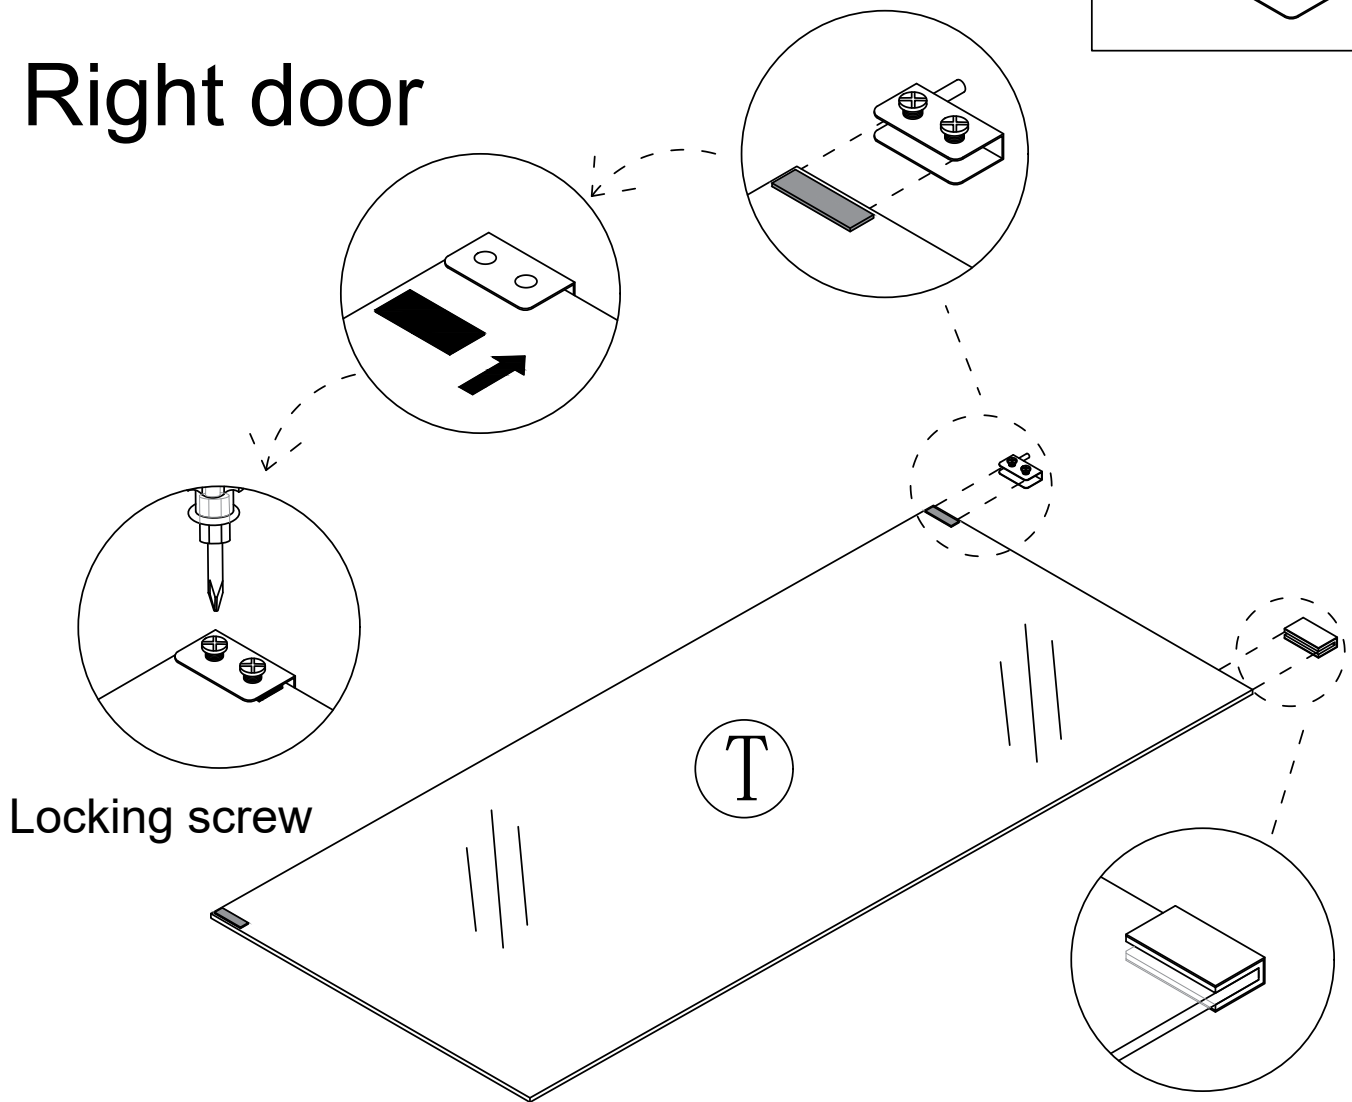

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction


Place the black gasket on the side where the screws are installed

Step 42

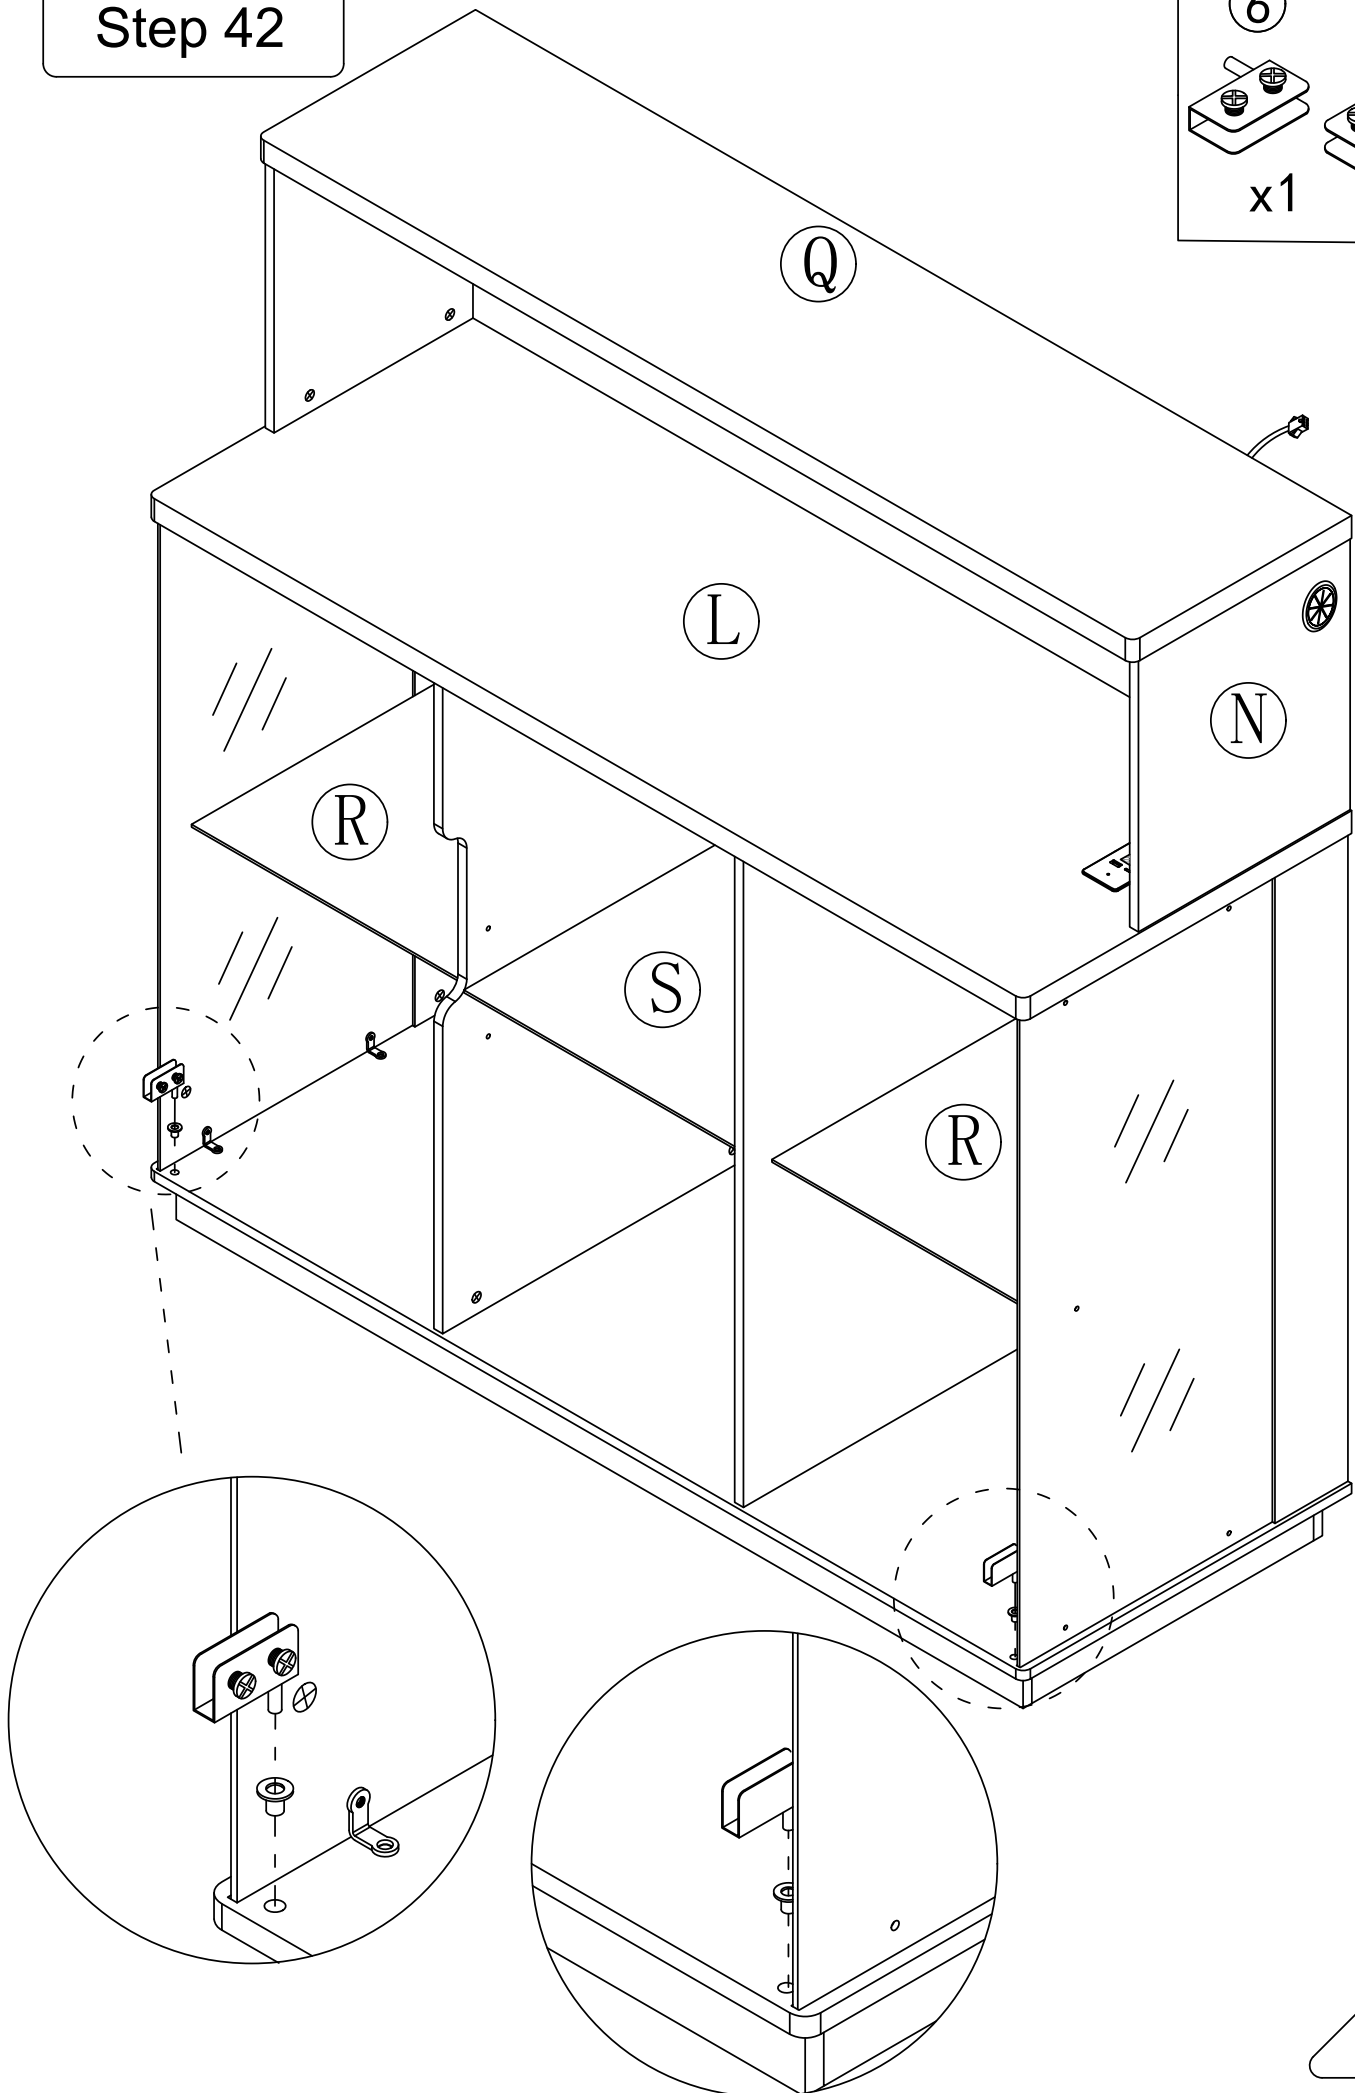


Step 43

⑥  x2




first




second

After installing the glass door, place the black gasket on the side where the screws are installed

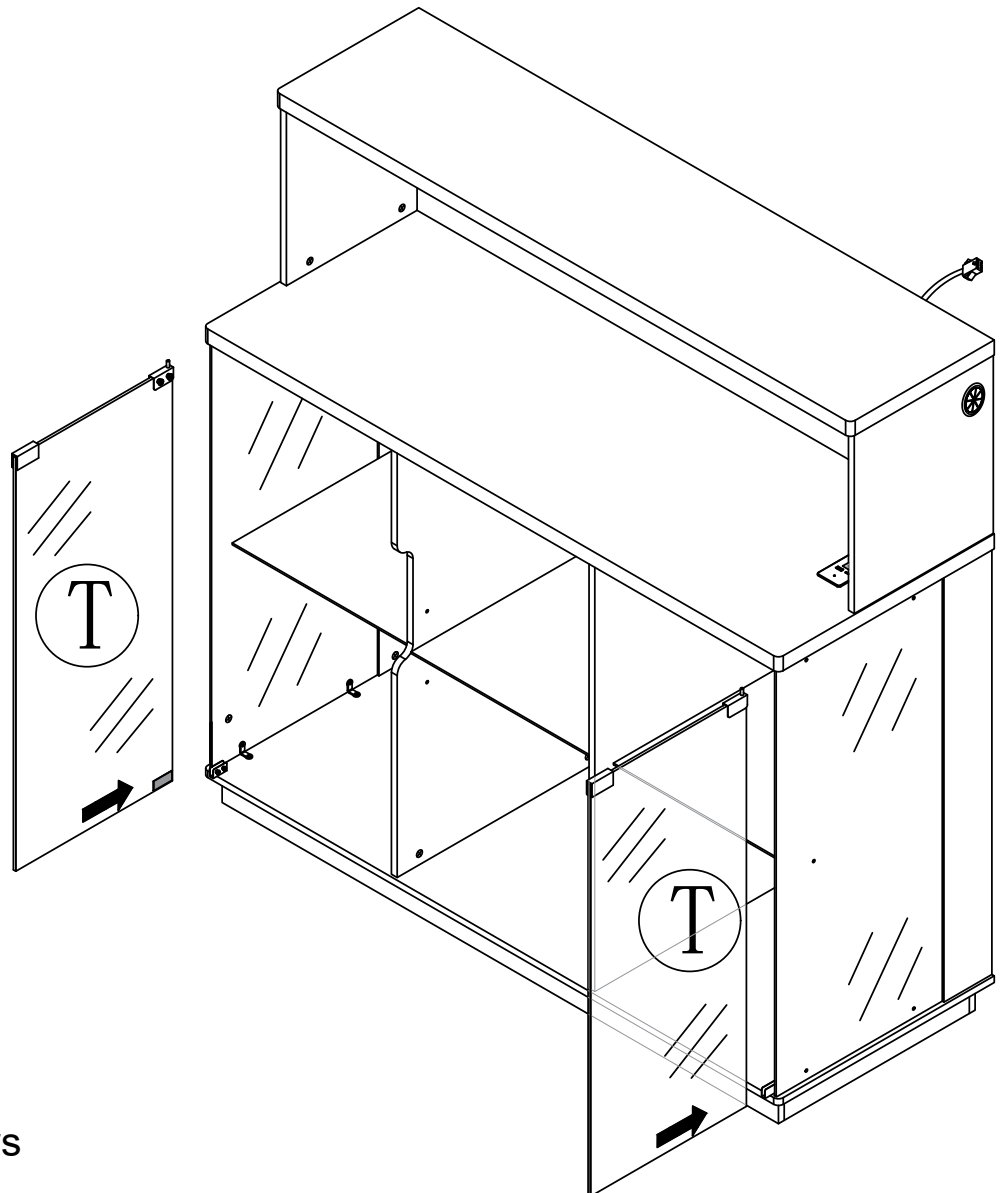

Pay attention to the direction of the door hinge during installation



third


Locking screw

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.



Step 44

The rebound device automatically opens and closes by pressing

Open the glass door

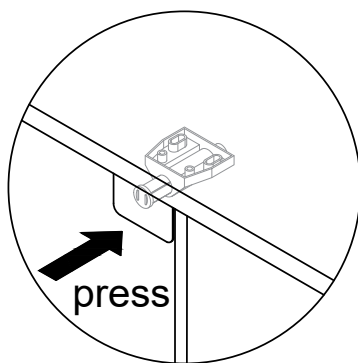


Close the glass door

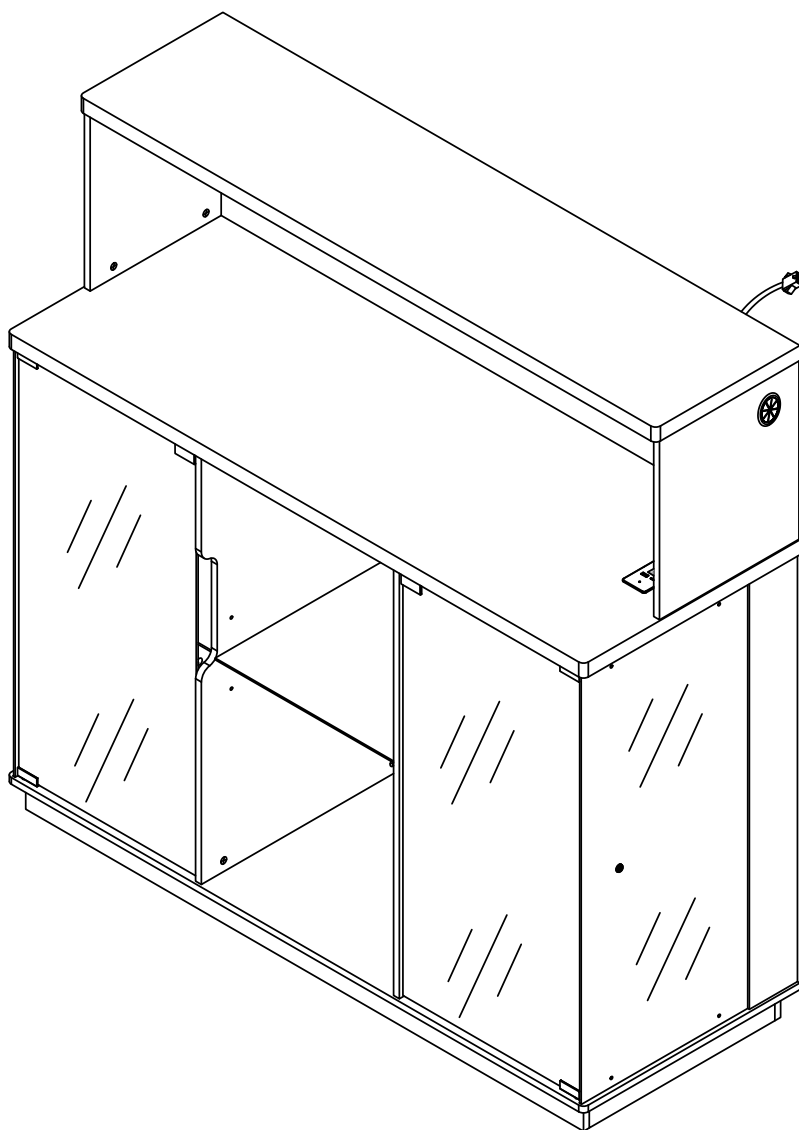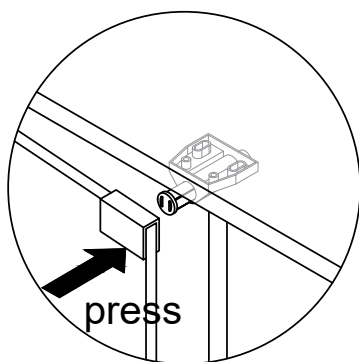


Step 45




9   x20

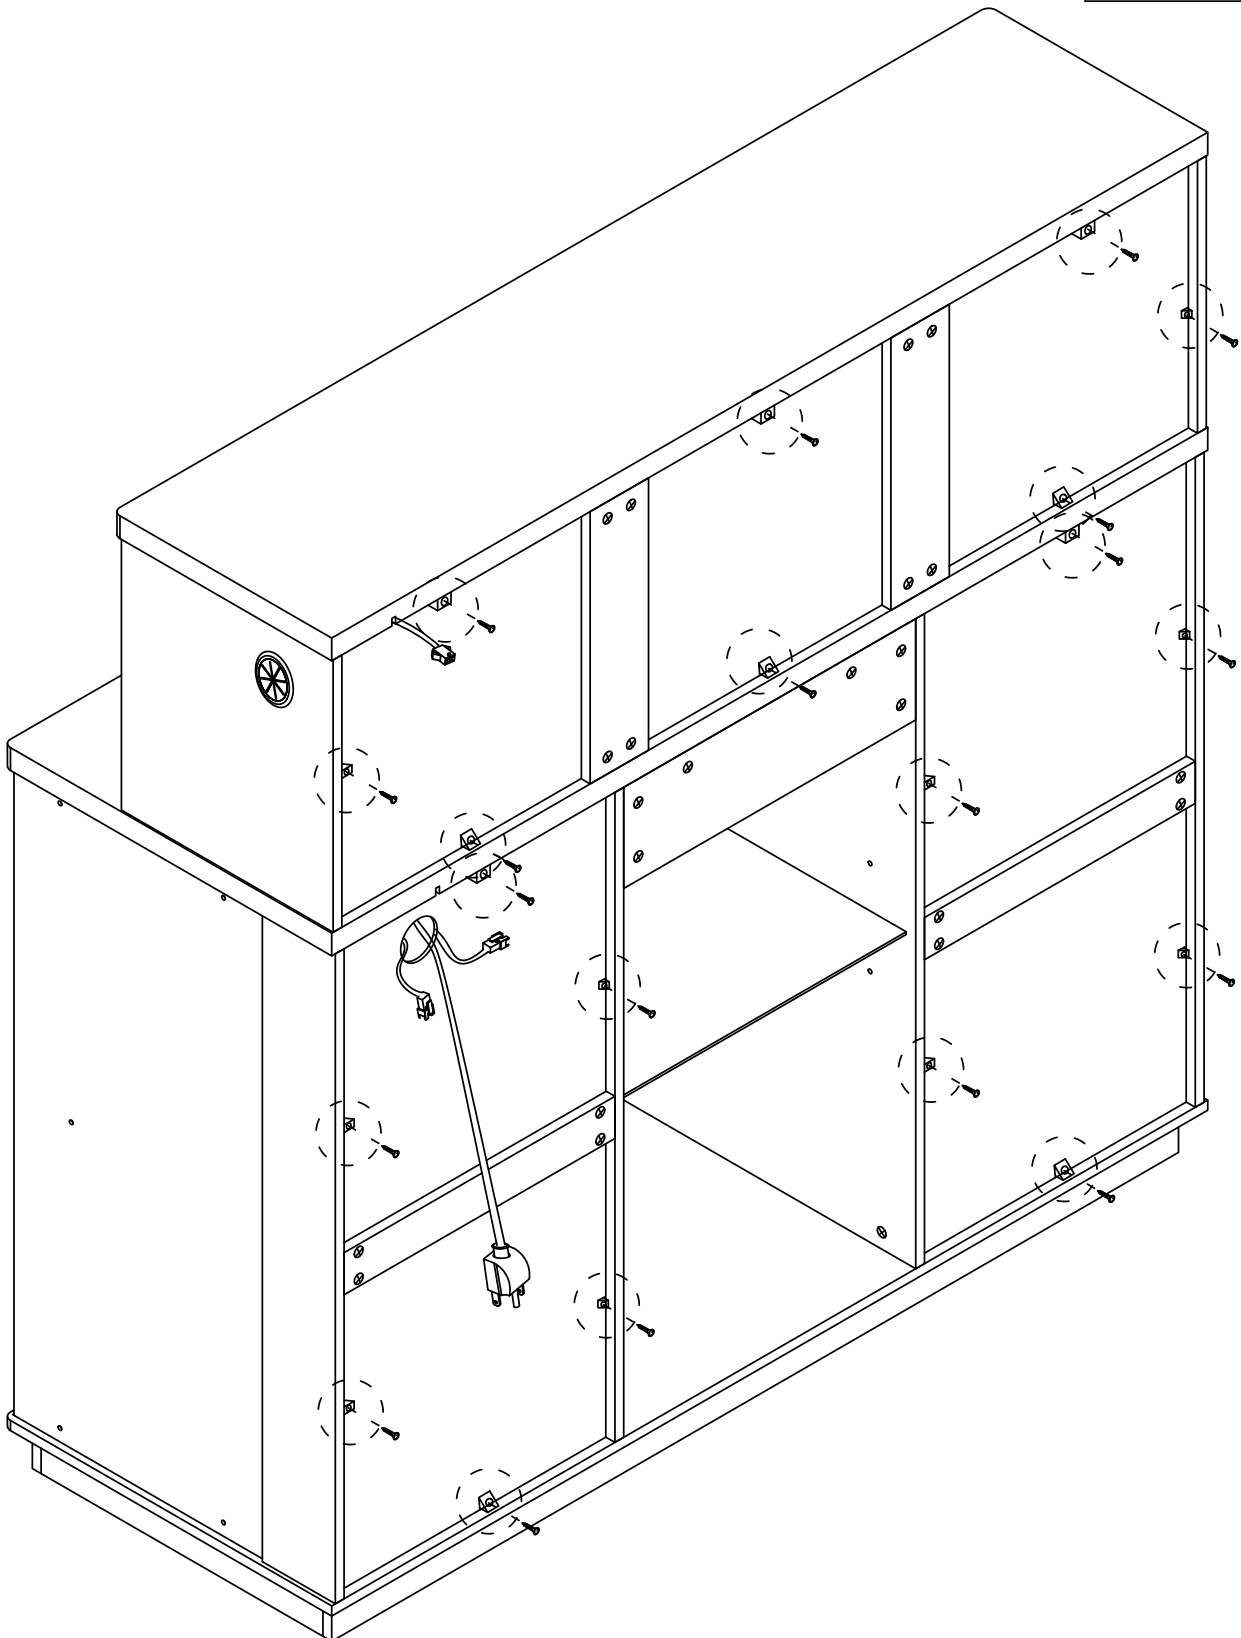

Step 46

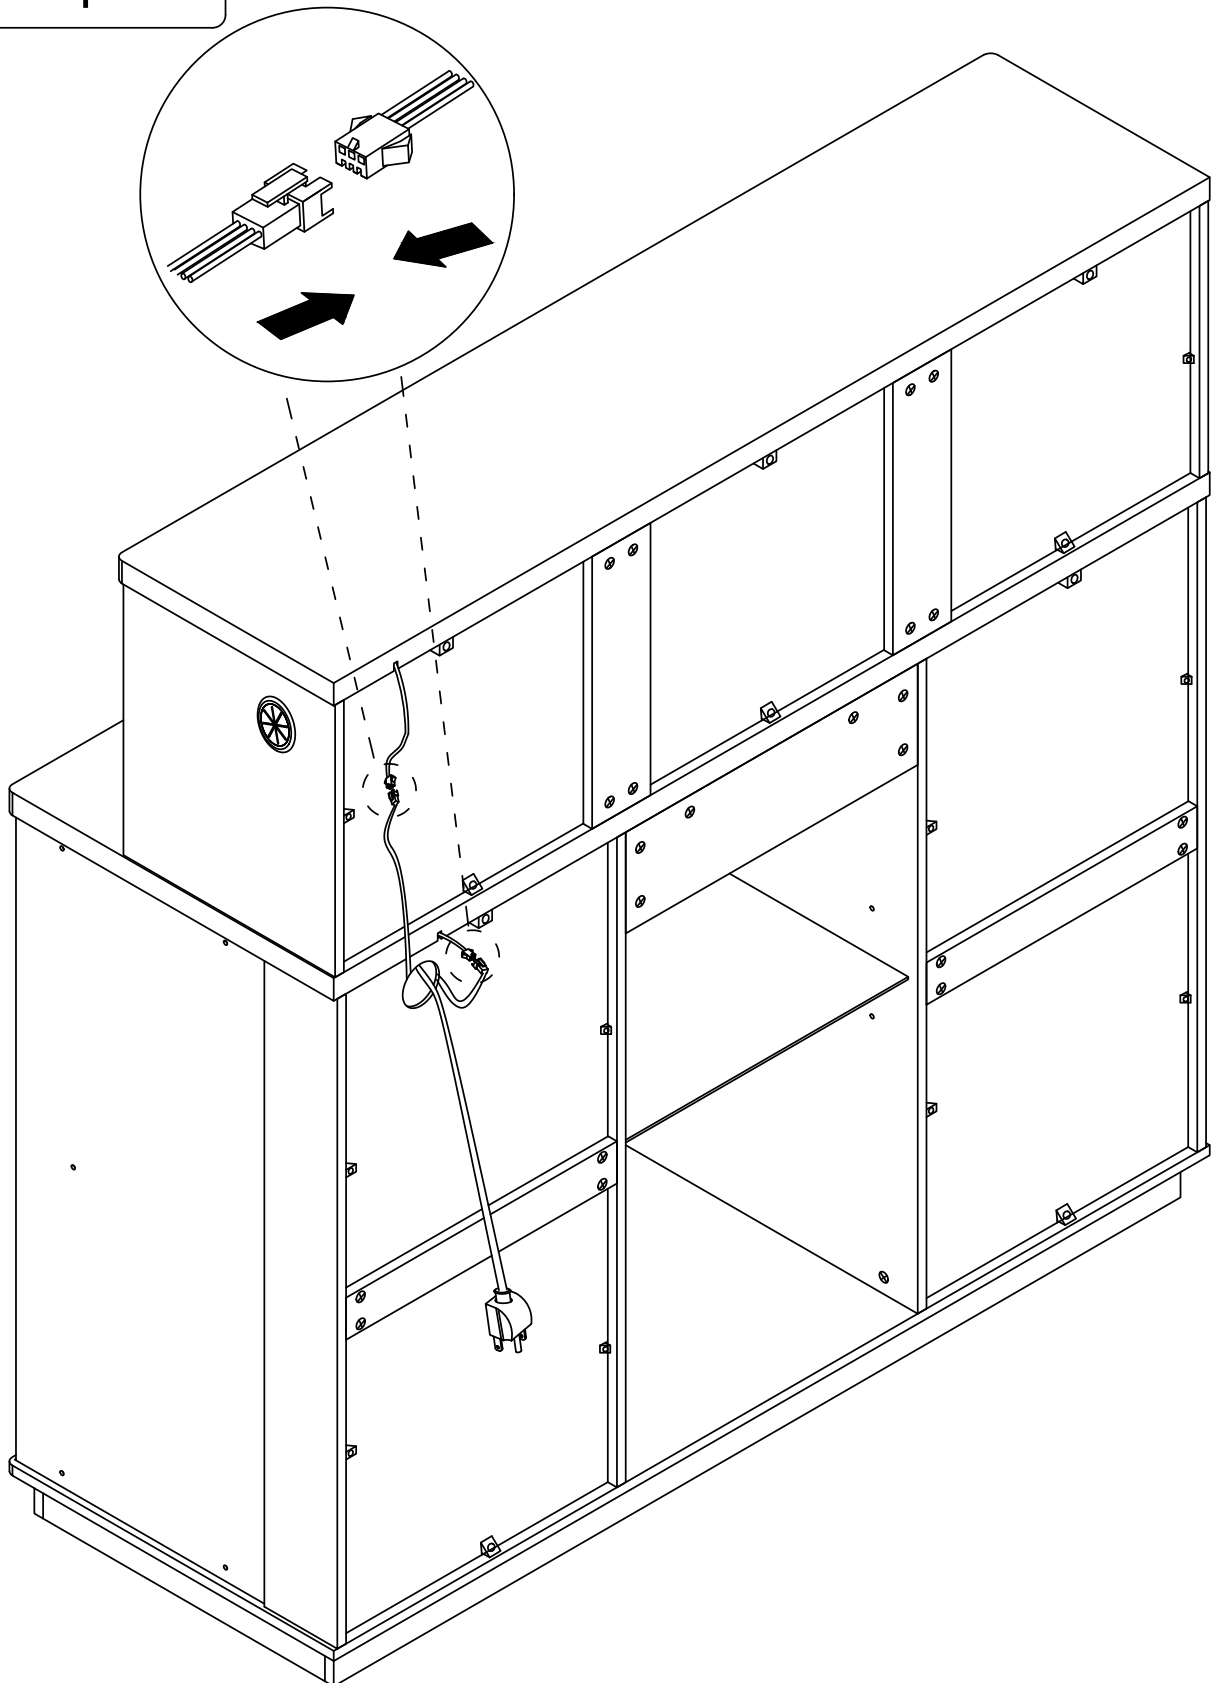


Step 47

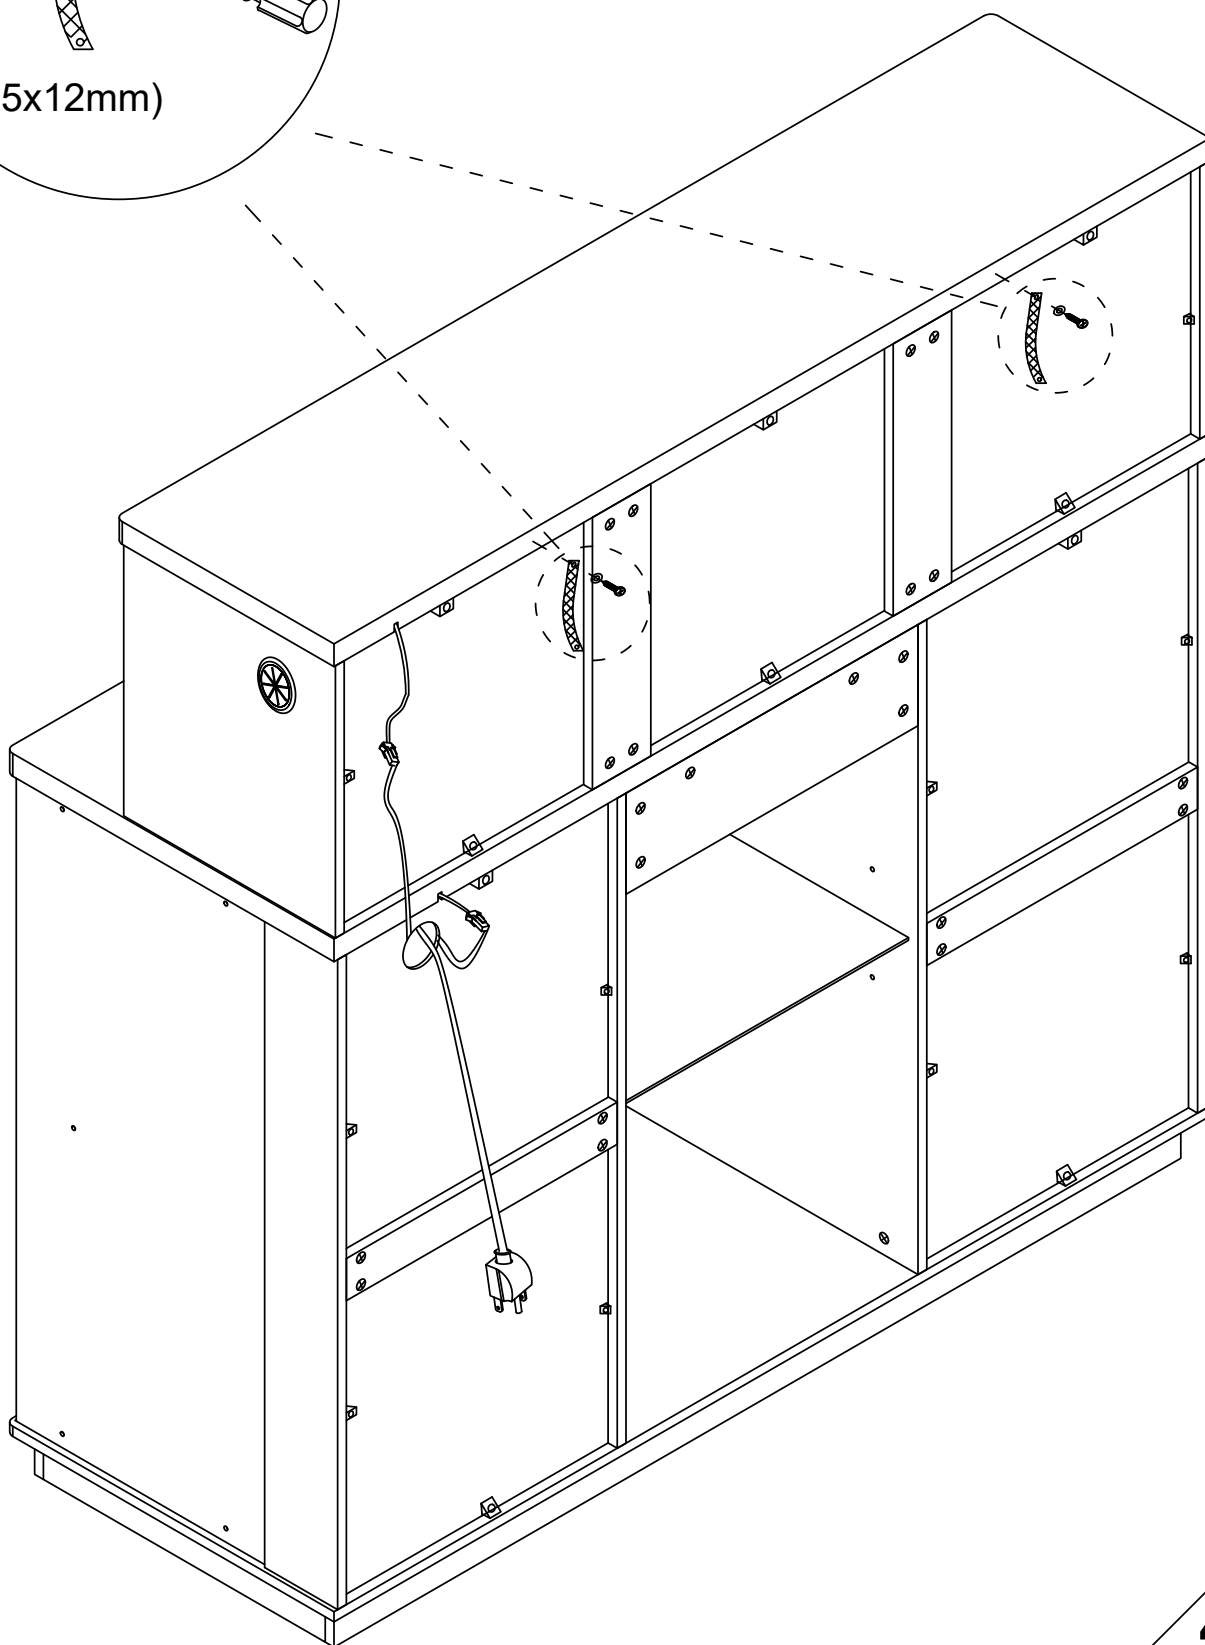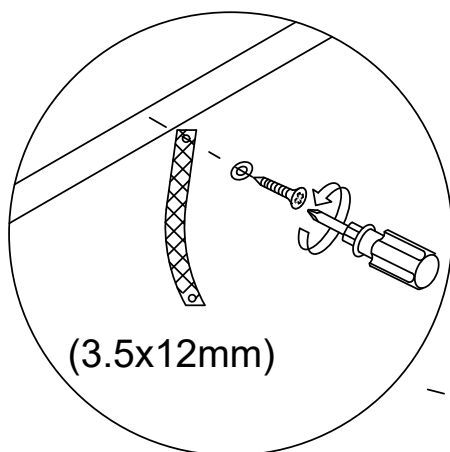


Step 48

use a ruler to measure the approximate height of the product on the wall, and then mark it with a pencil.

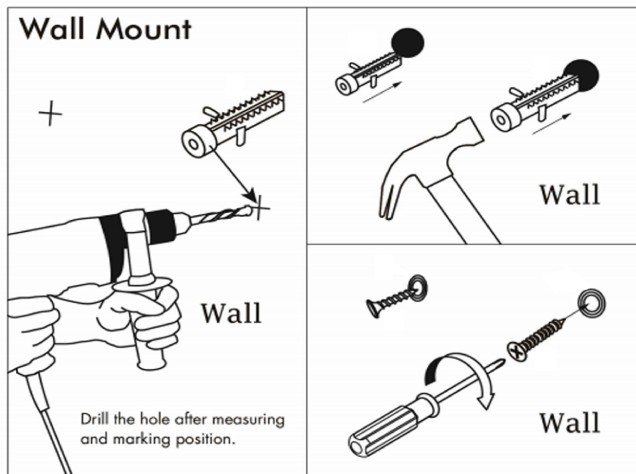



Use a tape drill to make holes in the wall that are suitable for the product screws.

14




Put the expansion bolt into the hole.

Pass the matching screws through the "anti-rewind" and tighten them to fix them on the wall.

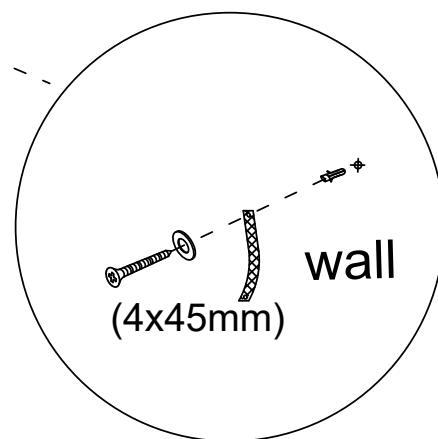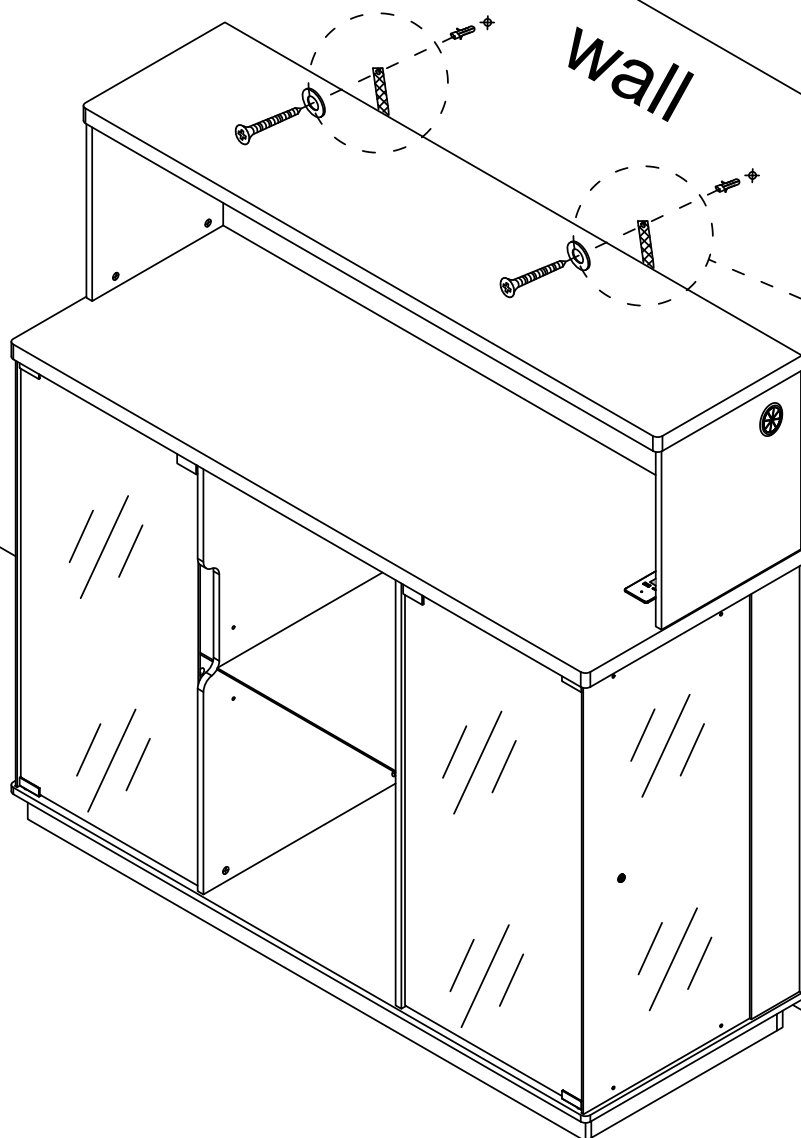

Step 49

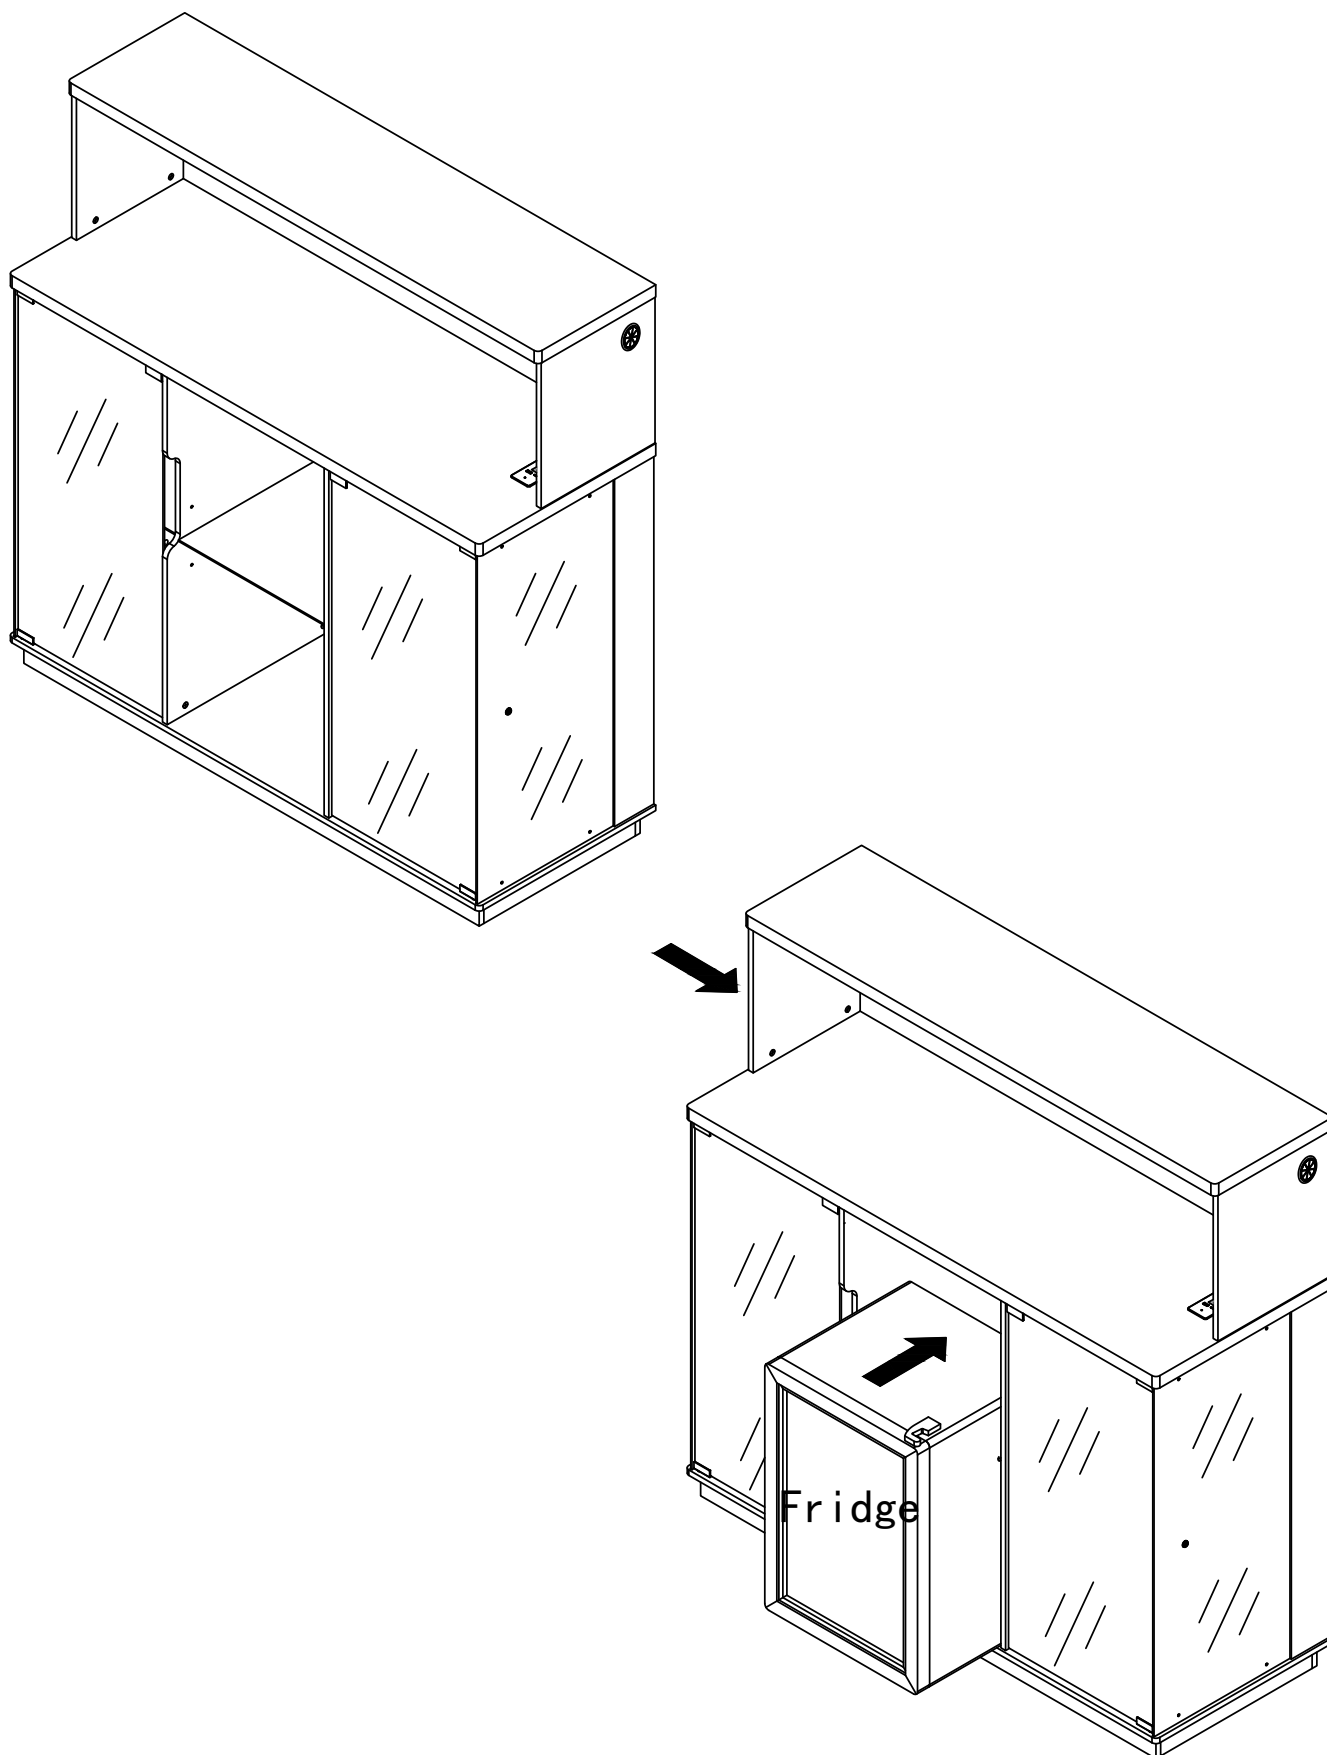

NOTE: You can remove the activity shelf and place the refrigerator at this position.

User's Guide

Thank you for purchasing this product.

To use this product, please connect it to a power source.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller.

It has 1 USB output port 1 Type-c port, and 2 socket outlets.

With 2 touch buttons, it can and turn ON/OFF the induction function, turn ON/OFF the light, adjust the light luminance, and change light colors.

The lights can be controlled through both the touch buttons and a dedicated app.

Operation



This touch button is used to turn the light on/off, adjust brightness, and switch the color of the lights.


- i. Single Click: Turn the light on/off.
- ii. Quick Double-Click: Switch between 7 static RGB colors.
- iii. Long Press (2+ seconds): Adjust the light luminance.



This touch button is used to switch dynamic phantom colors and turn ON/OFF the induction function.

- i. Single Click: Switch to Phantom Mode, with 5 magical color transformations available.
- ii. Human Body Sensing Control: Long Press (3+ seconds): Turn on The key press indicator light is on.)
Long Press (3+ seconds): Turn off (The key press indicator light is off.)


By default, the human body sensing is enabled upon initial power-on, and the indicator light is on.

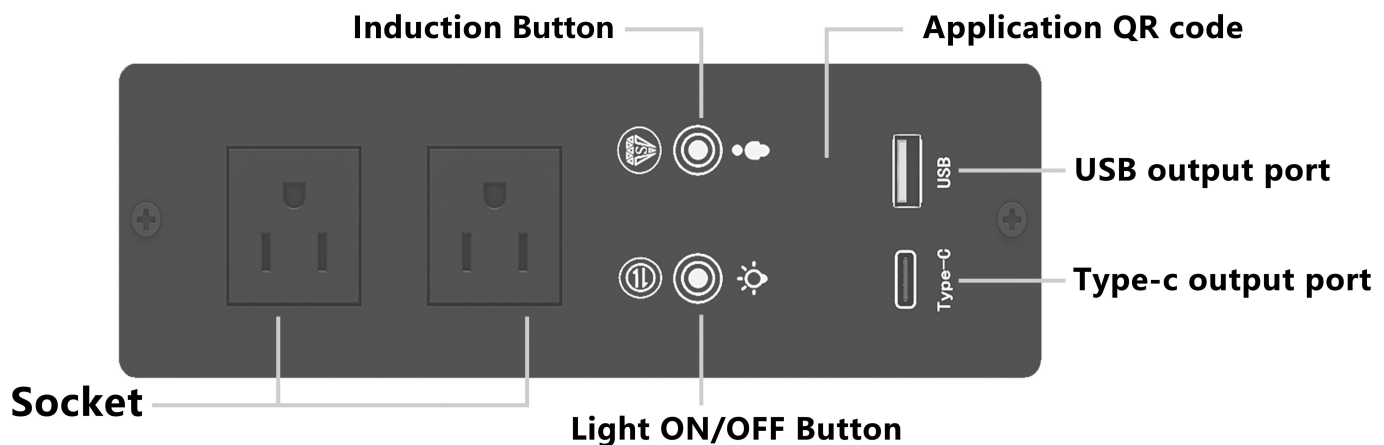

⚠ ATTENTION PLEASE


1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If you have any questions when installing, please feel free to contact us. Thank you.

Smart Box Plug Power Off

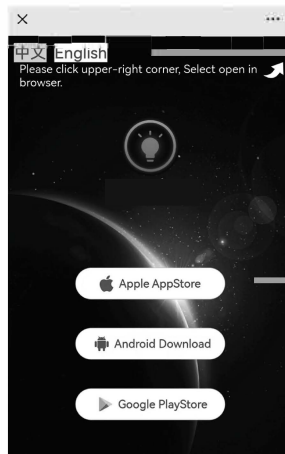


Select English Language

Select the corresponding device to download.
Note: If the download fails, please turn off the "Enhanced Protection" in the Pure Mode settings of the device.

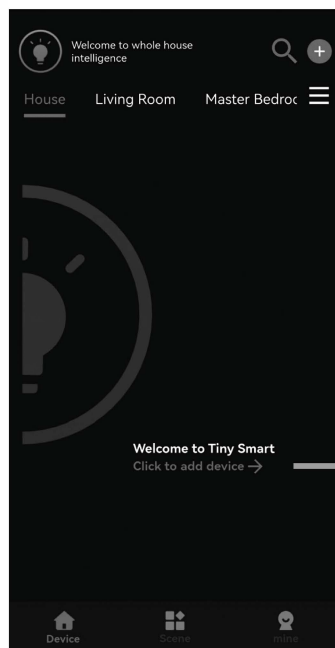


1

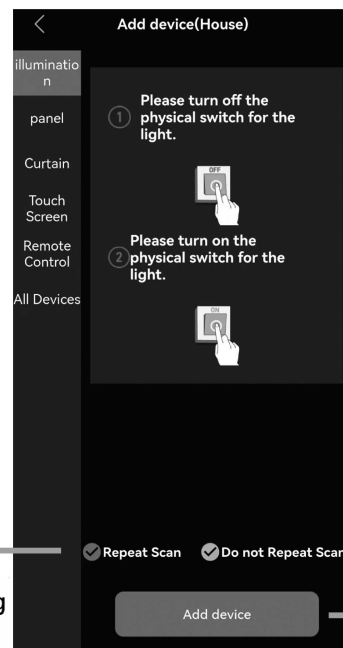

2

It turns blue after clicking

3

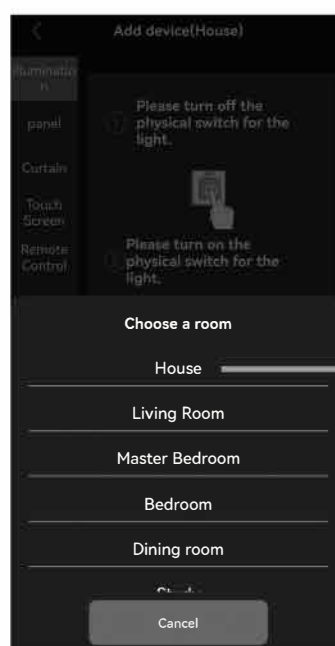

4



5

Unplug the smart box




6


⑦ Plug in the smart box power plug.




The appearance of this program icon indicates that the matching is complete

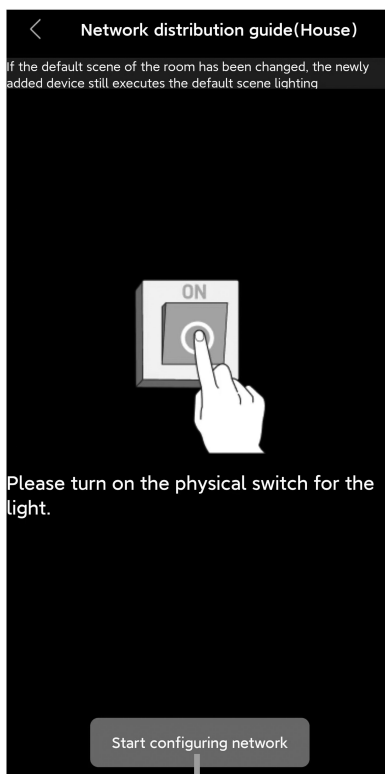


⑧

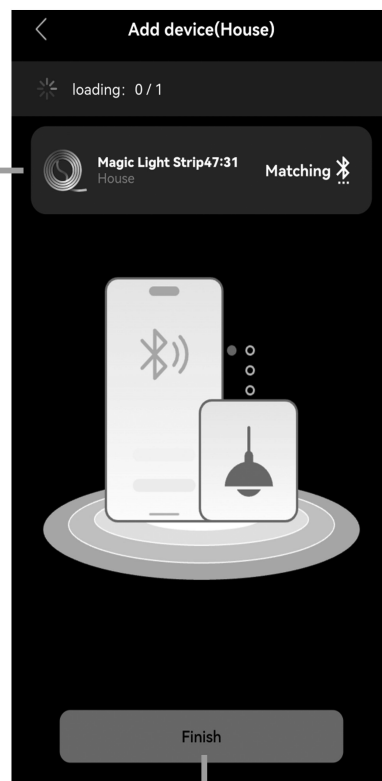

⑨

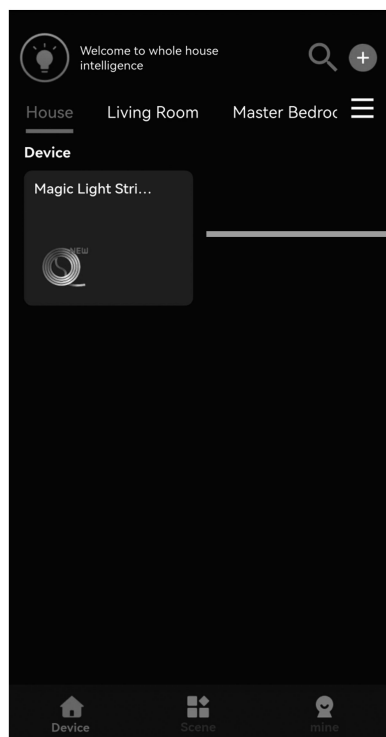

⑩

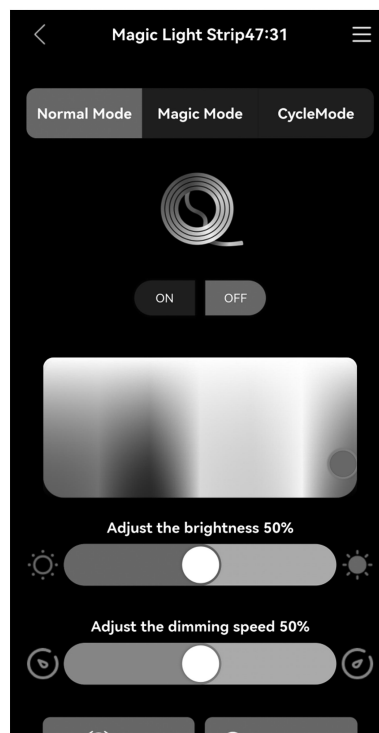

Now you can freely adjust the lighting according to your preferences