

SPECIFICATION SHEET

BPL - 304

Fixture Specifications:

Housing: Cast Brass

Stem: Die-cast brass stem, with 1/2 NPT hub on bottom

Finish: Available in **BRZ- Antique Bronze**

Socket: G4 Bi-Pin socket

Lamp: 12V, JC Bi-Pin bulb 20W standard, 20W Max
LED lamps available in 3W, with
2700K-warm white color temperature.

• Area Lights


• Brass

Wiring: Fixture is prewired with a 3ft 18-2 direct burial cord. Wire nuts sold separately.

Mounting Spike: Black 8 1/2" ABS spike with 1/2" NPT male hub on top

Electrical Notes: A 12V transformer is required.
Voltage range for 12V halogen lamps are 11V-12.5V
Voltage range for LED lamps are 8V-21V.
Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited five (5) year warranty on fixture housing and stem against manufacture's defects.

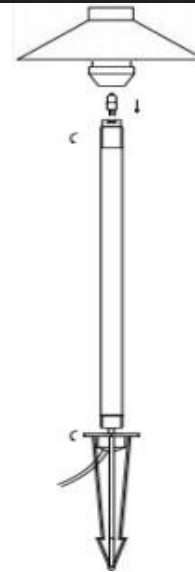

AVAILABLE LED LAMPS

LAMP NUMBER	BEAM		LUMEN	COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
	WATTS	SPREAD				
LED3WG412V	3	360°	270	2700K	30000	20 Watt

AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		LUMEN	COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN			
J C10W	10	360°	75	2700K	2000	
JC20W	20	360°	190	2700K	2000	

