

delta

5-Tier Heavy Duty Wall Storage Rack

Assembly instructions HDRS3000

Parts

- A** x4 — Uprights
- B** x10 — Arms
- C** x10 — Pin + Spring Clip
- D** x16 — Hex Bolt
- E** x4 — Connecting Spacer


Tools Required

Hand Drill 5/32" (4mm)

Socket Wrench 1/2" (13mm)

Level




Tape Measure



Way of locating studs within the wall (see hardware store for advice)

Assembly video

Visit designbydelta.com/downloads

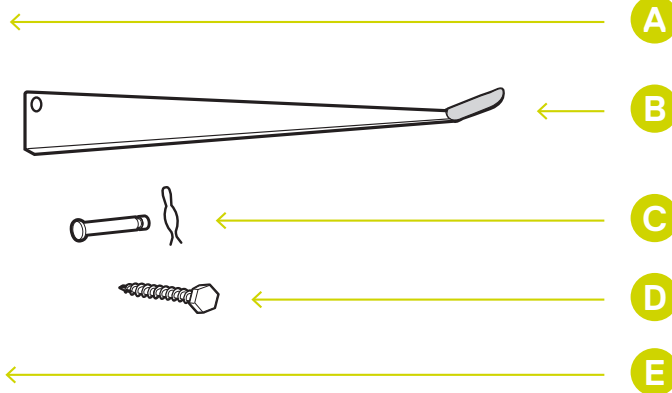


- 1** Place uprights against located stud on wall and mark location for holes. Ensure uprights are horizontally aligned. Drill pilot holes. Then secure uprights to wall using bolts provided. Use connecting spacer to securely attach second upright. (Fig. 1).




IMPORTANT SAFETY NOTE

Beware of drilling into electrical wire or pipes within wall!

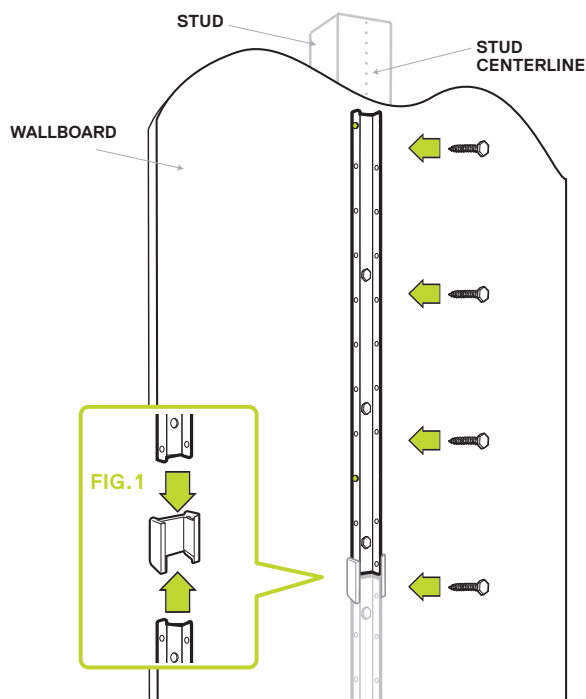

- 2** Position arms as desired. (Arms can be positioned in 2" height intervals for maximum storage capacity). Secure with pin and spring clip. (Fig. 2).

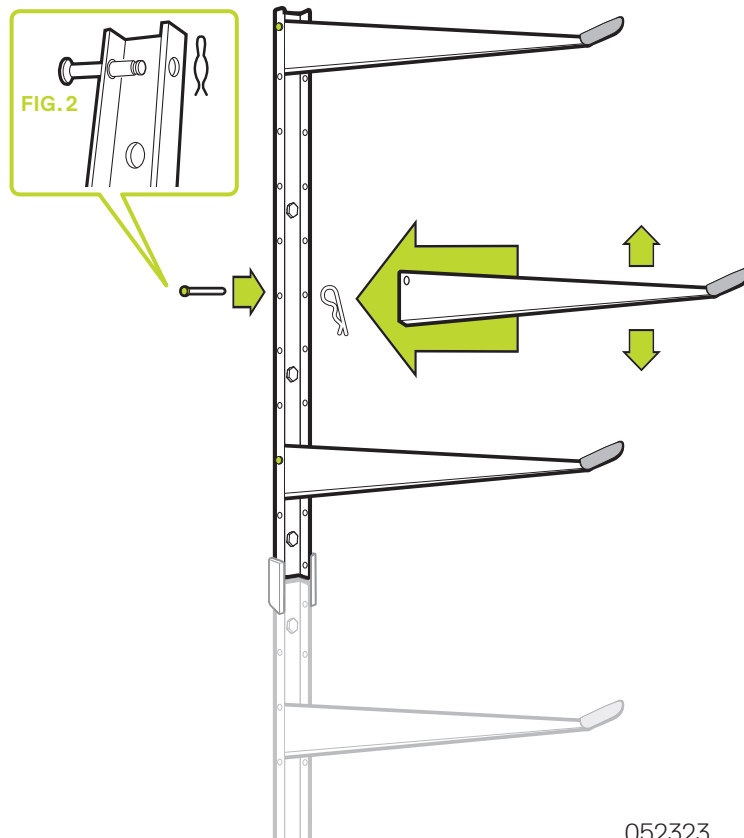

052323



WARNING

Do not allow children to play or hang from Rack. Maximum weight on properly installed rack 480 lbs (218 kg) total, 160 lbs (72.5 kg) per tier with weight evenly distributed.

Service: Please do not return to store; for immediate response email service@designbydelta.com

