


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

1-LIGHT PILLAR LAMP

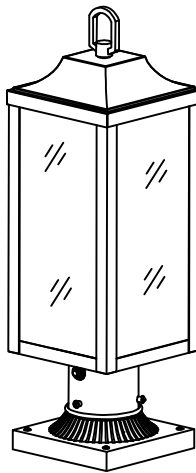

TOOLS REQUIRED




Flathead
Screwdriver



Phillips
Screwdriver



Ladder




Wire Strippers



Pliers



Electrical
Tape



Wire Cutters



Safety Glasses

PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.

PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY
A	Wire nut	3
B	Wooden Screw	4
C	Base	1
D	Anchors	4
E	Screw	3
F	Fixture body	1
G	Center rod	1
H	Top Cover	1
I	Rubber Pad	1
J	Hanging ring	1

INSTALLATION

1. Install the base (C) with four rubber seedlings (D) and four wooden screws (B).
2. Install two maximum 40W B-type light bulbs (not included) onto the lamp holder.
3. First, twist the center rod (G) onto the specific (F) tooth tube of the clamp (as shown in the figure), insert it into the upper cover (H), add waterproof rubber pad (I), and lock it with the lifting ring (J).
4. Connect the grounding wire (green or bare copper wire) of the power supply circuit to the fixed grounding wire, with the black wire connected to (black) and the white wire connected to (white).
5. Insert Fixture body (F) into the base (C) and tighten the three screws (E)

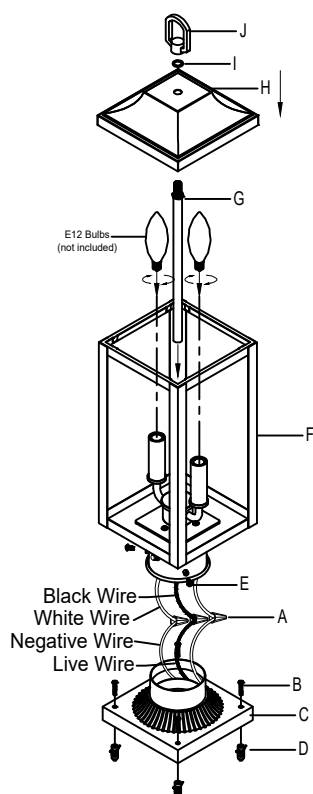

If you have any issues with use this product, please email us. Be sure to include your order number and photos of the issues. This will help us provide you with faster support and solve your problem.