


Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws(P2) in side of top unit the mounting bracket.
6. Fix the Mounting bracket(P1) to the Canopy and tighten by the nut(P5).
7. Fit lampshade(P14,P15,P16) with lampholder ring(P13).
8. Install the bulbs into the lamp fixture.(Bulb not included).

The end!

D17. 3"H12. 6"L3

PARTS LIST

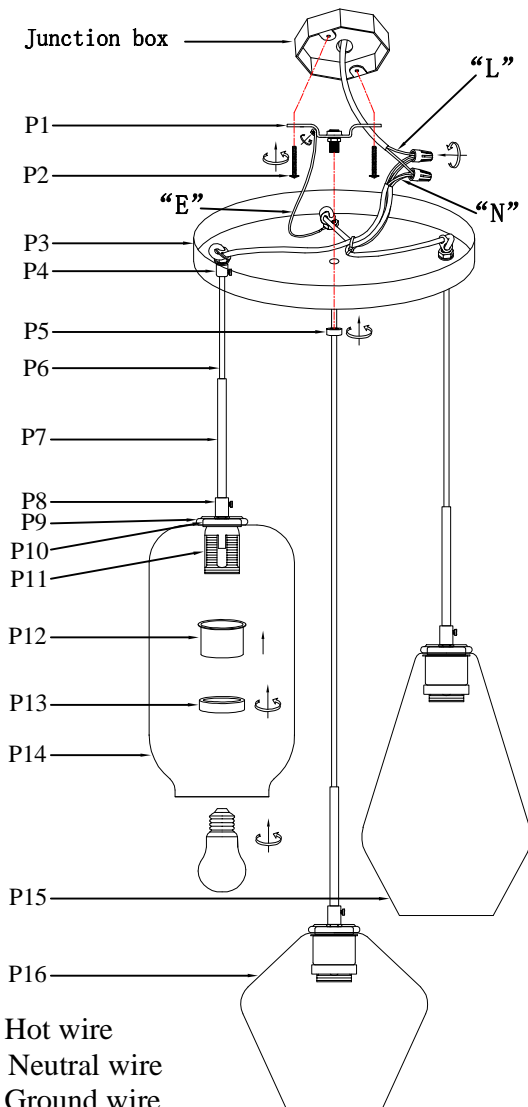

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire

part	picture	Description	Qty	Check list
P1		L4\"/>		
P2		5/32-32 Screw	2	
P3		ø11.8\"/>		
P4		Wire lock	3	
P5		M10 Flat nut	1	
P6		Power Cord 79\"/>		
P7		L5.1\"/>		
P8		Wire lock	3	
P9		ø2.2\"/>		
P10		ø1.6\"/>		
P11		E26 Lampholder	3	
P12		ø2\"/>		
P13		E26 Lampholder Ring	3	
P14		ø6.1\"/>		
P15		ø7.1\"/>		
P16		ø7.9\"/>		