


# ASSEMBLY INSTRUCTION



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 6 - Cand.Bulb

40 Watts Recommended

60 Watts Max

USE LED BULBS FOR EXTENDED USE

This fixture is damp rated



### How to Install

1. Install a bulb in each of the sockets.
2. Attach the crystal ball to the body using the hook at the end of the ball.
3. The canopy of the fixture can be mounted to the ceiling by following instruction Drawing (1).

### Crystal sets

A. 1 piece. (2)10mm+(1)40mm.

### Drawing (1)

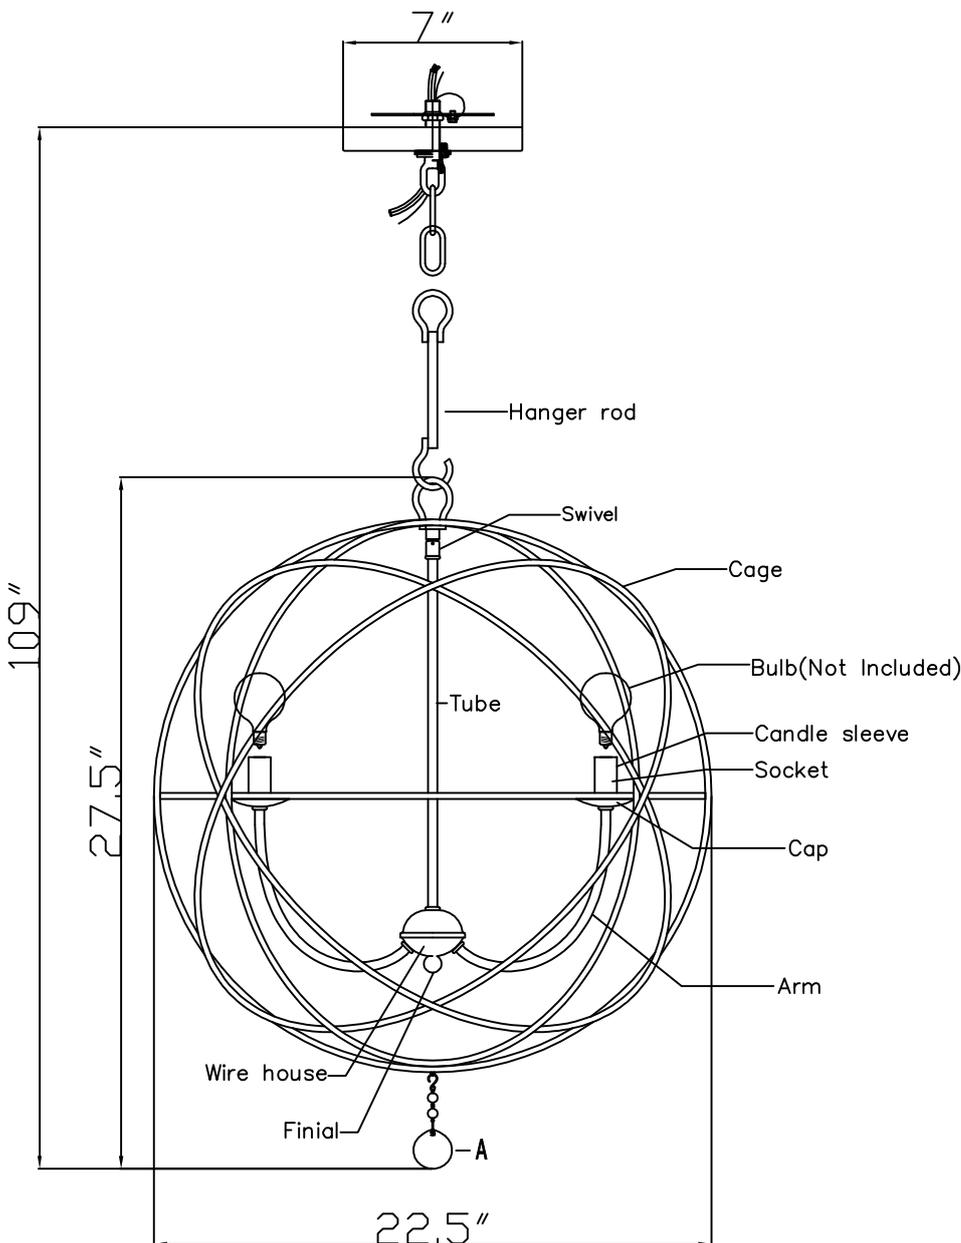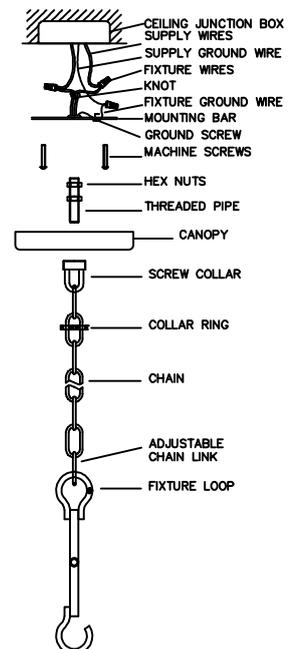


A = (1\*40mm Crystal + 2\*10mm ball) \* 1PC



**WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Outlet box

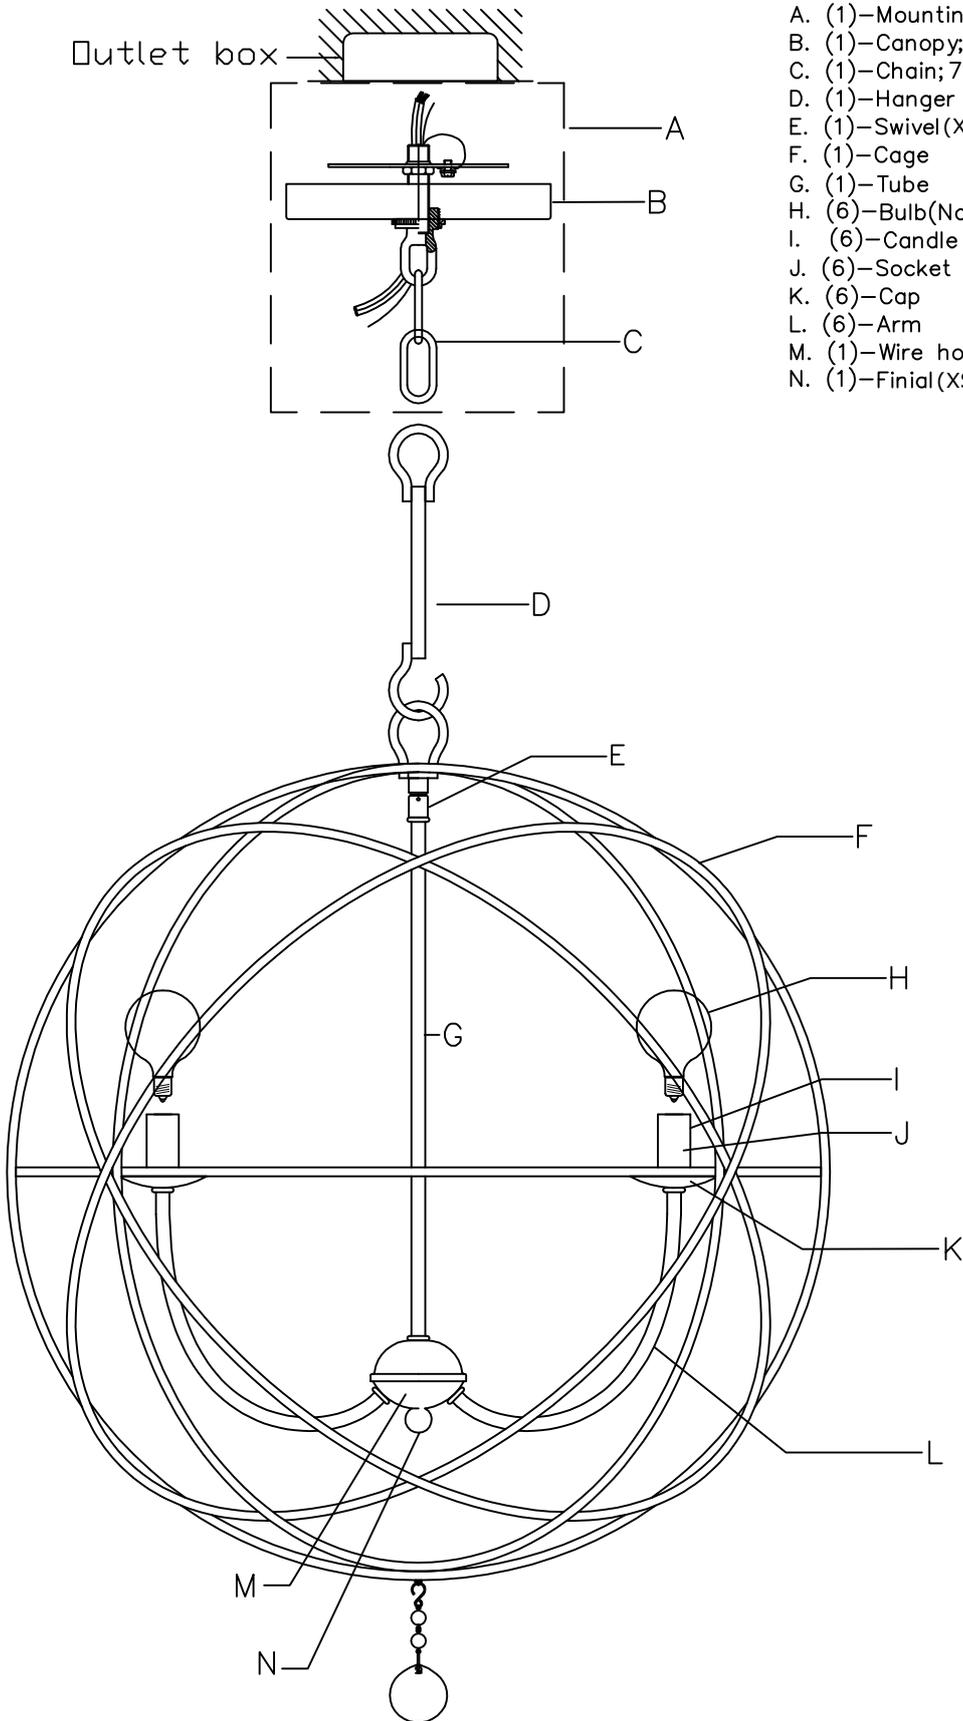

## Part Number

### Part Numbers

- A. (1)—Mounting hardware
- B. (1)—Canopy; W7"XH0.75"(XSU9226EBCAN7IN)
- C. (1)—Chain; 72"; 4.0mm (XSU9224EBCHA4MM)
- D. (1)—Hanger rod; 8"(XSU9224EBROD8IN)
- E. (1)—Swivel(XSU9226EBSWI)
- F. (1)—Cage
- G. (1)—Tube
- H. (6)—Bulb(Not Included)
- I. (6)—Candle sleeve;  $\phi 0.75$ "X2"(XSU9224EBCDL2IN)
- J. (6)—Socket
- K. (6)—Cap
- L. (6)—Arm
- M. (1)—Wire house
- N. (1)—Finial(XSU9226EBFIN)