


Assembly & Installation Instructions

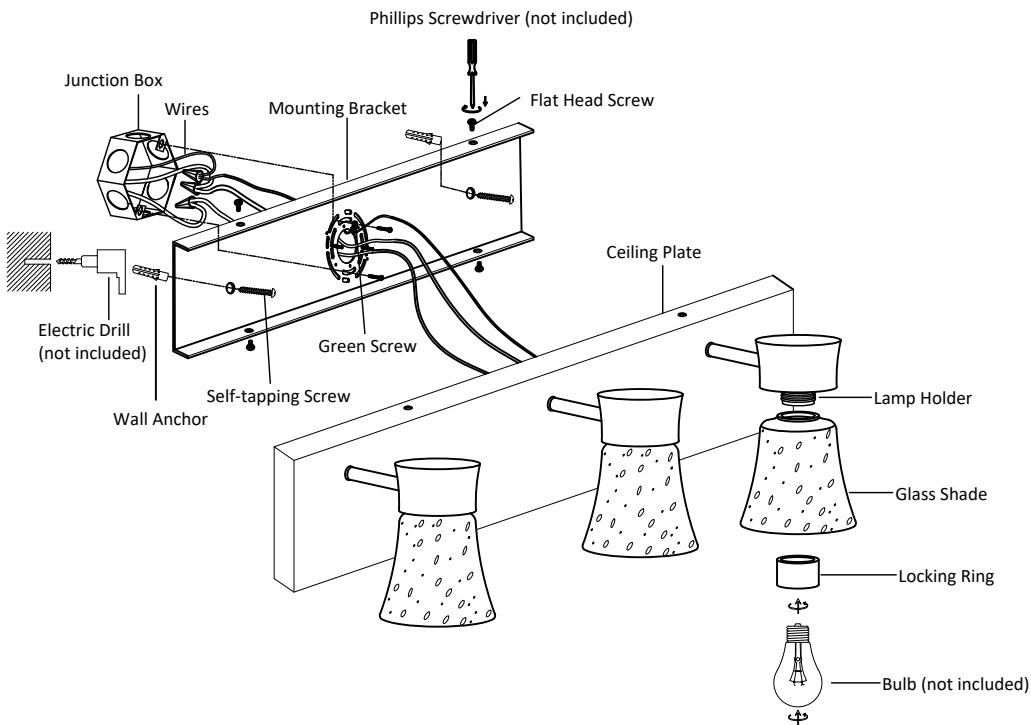

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

A: Place the mounting bracket onto the junction box. Use a pencil to mark the positions of the mounting holes on both sides, then drill holes into the wall with an electric drill. Insert the wall anchors into the holes with a hammer.

B: Pass the flat head screws through the mounting bracket and tighten them onto the junction box. Insert the self-tapping screws through the holes on the mounting bracket and screw them into the wall anchors to further secure the mounting bracket.

C: Use wire connectors to connect the fixture wires to the power supply wires: black to black (hot), white to white (neutral), and green or bare copper to ground. Ensure no bare wires are exposed to prevent electrical shock. Use the green screw to secure the fixture's ground wire together with the main ground wire onto the mounting bracket.

D: Cover the mounting bracket with the ceiling plate, then tighten the flat head screws to fix them in place.

E: Align the hole of the glass shade with the lamp holder. Hold the glass upright, then tighten the locking ring to secure it.

F: Install the bulbs (not included).