






Installation & Assembly

① ② ③		⑤ ⑥	 ⑥ light fixture 1pcs	⑧ ⑨		 X 1PCS  X 1PCS  X 3PCS
④	 lampshade 1pcs	⑦	 hanging tube 1pcs	⑩ ⑪		 X 3PCS  X 3PCS  X 3PCS







1.Remove out the threaded rod ⑤ from light fixture ⑥, let the wire of the fixture ⑥ go through the lampshade ① and threaded rod ⑤, rotate rod ⑤ to install the lampshade ① to the fixture ⑥.

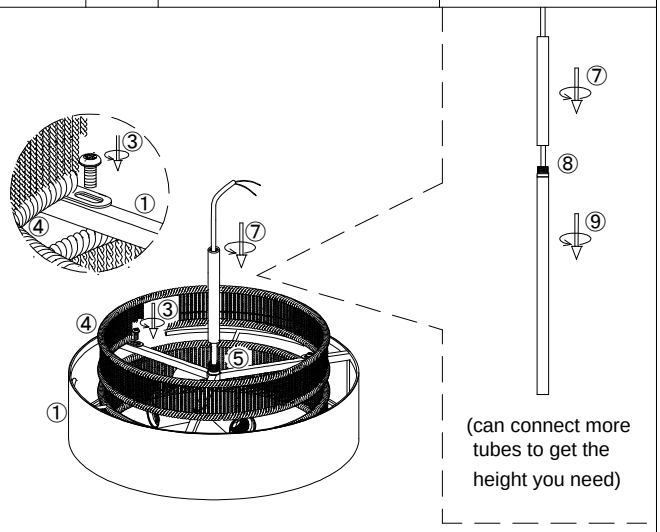

2. Install the lampshade ④ to the fixture with screw ③.(don't tighten the screws ③ until all screws ③ are ready in the holes of lampshade ①, rotate to fasten the screws ③ at last)
3.Let the wire of the fixture go through the tube ⑦, rotate to install the tube ⑦ to the fixture.(can connect more tubes to get the height you need)

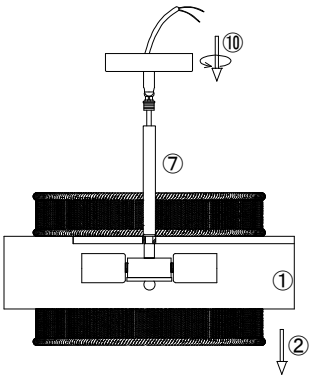




the brackets in the lampshade ① and lampshade ② should be staggered to avoid on the same horixontal ine.

4. Install the canopy ⑩ to the fixture.
5. Pull down the inner lampshade ② from lampshade ①, and adjust it level.



suggest to use G45 pingpong bulb !

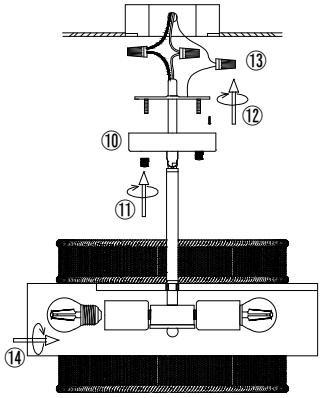

6. Install the bracket to the ceiling junction box with screw ⑫.
7. Connect the wire to your home line with cap connector ⑬.
8. Install the fixture to the bracket with cap nut ⑪.
9. Install the bulb ⑭. (bulbs are not included in the package)

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !