DREAMSIDEA

INSTRUCTION MANUAL



NO:41113


DREAMSIDEA

Tel.+1-562-510-9089

E-mail:support@dreamsidea.com

https://www.dreamsidea.com

EXPLODED VIEW

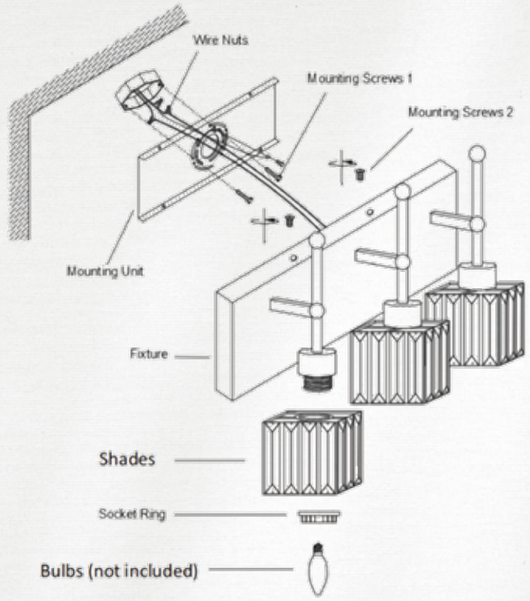

PARTS

A*1 Fixture

B*1 Mounting unit

C*3 Shade

D*3 Socket ring

E*3 Wire nuts

F*2 Mounting screws 1

G*4 Mounting screws 2

TOOLS REQUIRED

Ladder

Safety glasses

Electrical tap

Phillips screwdriver

Flat blade screwdriver

Pliers

Wire strippers

ATTENTION

Please inspect the wires before installation, if the wireshows any cut or abrasion,or has exposed copper wires,

DO NOT use the fixture,it might be caused during transportation or defect product.


Before starting installation of the fixture, please remove the previous fixture (if any).Disconnect the power by turning off the electric break for your property(Please ask for professionalhelp if reeded).

MAINTENANCE AND WARNING

- Verify the lamp model suits the environmentindoor/outdoor, IP rating) and check all accessories(body, screws, cord, manual).
- Only use with bulbs of the recommended type andwattage. Exceeding the maximum wattage maycause overheating or fire.
- Do not install the fixture if any part is damaged or missing.
- The fixture may become hot during use. Allow to cool before handling
- Clean dust accumulation in recessed lamps regularly(to prevent overheating), but only when powered off; never rinse with water.
- If the fixture includes a dimmer switch, ensure it is compatible with the fixture before installation.
- Do not modify the fixture in any way; tampering with electrical components can result in malfunction or risk of fire


STEP 1

Unscrew the ball nust from the mountinig unit,
Use the mounting screws to attach the mounting unit to the junction box.

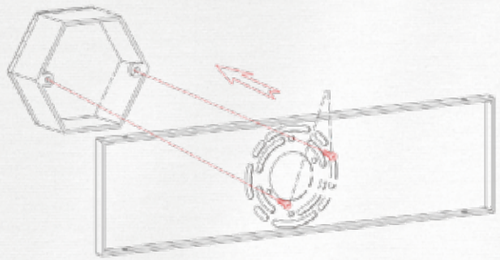


STEP 2

Make the electrical connection from the junction box (not included) to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied wire nuts. Secure with electrical tape.

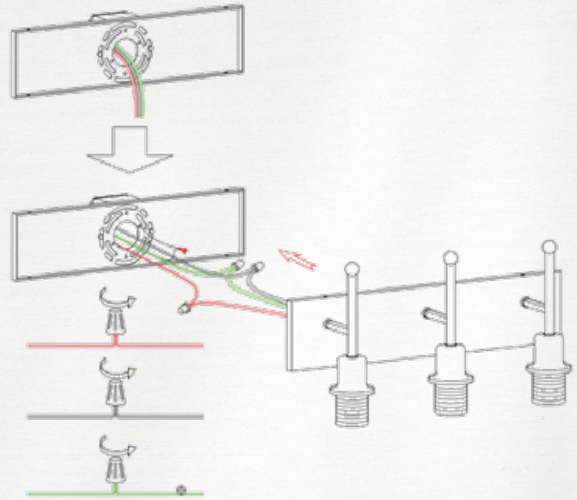


STEP 3

Align the fixture body with the mounting unit and twist the screws on top to lock.

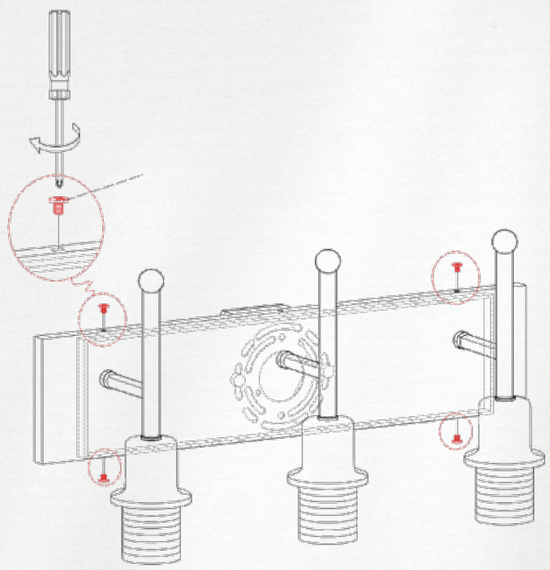


STEP 4

Twist the light socket (D) onto the body (E) as shown.

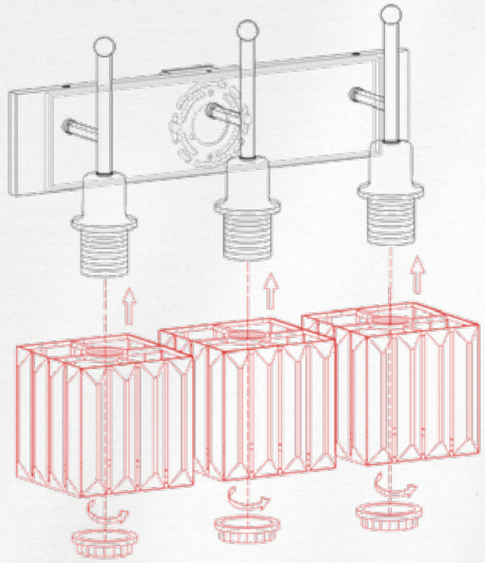


STEP 5

Install the light bulbs into each light socket.

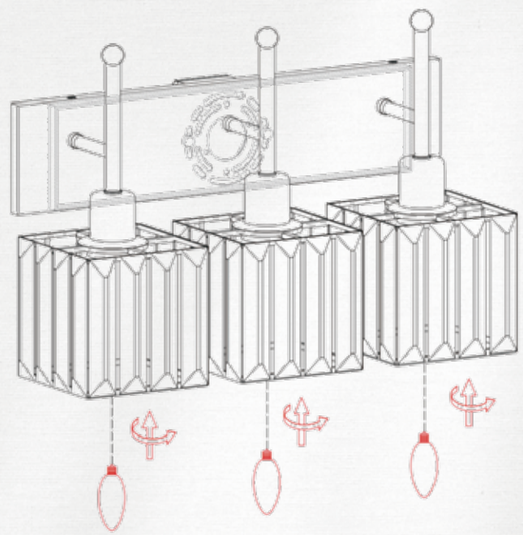

STEP 6

If the lamp shade is tilted, you can simply adjust the position by holding the lamp holder as shown, and gently move the lampholder to make it upstraight.

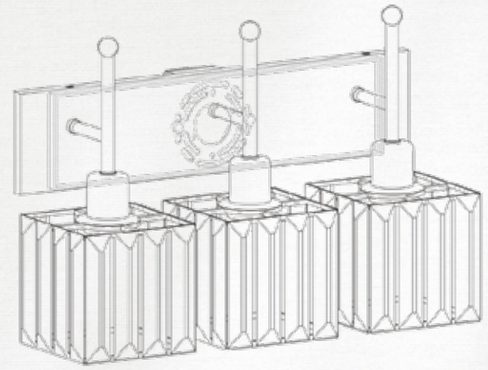

PRODUCT OVERVIEW



41113BK



41113SR