


# 7.7-普莱德-178说明书-163x290mm 120克铜板折页说明书 4折页-1460张

**BabyVista**

**BISON XT**  
CargoLite Stroller

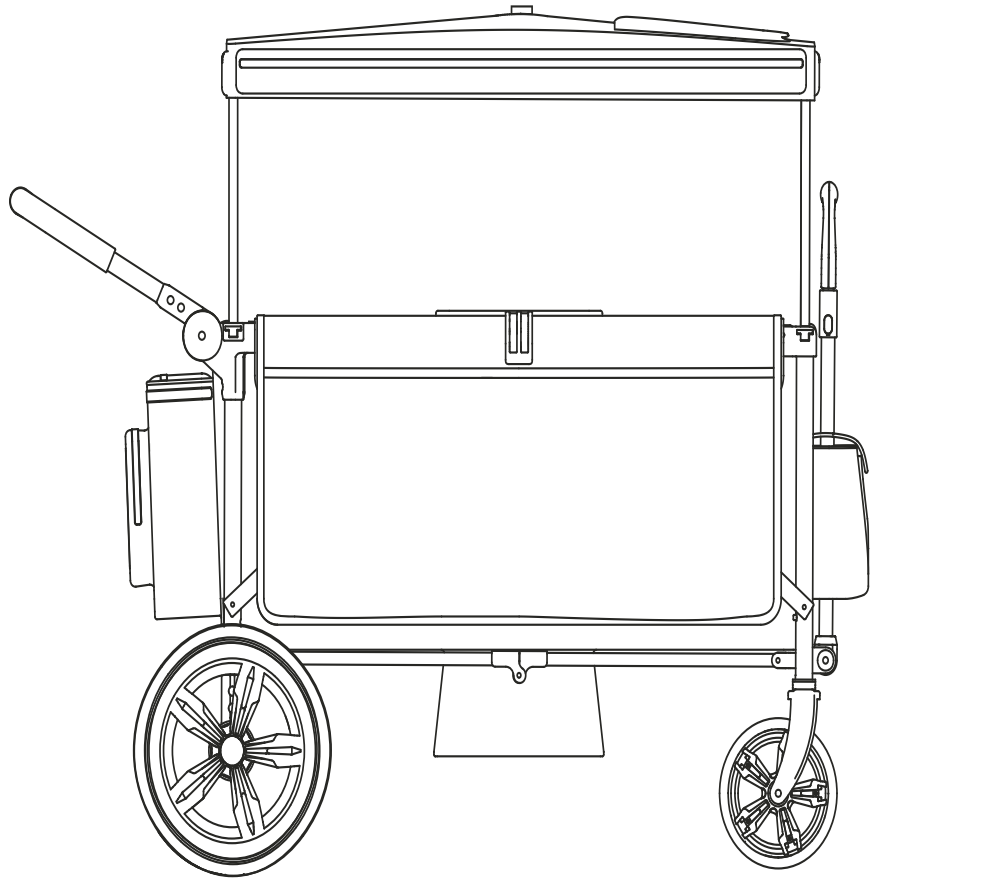

**WARNING**

Failure to follow these instructions could result in serious injury or death. Please follow all of these instructions to ensure the safety of your child. Keep these instructions for future reference.

6-36 M	For 6-36m+ infants
≤50 LBS	Max weight 300 lbs (136kg)

**SAFETY PRINCIPLE**

**WARNING:**

- Avoid serious injury from falling or sliding out. Always use seat belt.
- Never leave children unattended.
- Take care when folding and unfolding the stroller to prevent finger entrapment.
- If the recline angle between the seat and the backrest is less than 150 degrees, the stroller is not suitable for babies less than 6 months old.
- Keep the stroller away from open flames or sources of heat.
- Do not allow children near the stroller while unfolding it.
- Always engage the brakes when the stroller is not being pushed to prevent it from rolling away. NEVER leave the stroller unattended on a hill or incline, as it may slide down.
- STRANGULATION HAZARD:** A child can strangle in a loose safety harness. Never leave a child in the seat when the safety harness is loose or undone.
- The maximum weight capacity for the stroller and storage basket combined is 50 lbs (22 kg). Exceeding this weight limit can result in excessive wear and stress on the stroller, potentially causing a hazardous, unstable condition.

**NEVER:**

- Do not use the stroller on stairways or escalators.
- Do not use the stroller with roller skates, in-line skates, skateboards, or bicycles.
- Do not allow your stroller to be used as a toy.
- Discontinue use of the stroller if it malfunctions or becomes damaged.

**IMPORTANT:**

- To ensure the safe operation of your product, please follow these instructions carefully and keep them for future reference.
- Before assembly and each use, inspect this product for damaged hardware, loose joints, missing parts, or sharp edges. NEVER use it if any parts are missing or broken.
- Adult assembly is required.

**CAUTION:**

- This stroller wagon is designed for one child per seat. Using it with more than two children (or reach 200 lbs) may result in an unbalanced condition that can harm your child.
- Please note that placing parcels, accessory items, or both on the stroller may cause the unit to become unstable.
- The maximum weight limit for the storage basket is 4.4 lbs (2 kg). Exceeding this weight limit may lead to a hazardous, unstable condition.
- Ensure the stroller is fully unfolded and securely locked in place before allowing a child near it.

**CLEANING:**

- To clean, use only mild household soap or detergent and warm water on a sponge or clean cloth.

**WARNING DO NOT:**

- Place any items on the canopy! May cause canopy damage or vehicle tipping, leading to injury. Always keep the canopy clear. Use only for shade and weather protection.

**WARNING NO:**


- Jumping, playing, or climbing on the seat! Risk of falling, tipping, or serious injury. Always supervise children and ensure proper seated position.

**WARNING:**


- Wheel can detach and cause tip-over! Pull on the wheel to assure it is securely attached.

01


**PARTIAL PARTS**

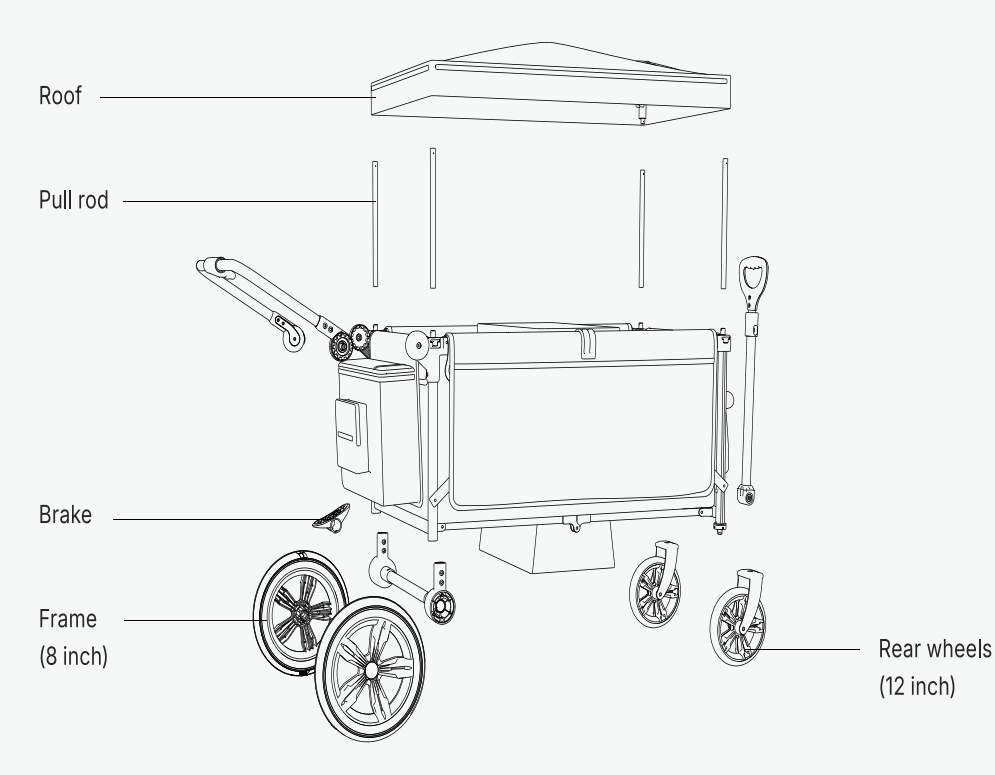

**INSTALLATION**

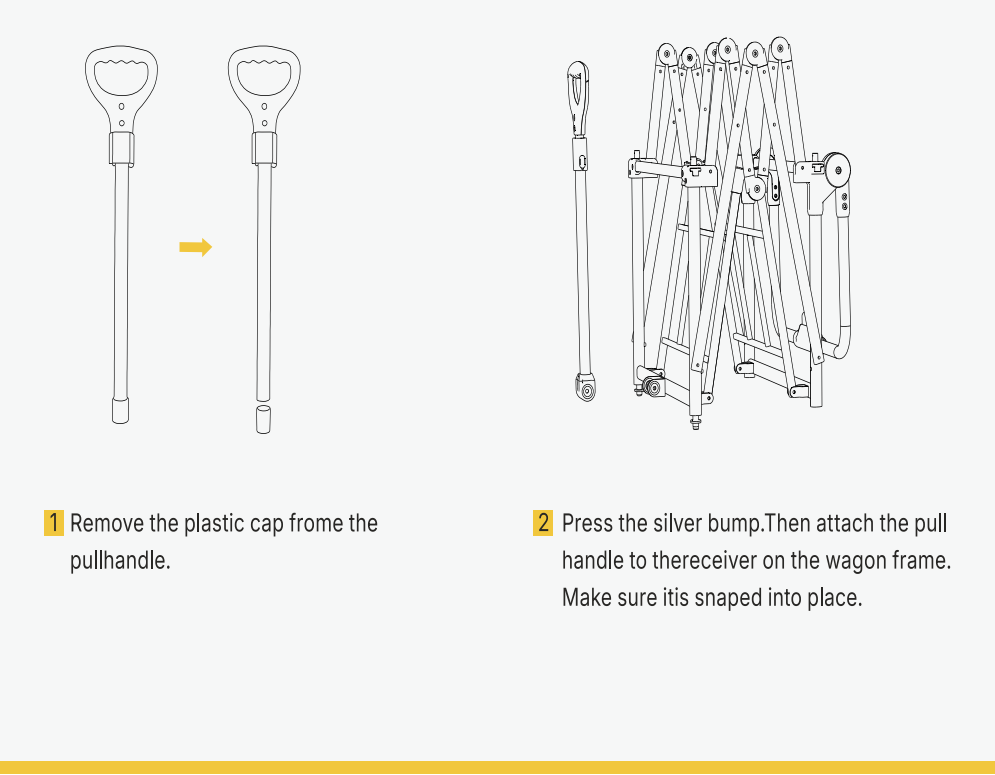


1 Remove the plastic cap from the pull handle.

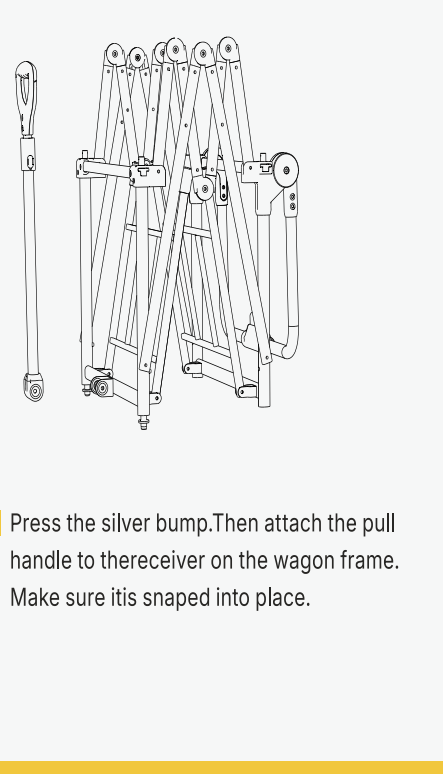


2 Press the silver bump. Then attach the pull handle to the receiver on the wagon frame. Make sure it's snapped into place.

02

**INSTALLATION**

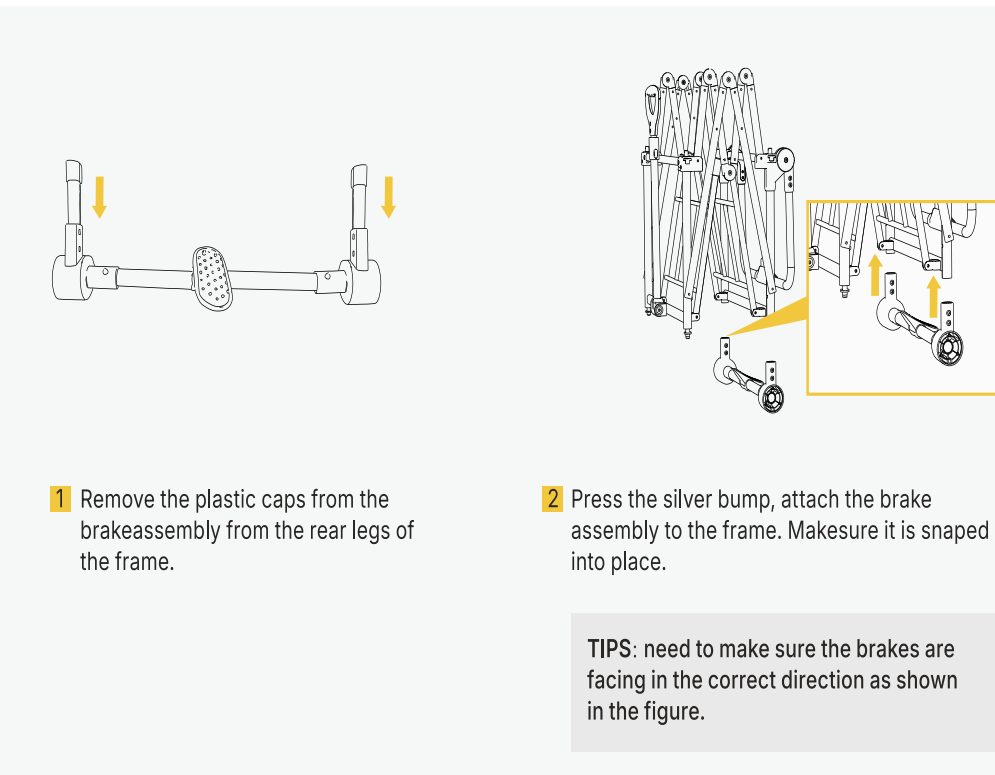


1 Remove the plastic caps from the brake assembly from the rear legs of the frame.

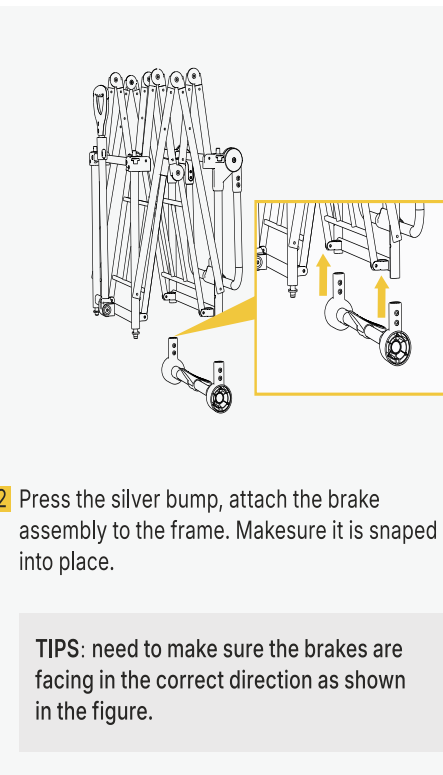


2 Press the silver bump, attach the brake assembly to the frame. Make sure it is snapped into place.

**TIPS:** need to make sure the brakes are facing in the correct direction as shown in the figure.

**INSTALLATION**

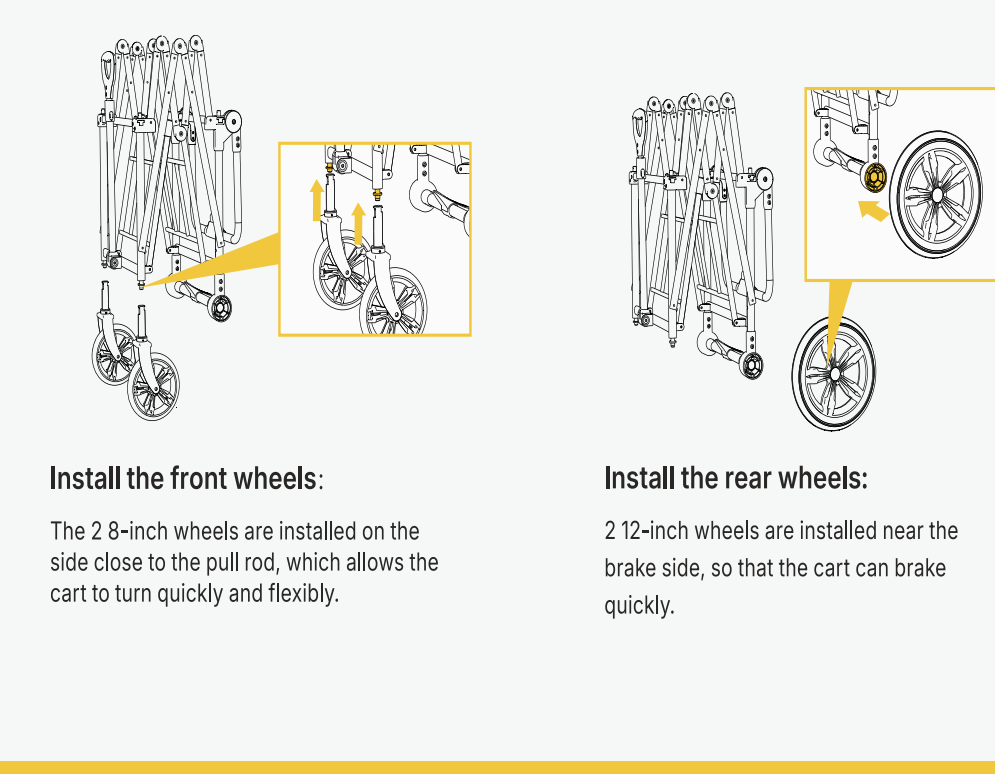


**Install the front wheels:**  
The 2 8-inch wheels are installed on the side close to the pull rod, which allows the cart to turn quickly and flexibly.

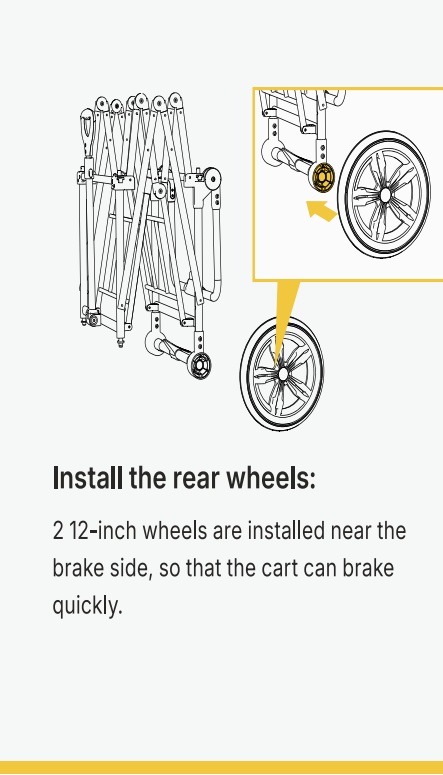

**Install the rear wheels:**  
2 12-inch wheels are installed near the brake side, so that the cart can brake quickly.

03


**INSTALLATION**

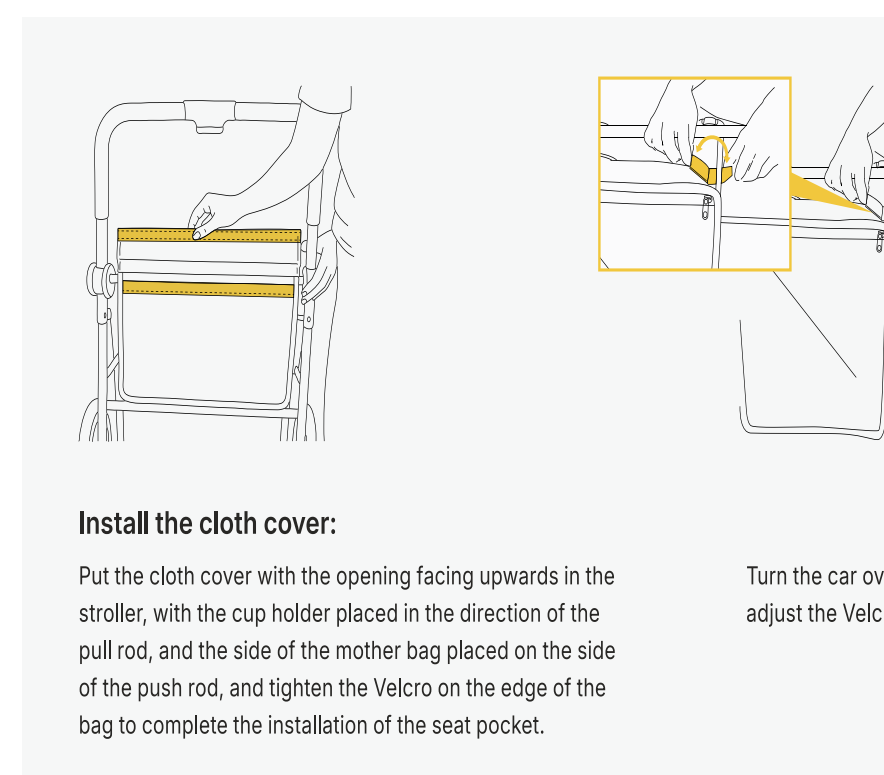

**Install the cloth cover:**  
Put the cloth cover with the opening facing upwards in the stroller, with the cup holder placed in the direction of the pull rod, and the side of the mother bag placed on the side of the push rod, and tighten the Velcro on the edge of the bag to complete the installation of the seat pocket.

Turn the car over and adjust the Velcro.

**FEATURE**




**Install the ceiling:**  
First, push the buttons to push out the support rods around the cart, then open the ceiling and align it with each small hole. The ceiling is installed.


04

**INSTALLATION**

**How to open the stroller ?**

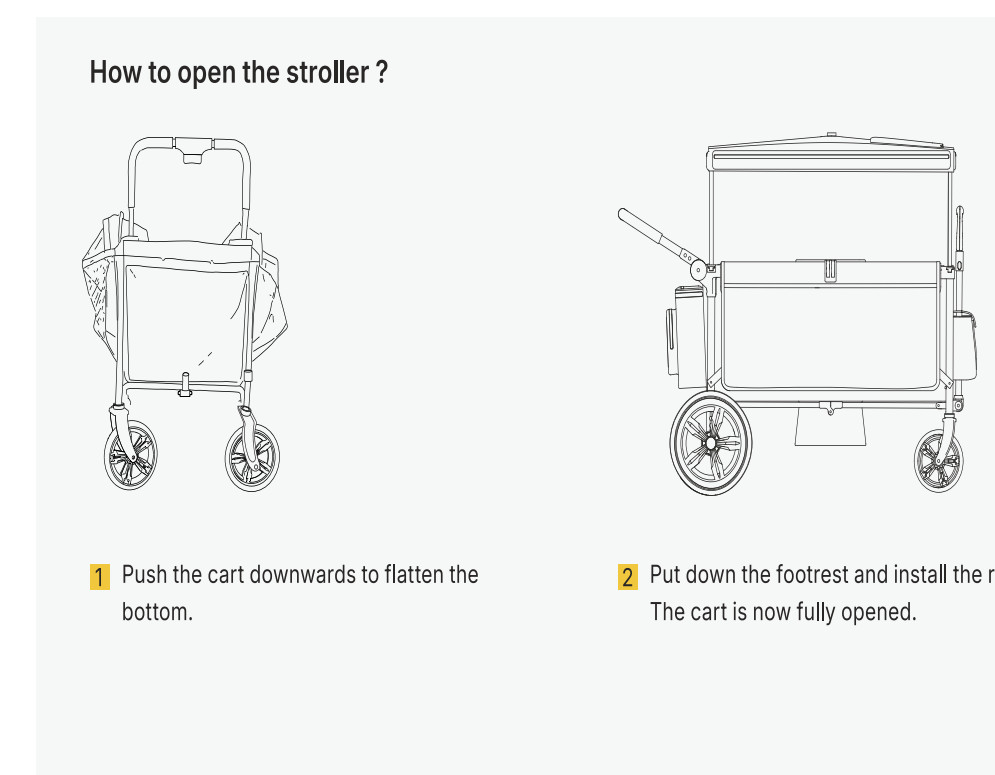


1 Push the cart downwards to flatten the bottom.

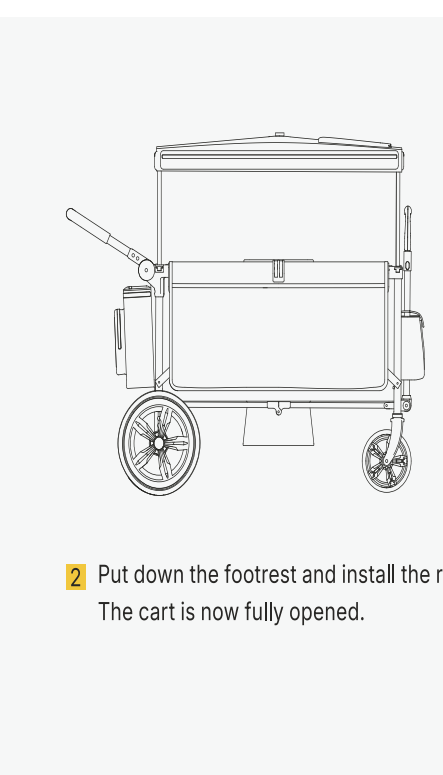

2 Put down the footrest and install the roof. The cart is now fully opened.

**FEATURE**

**How to close the stroller ?**

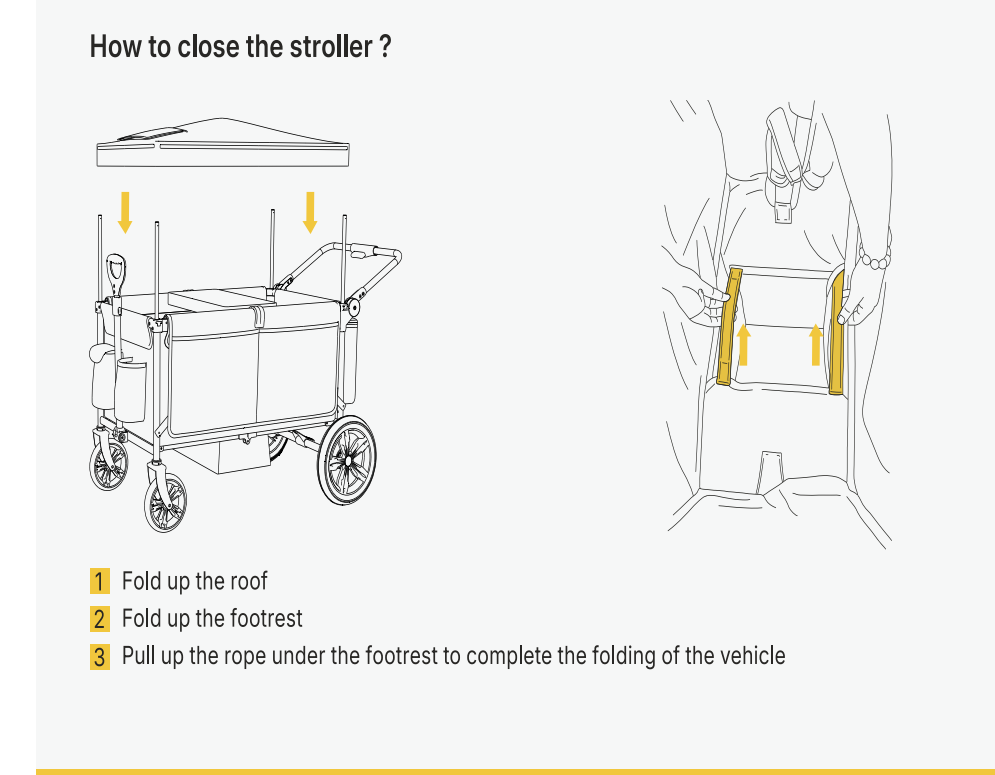

1 Fold up the roof


2 Fold up the footrest

3 Pull up the rope under the footrest to complete the folding of the vehicle

05

**FEATURE**

**How to brake and release the brakes ?**

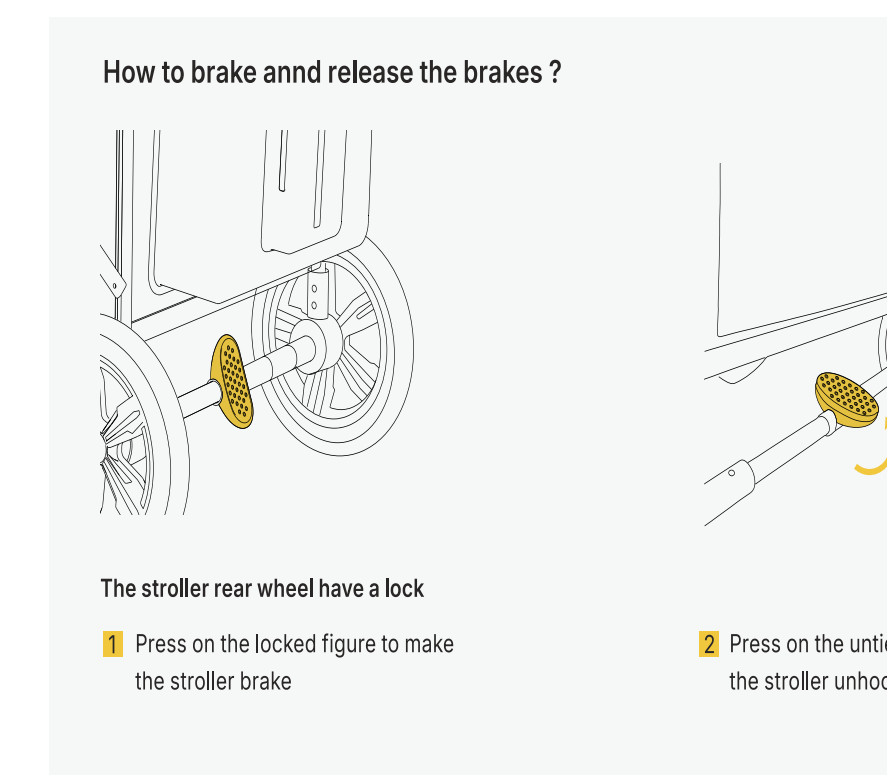


The stroller rear wheel have a lock

1 Press on the locked figure to make the stroller brake

2 Press on the untied figure to let the stroller unhook the brakes

**FEATURE**

**How to adjust the stroller harness operation :**

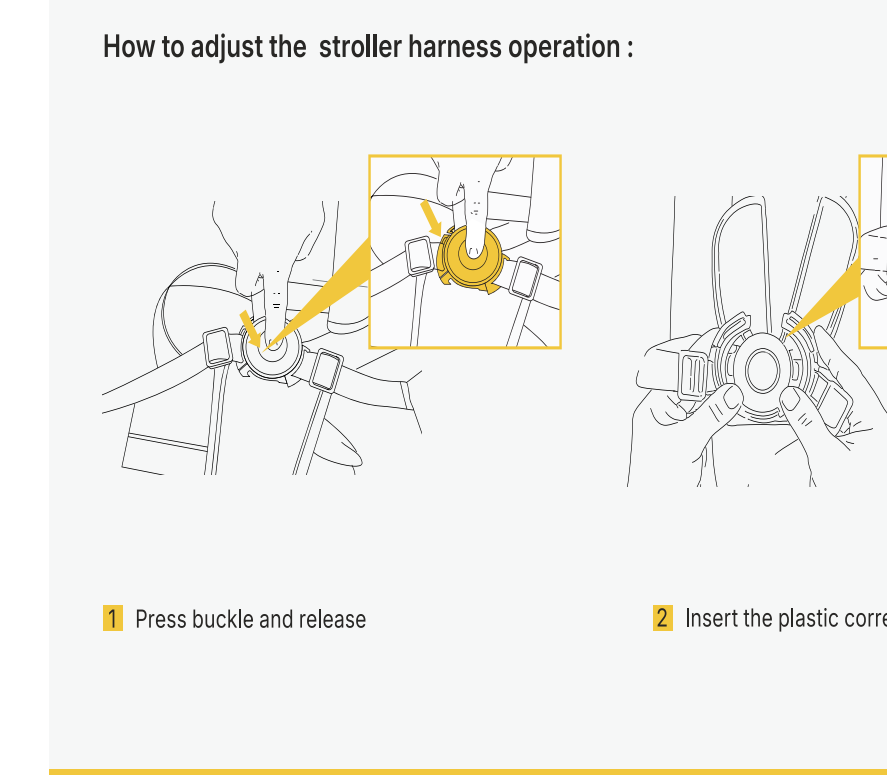

1 Press buckle and release

2 Insert the plastic correctly

06

