


ASSEMBLY INSTRUCTION



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

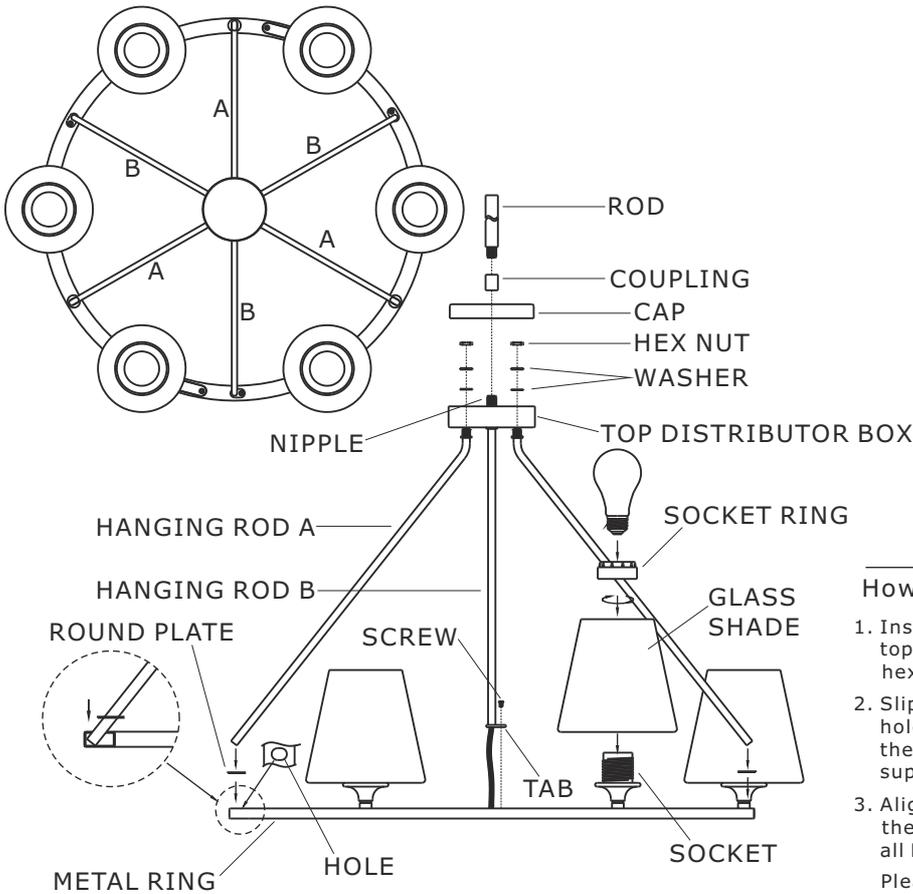


You will need 6-Medium Base Bulb  
 60 Watts Recommended 100 Watts Max.  
 USE LED BULBS FOR EXTENDED USE  
 The fixture is Damp rated

How to install

1. Install the hanging rod A and B alternately onto the top distributor box. Secure them with the washer and hex nut using a wrench. (Space the rods apart equally)
2. Slip the round plate over the metal ring, covering the hole on the ring. Insert the hanging rod A into the hole on the metal ring. Repeat for all Rod A's. (The round plate is supposed to cover the hole on the ring)
3. Align the hole on the tab on hanging rod B with the hole on the metal ring. Secure in place using a screw. Repeat for all Rod B's.

Please make sure that all hang rods are straight after installation step #2 and #3, to ensure that fixture will hang straight.

4. Slip the cap over the nipple on the top distributor box, and secure with the coupling.
5. Determine the preferred hanging height and adjust the required rods.
6. Feed the wires through the rods and connect them together.
7. Slip collar ring and canopy over the rod assembly.
8. Slip mounting plate with swivel along wire and thread it into the top of the rod assembly.
9. Raise fixture up and attach mounting plate to the outlet box using two outlet box screws.
10. Slide canopy up along rods and over mounting plate with swivel and hold in position. Slide collar ring up to canopy and thread onto the screw collar, to secure canopy.
11. Install the glass shade over the socket, and secure with the socket ring.
12. Install the bulb(not included) into the socket.

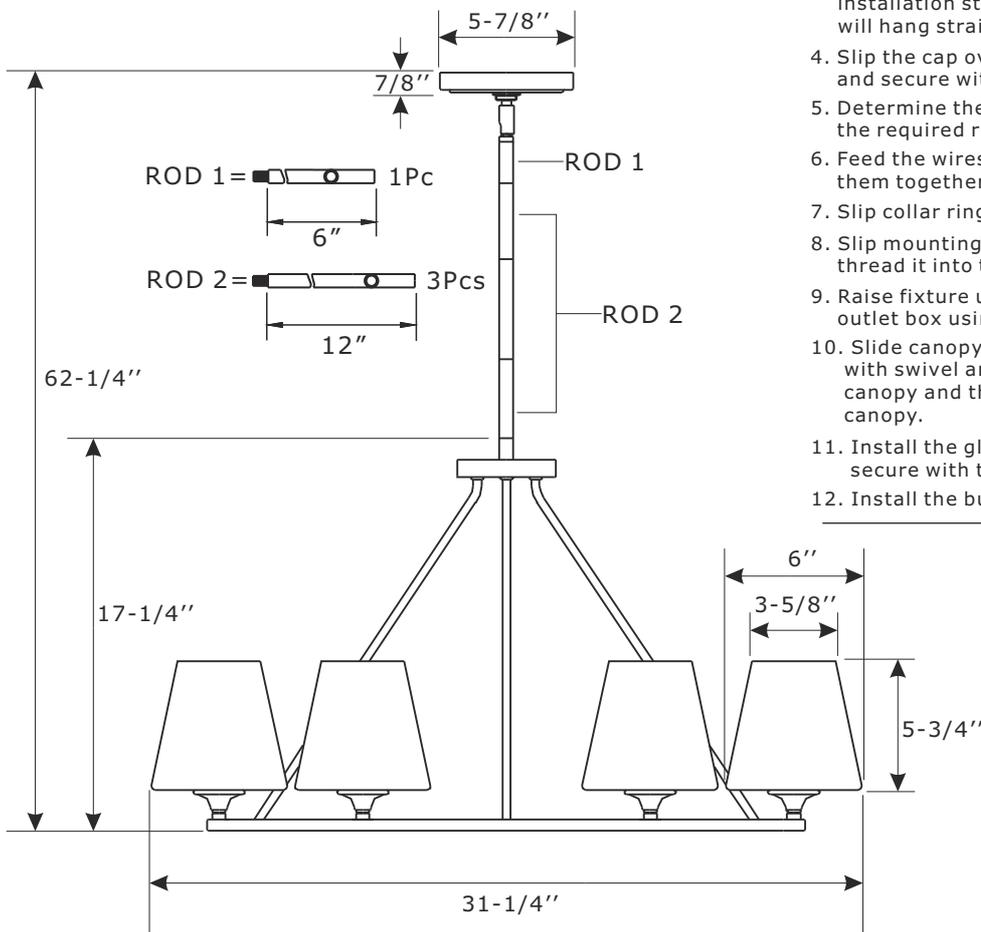

**WARNING:** This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm.

ASSEMBLY INSTRUCTION

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W5-7/8"xH7/8" #XRF3004BFCAN5.875IN
- C. (1)-Collar ring
- D. (1)-Rod D5/8"xL6" #XRF3004BFROD6IN
- E. (3)-Rod D5/8"xL12" #XRF3004BFROD12IN
- F. (1)-Coupling
- G. (1)-Cap
- H. (1)-Top distributor box
- I. (3)-Hanging rod A
- J. (3)-Hanging rod B
- K. (3)-Screw
- L. (6)-Socket
- M. (6)-Glass shade #XRF3004SHA6IN
- N. (6)-Socket ring

