




Assembly Instructions

CM4813E

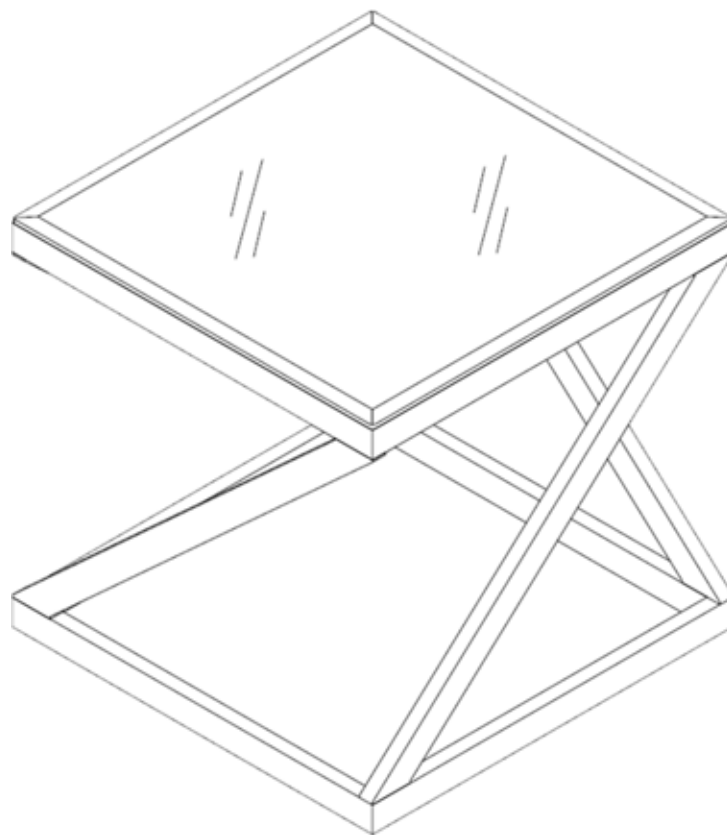

ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For some products, two persons are recommended.

EASY  DIFFICULT

Tools Required for Assembly:


Allen Wrench




ASSEMBLY & CARE ADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY.
PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.

BASIC ASSEMBLY TECHNIQUES

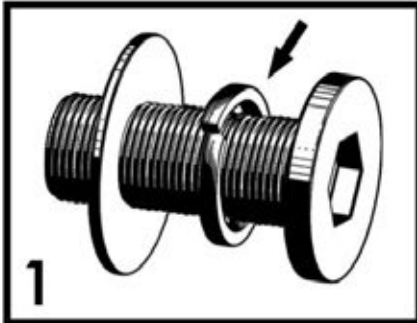


When lock or spring washer is used in an assembly, please make sure the lock or spring washer is placed between the larger flat washer and the head of the screw or bolt.

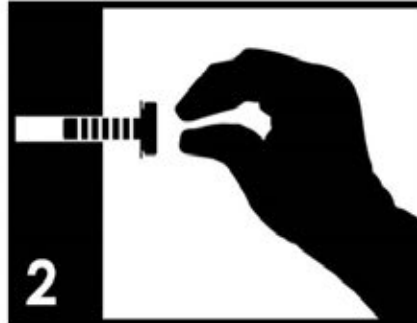


Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.




Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.

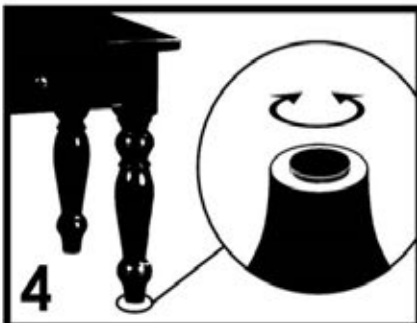

Some furniture comes with height adjustment knobs underneath each leg. To lower or to raise each leg, you need to turn clockwise or counterclockwise, respectively.

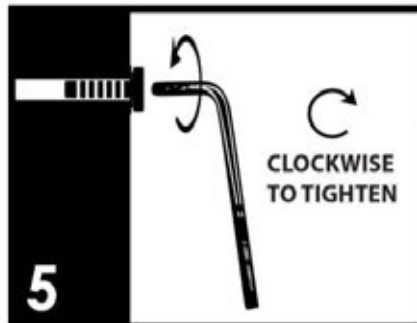

Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.

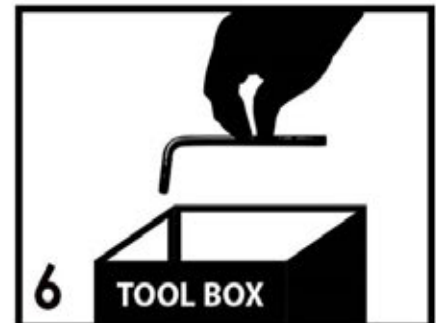

Save the instructions and store the Allen wrench or any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.



FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY
RESULT IN INJURY AND/OR PROPERTY DAMAGE.




Before you begin, please read Page 2 of “Assembly and Care Advice”.

And remember, do not tighten until each step is completed or instructed.


MD

Parts List

	#1 x 1 pc Glass Top
	#2 x 1 pc Top Frame
	#3 x 1 pc Bottom Frame
	#4 x 4 pcs Table Support

Hardware List



	#A x 16 pcs M6x50
	#B x 1 pc Allen Wrench
	#C x 4 pcs Glide
	#D x 4 pcs Spacer

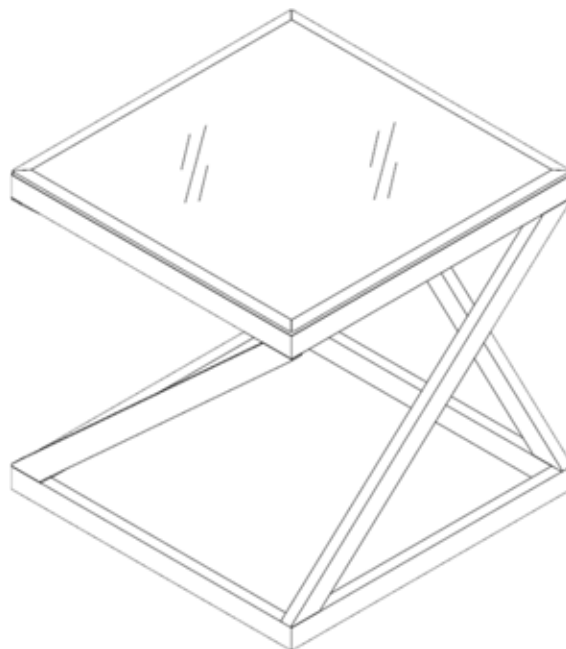



Align the threaded end of the glides (#C) with the pre-drilled holes on the bottom frame (#3) and tighten by hand until secured.

#C x 4 pcs

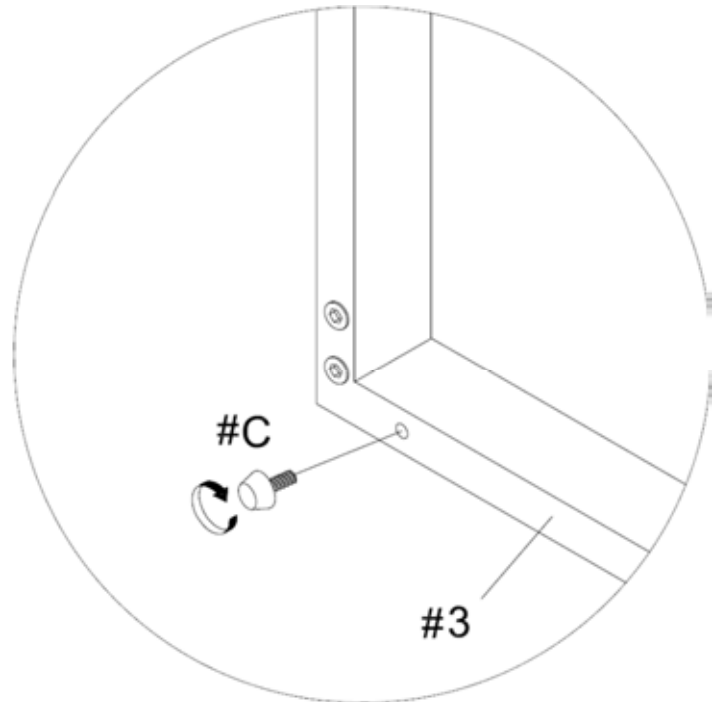
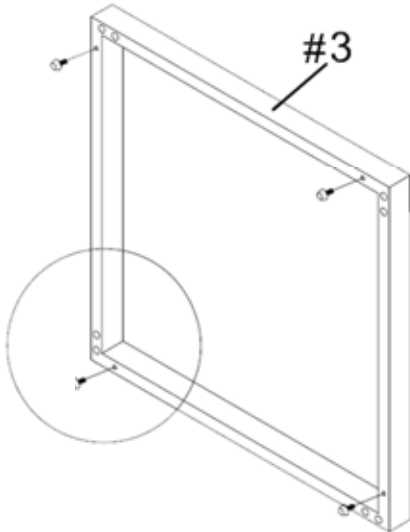


Turn right (clockwise) to tighten



- I. Align the table supports (#4) with the pre-drilled holes on the bottom frame (#3).
- II. Insert 8 bolts (#A) into the bottom frame (#3) and secure those bolts using the Allen wrench (#B) to lock them in with the table supports (#4).
- III. Align the top frame (#2) with the pre-drilled holes on the assembled table supports (#4).
- IV. Insert 8 bolts (#A) into the top frame (#2) and secure those bolts using the Allen wrench (#B) to lock them in with the table supports (#4).

#A x 16 pcs

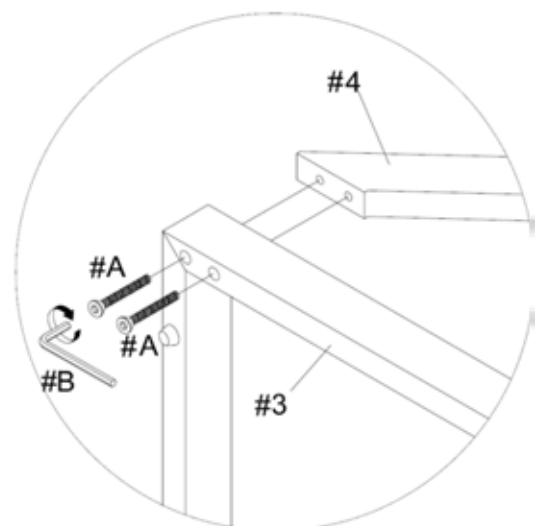
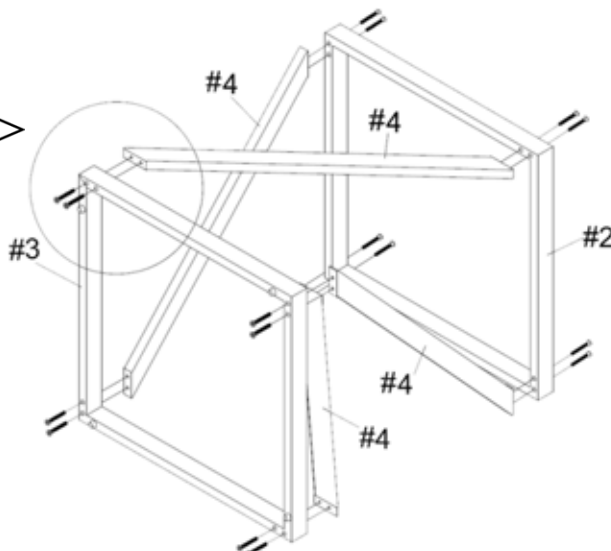


Turn right (clockwise) to tighten




Place 4 spacers (#D) onto the top frame (#2) as shown below.

#D x 4 pcs

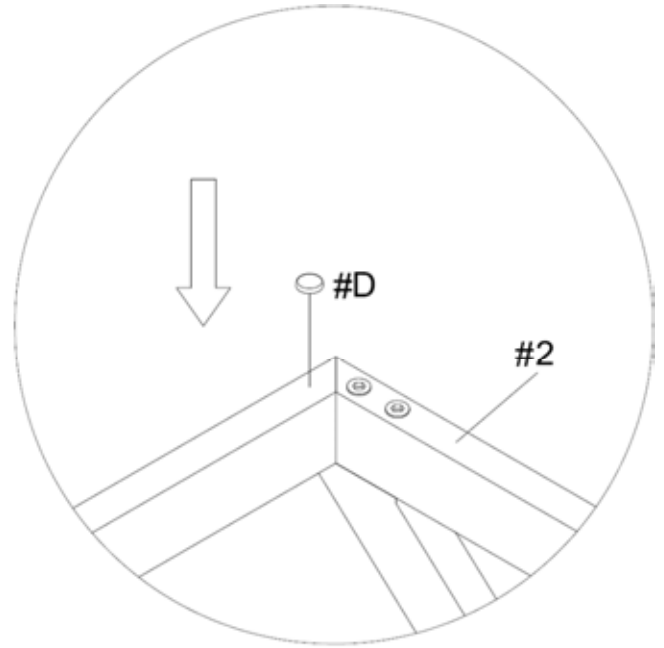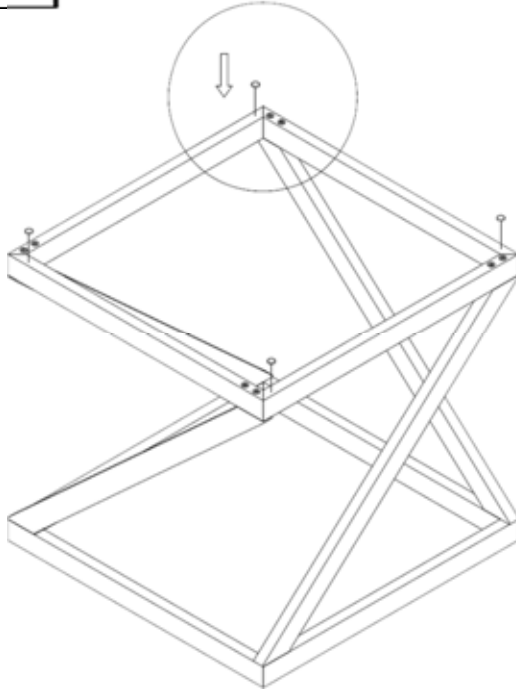

Carefully place the glass top (#1) over the spacers (#D). Make sure the table is rested on a flat surface and it does not feel loose or wobbly. If it does, double check that the bolts are secured and properly tighten. If needed, adjust the glides according to the ground level.

Adjust the glide (#C) according to the ground level. To lower or to raise, you need to turn the glide (#C) clockwise or counterclockwise, respectively.

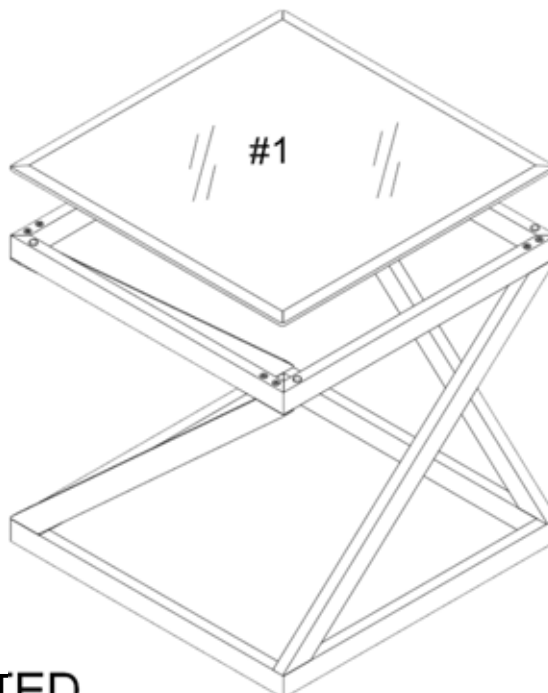

ASSEMBLY IS COMPLETED