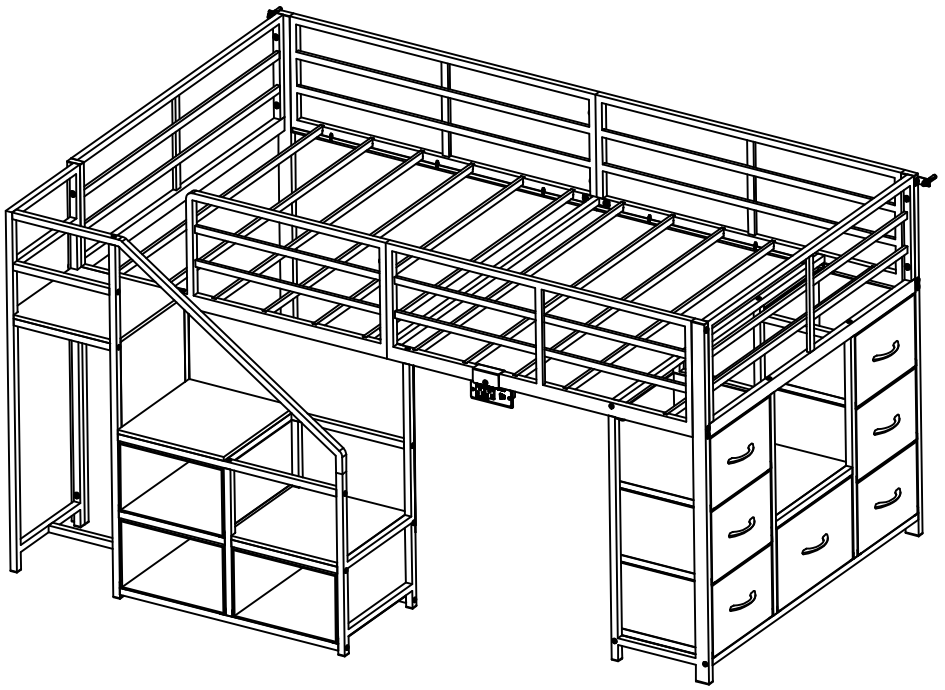





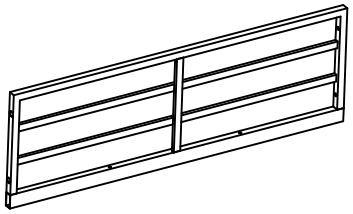
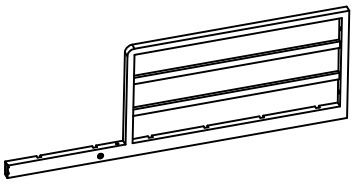
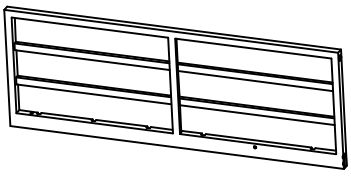











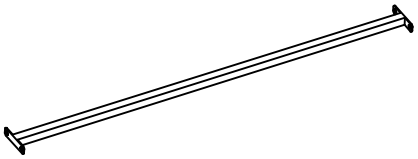




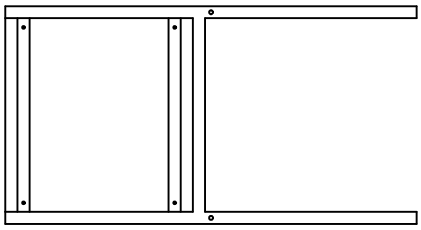

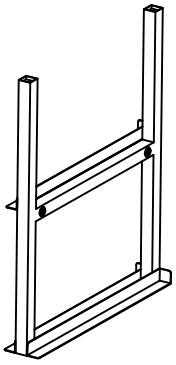
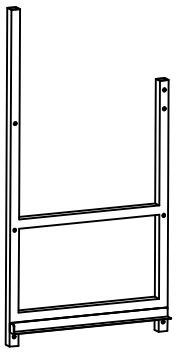



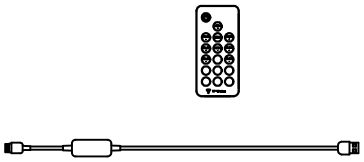










Owner Manual

Parts List:

A 1pcs 	B 1pcs 	C 1pcs 
D 1pcs 	E 1pcs 	F 1pcs 
G 1pcs 	H 1pcs 	I 1pcs 
J 1pcs 	K 11pcs	L 1pcs 
M 1pcs 	N 3pcs 	O 6pcs 


P 1pcs 	Q 7pcs 	R 2pcs 
S 1pcs 	T 1pcs 	U 2pcs 
V 3pcs 	W 2pcs 	X 2pcs 
Y 1pcs 	Z 1pcs 	A1 1pcs 
B1 1pcs 	C1 1pcs 	D1 1pcs 

E1 1pcs 	F1 1pcs 	G1 1pcs 
H1 1pcs 	I1 1pcs 	J1 1pcs 
K1 1pcs 	L1 1pcs 	M1 1pcs 
N1 1pcs 	O1 5pcs 	P1 2pcs  M8x60mm
Q1 1pcs 	R1 1pcs 	S1 7pcs  M3*10mm


T1 14pcs  M4*12mm	U1 10pcs  M8*10mm	V1 4pcs  M8*15mm
W1 15pcs  M8*35mm	X1 11pcs  M8*55mm	Y1 3pcs  M6*10mm
Z1 41pcs  M6*35mm	A2 4pcs  M6*55mm	

ASSEMBLY

STEP 1

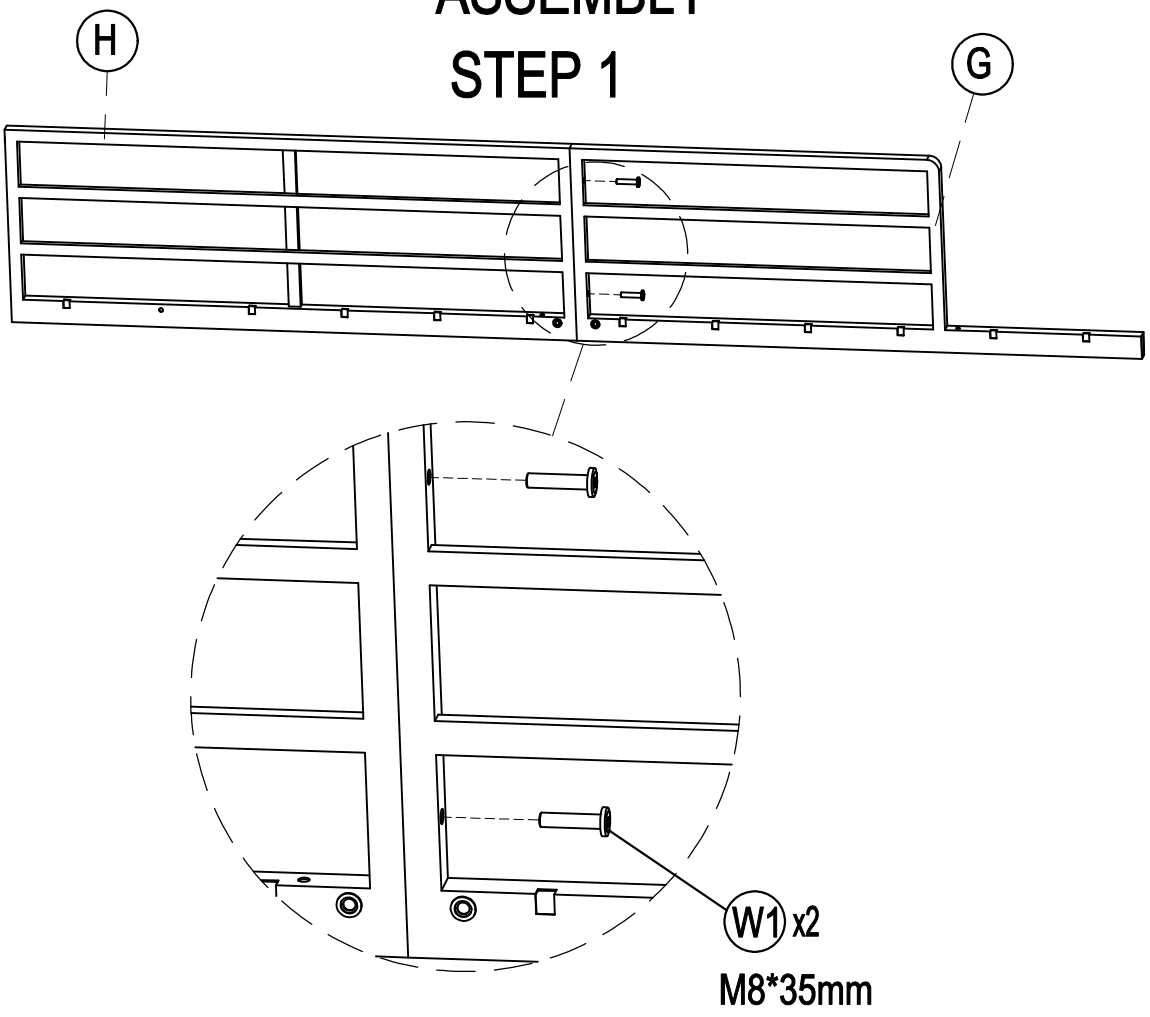


STEP 2

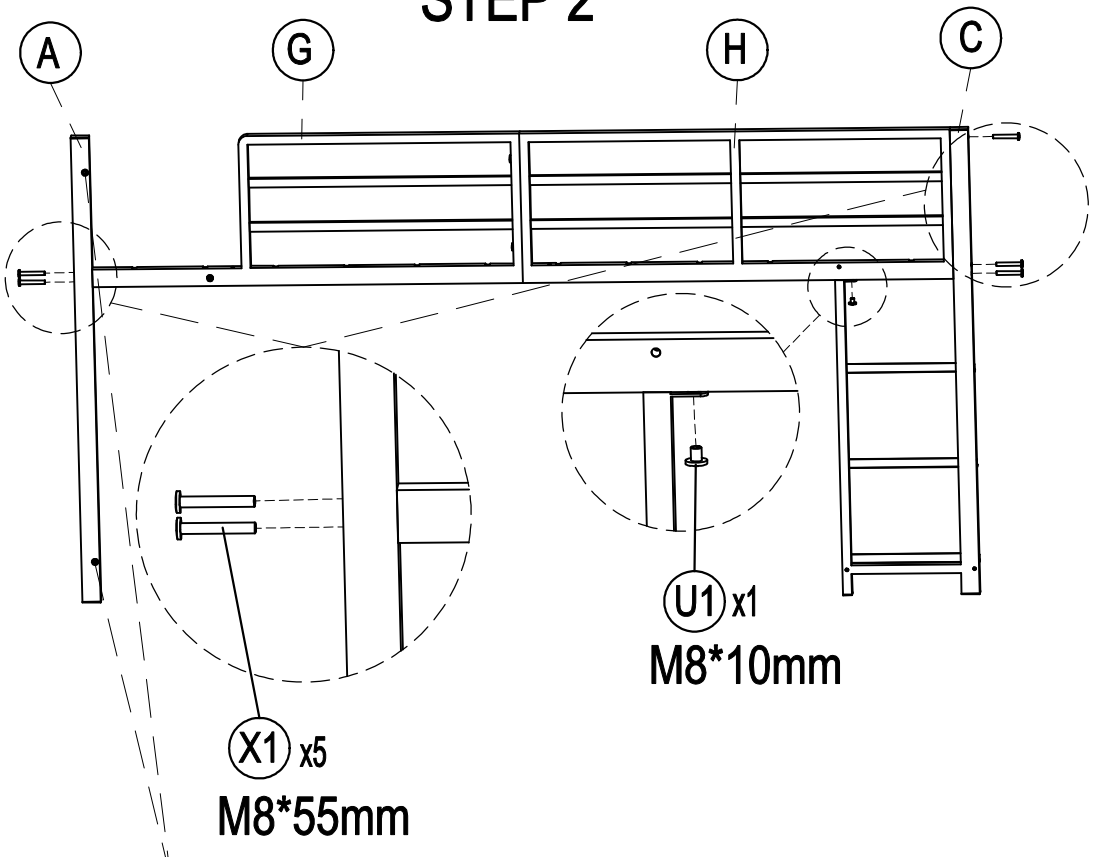


Place them as shown in the diagram.

STEP 3

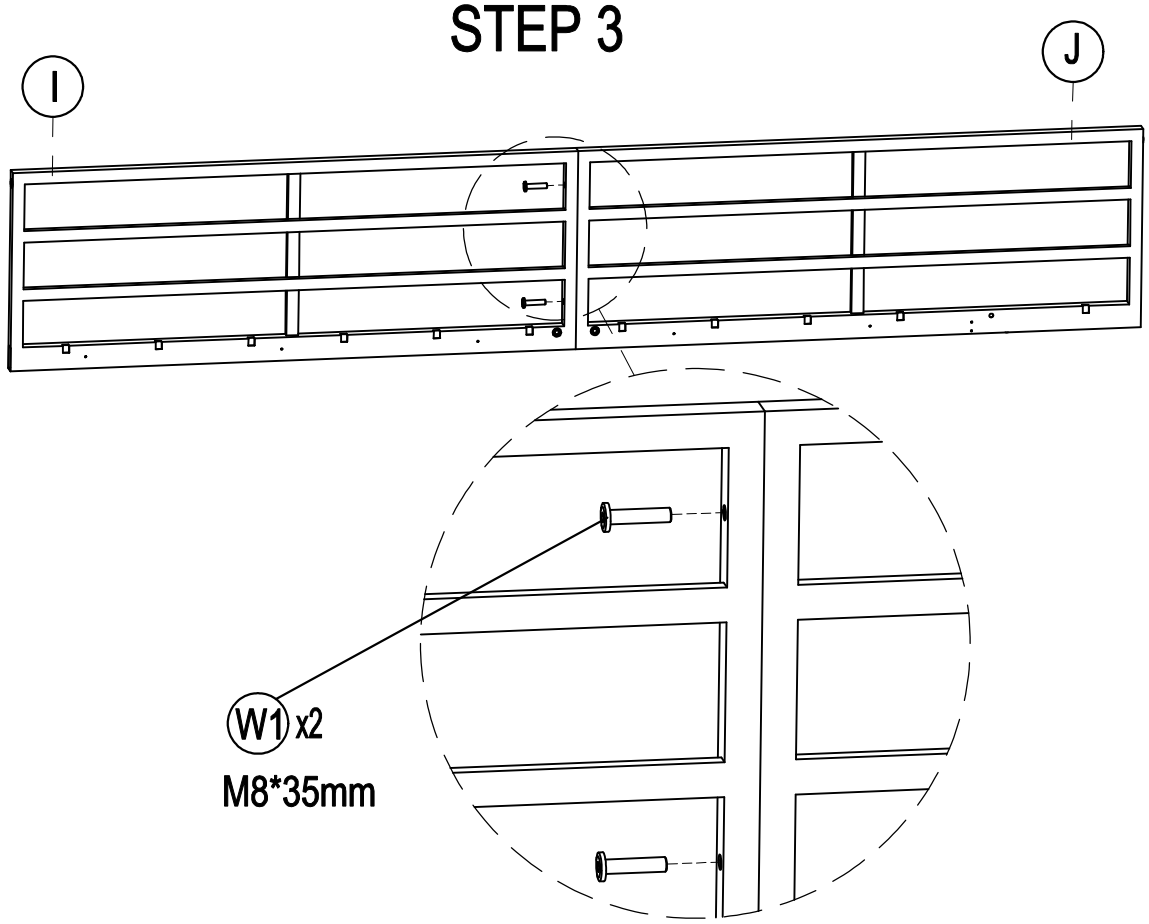


STEP 4

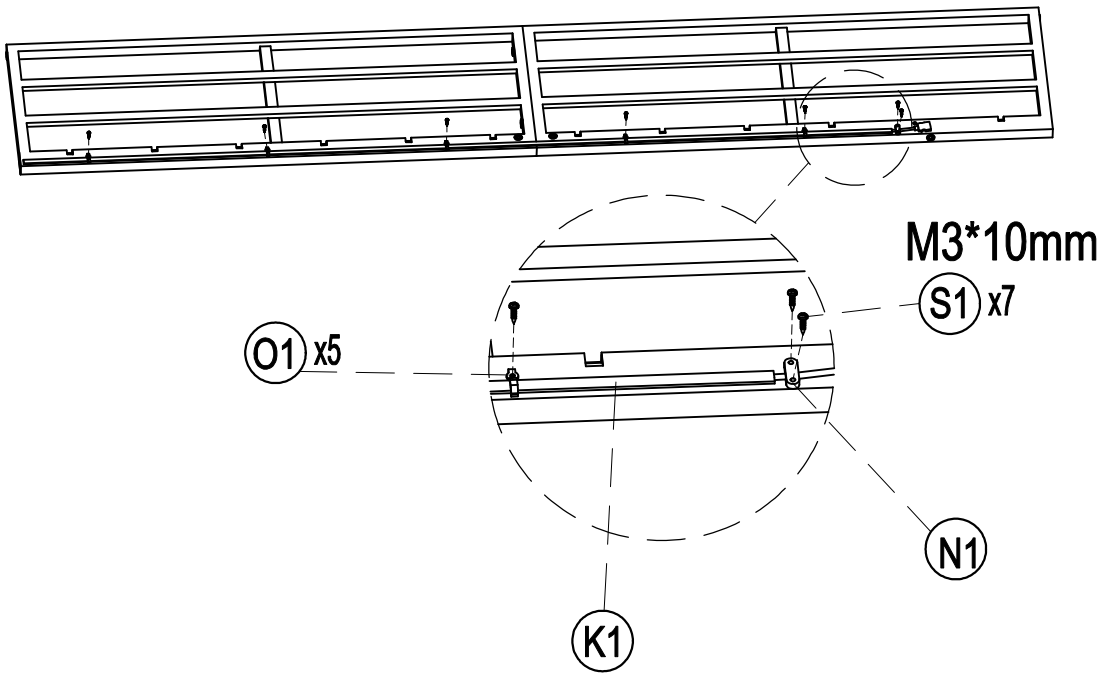


Remove the double-sided tape before installation.

STEP 5

Place them as shown in the diagram.

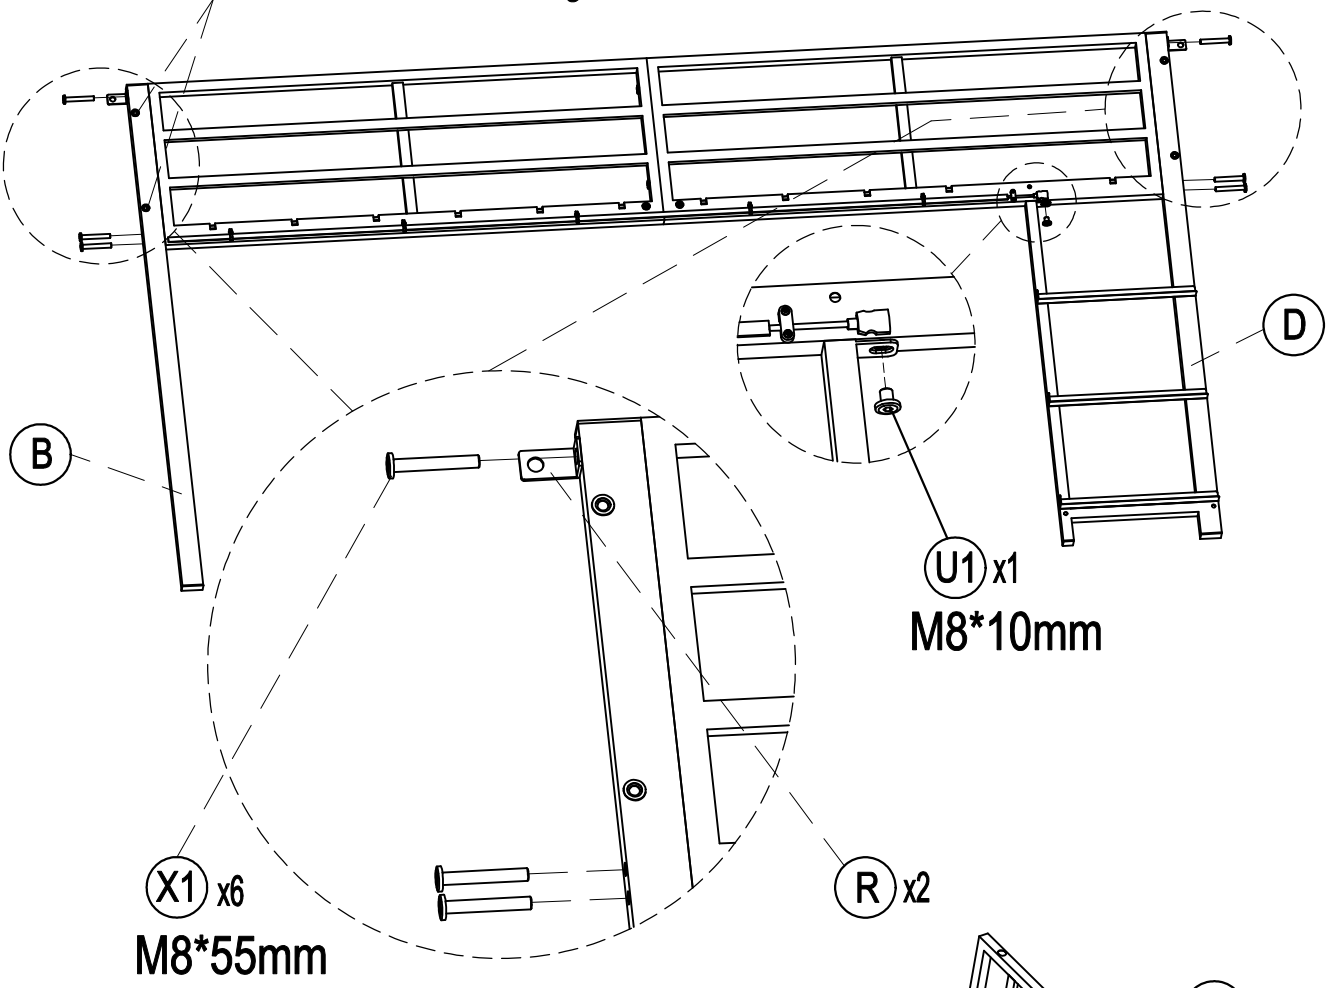


STEP 6

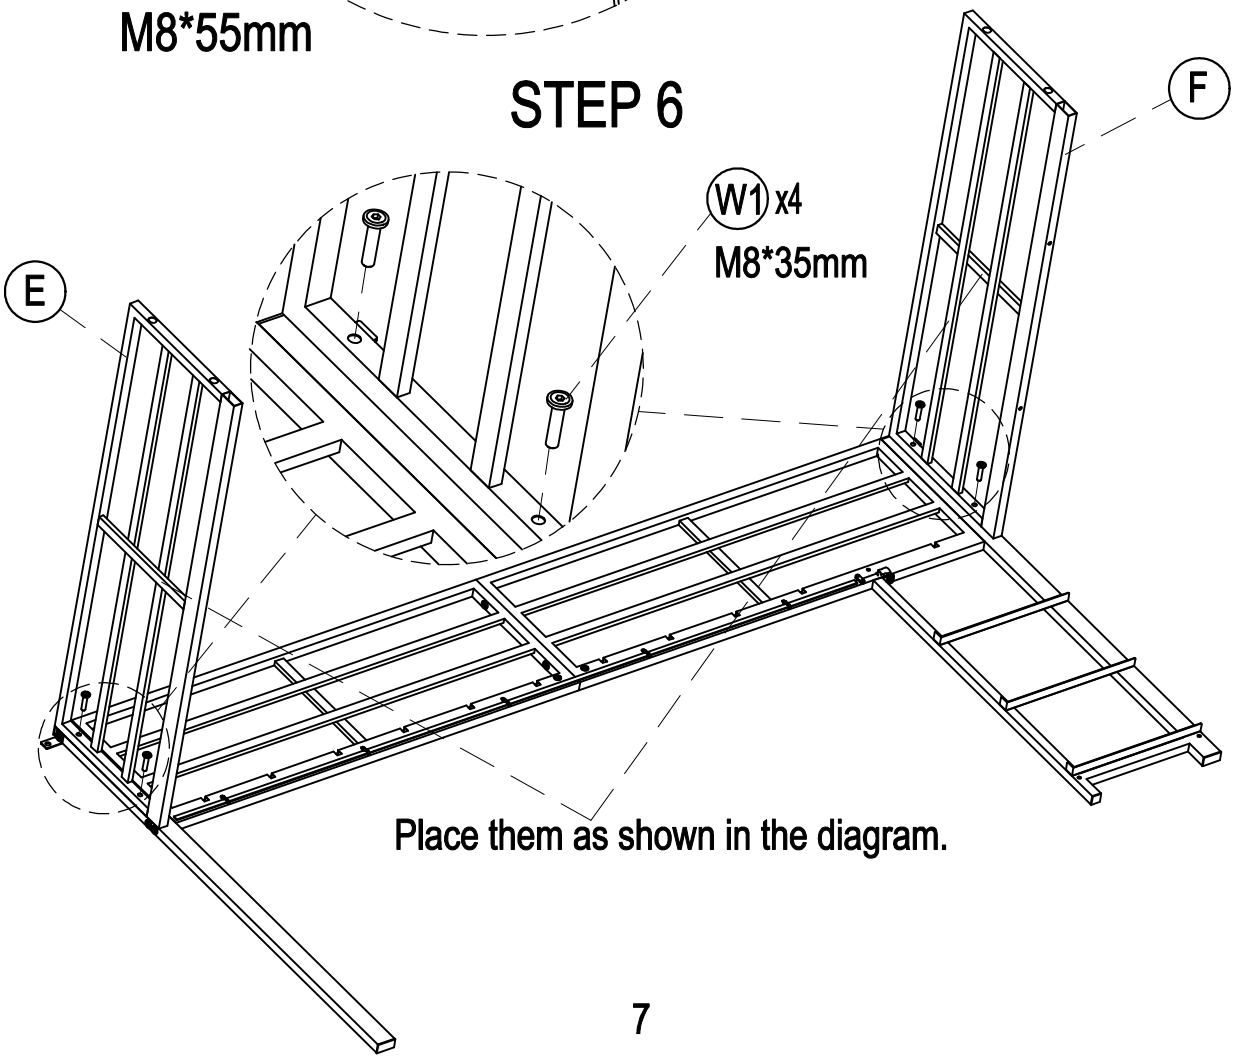


Place them as shown in the diagram.


STEP 7

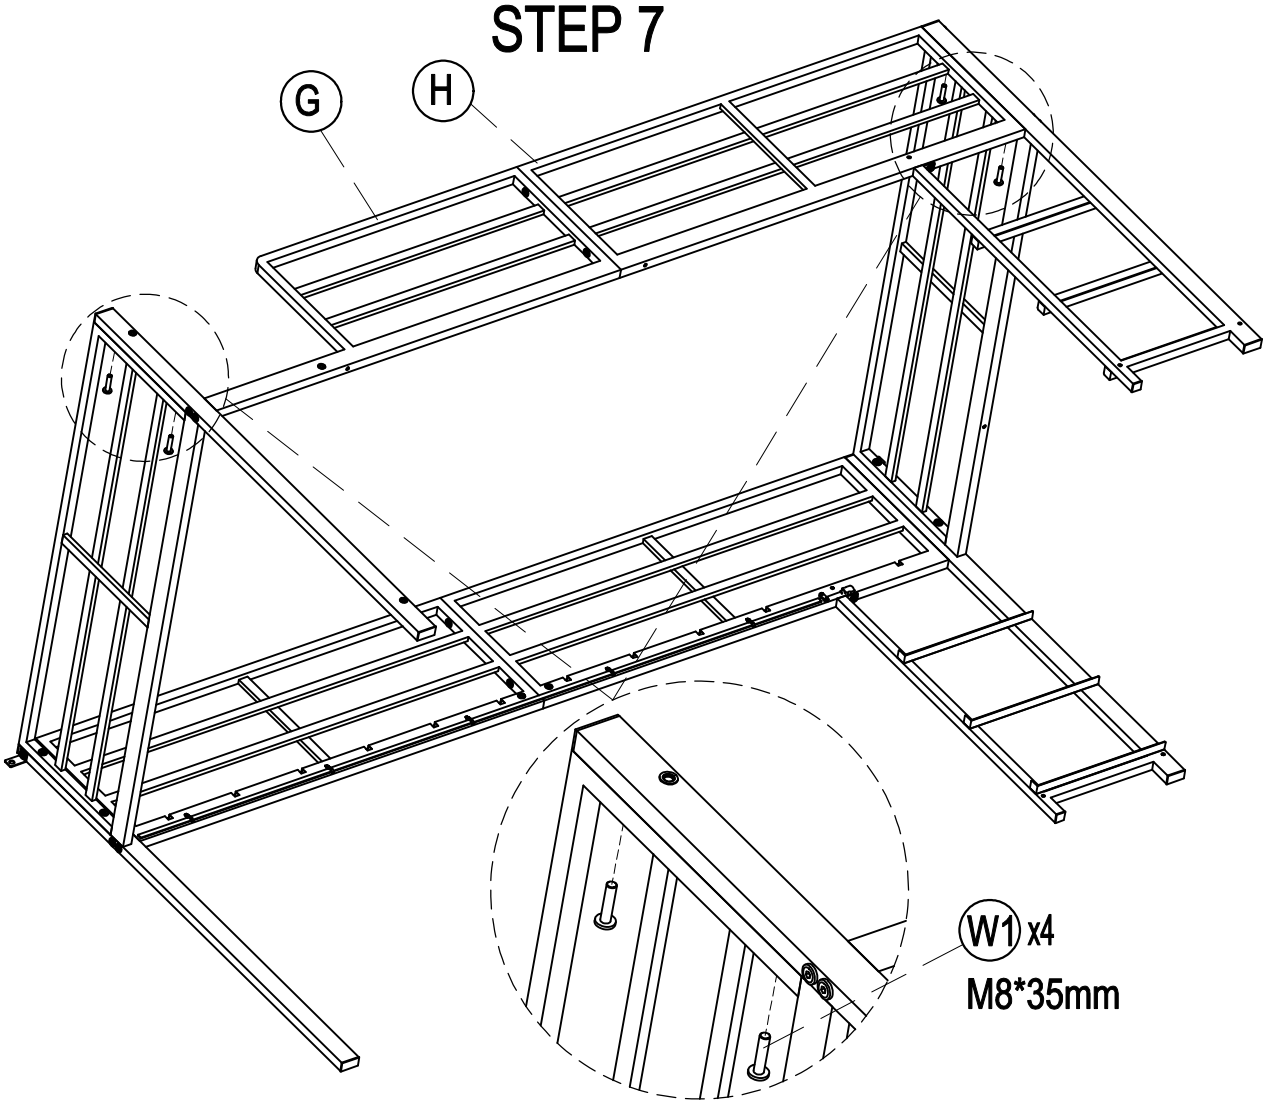


STEP 8

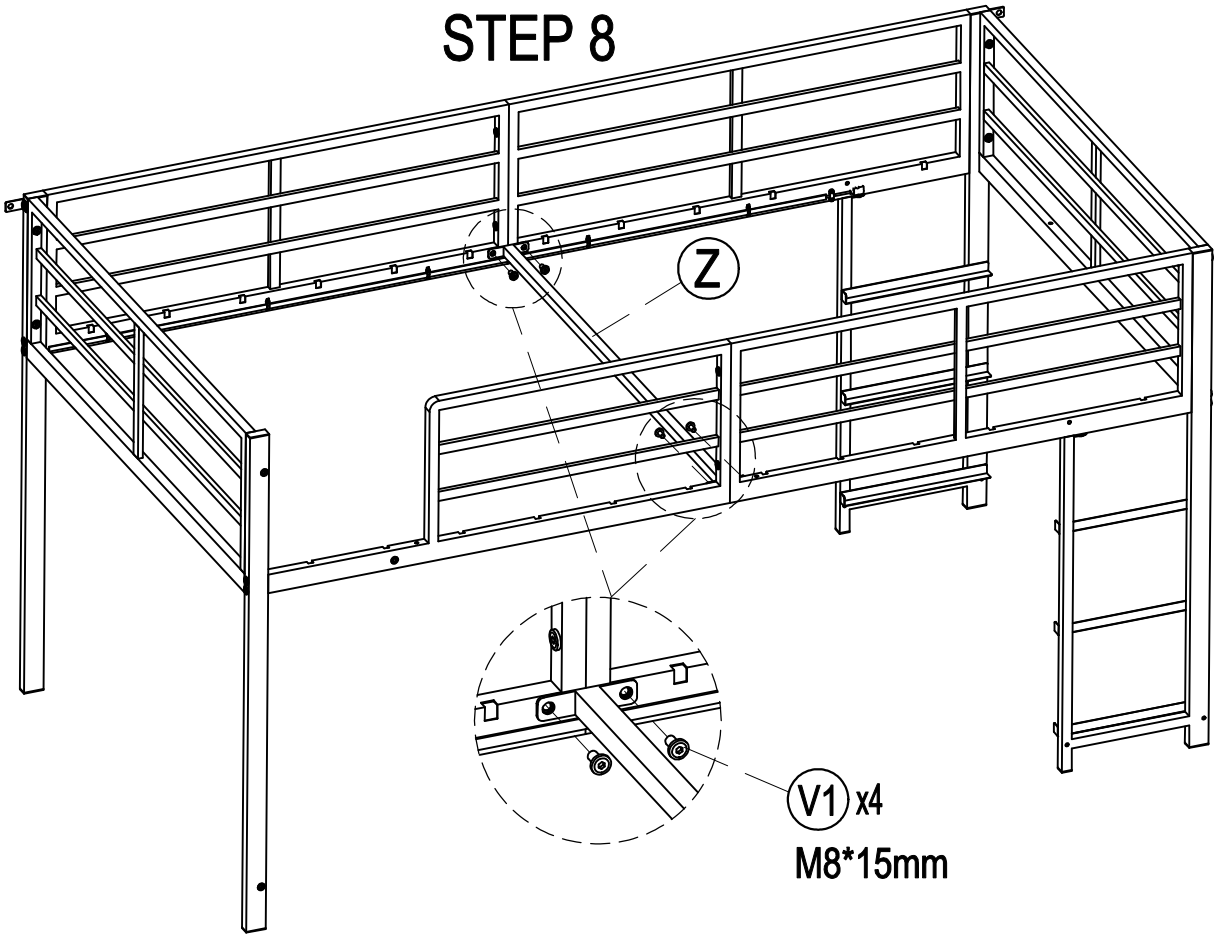

STEP 9

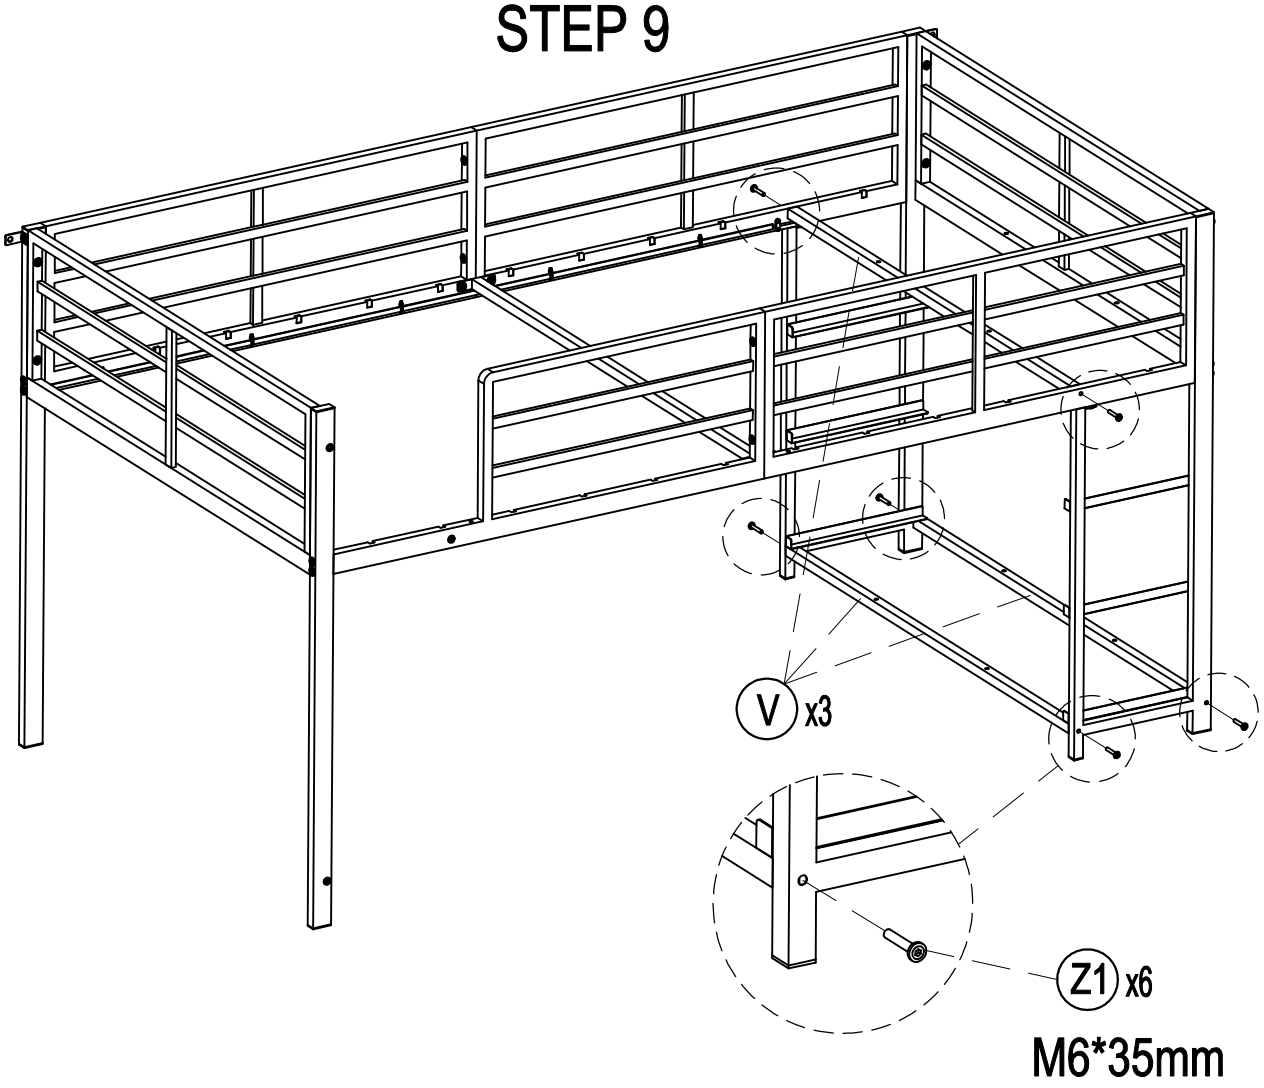


STEP 10

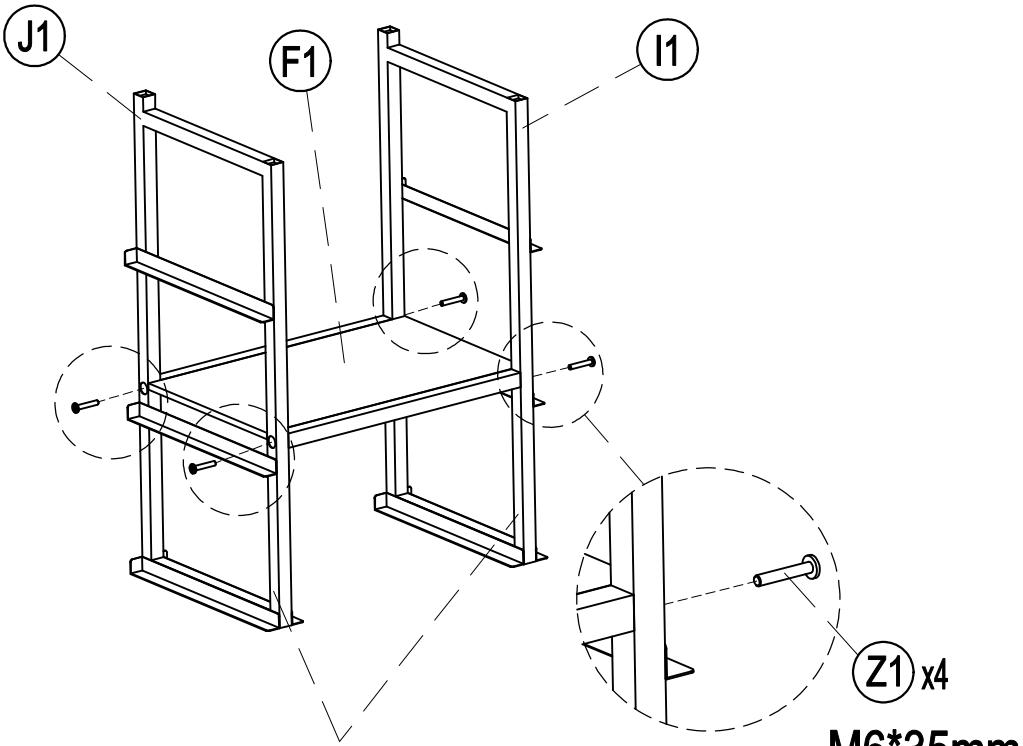


Place them as shown in the diagram.


STEP 11

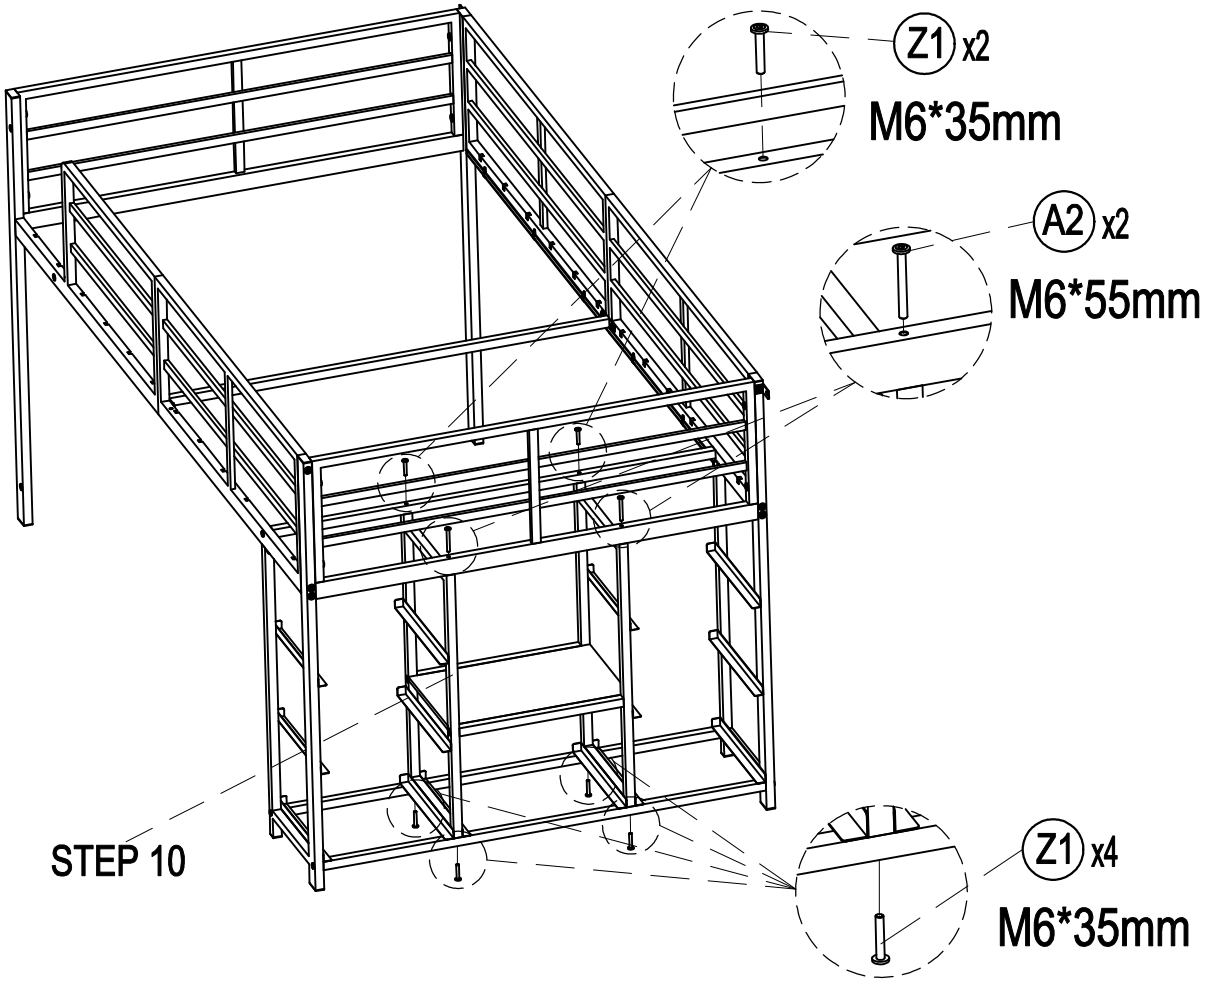


STEP 12

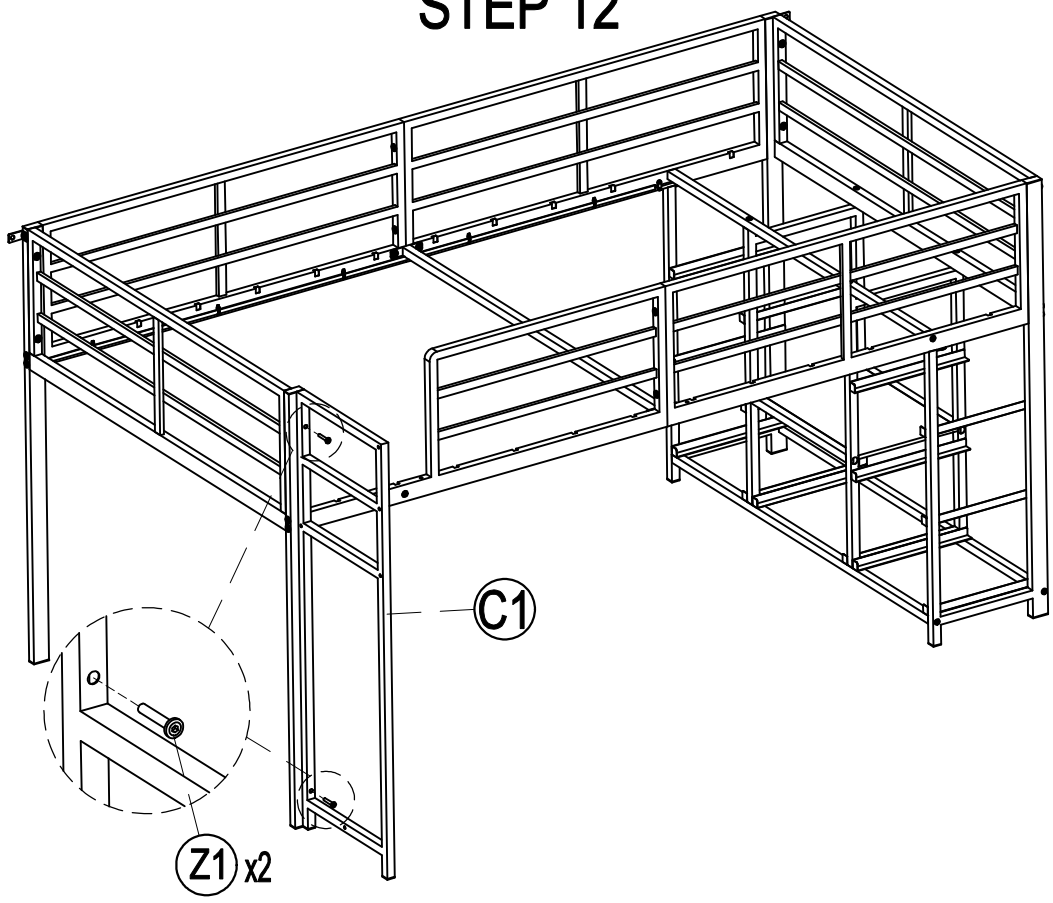


STEP 13

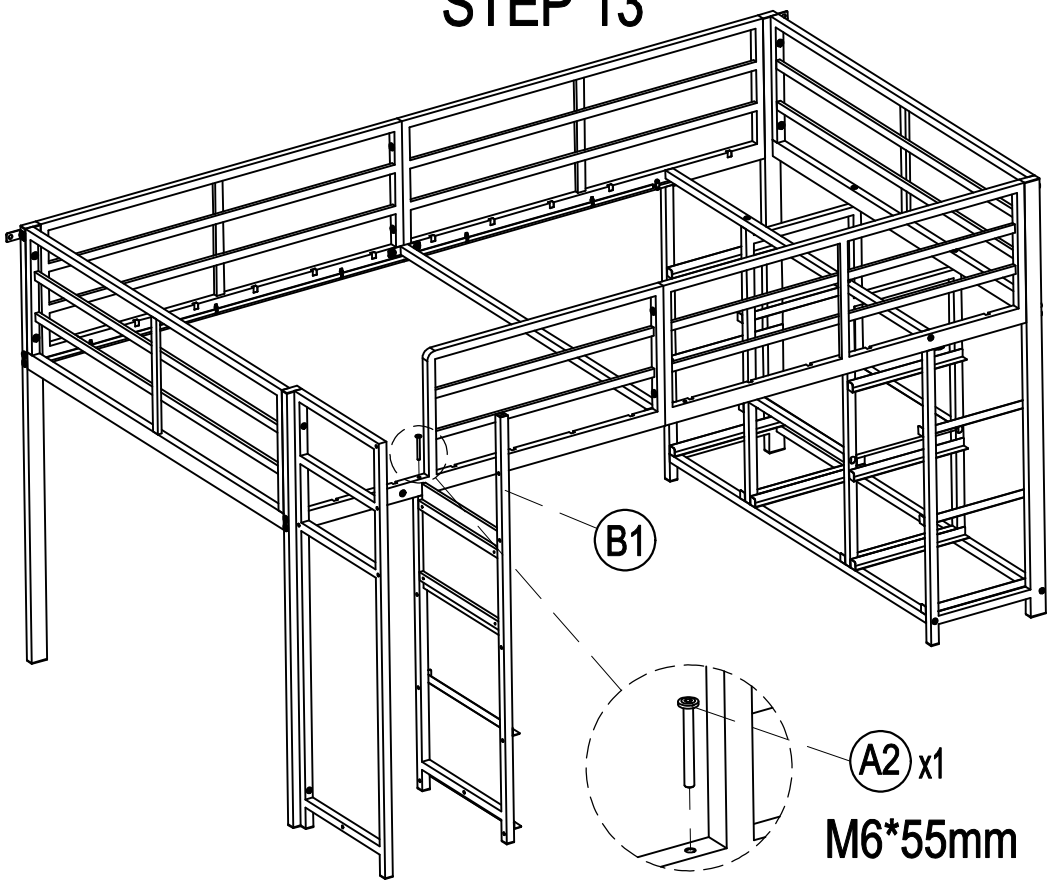


STEP 14

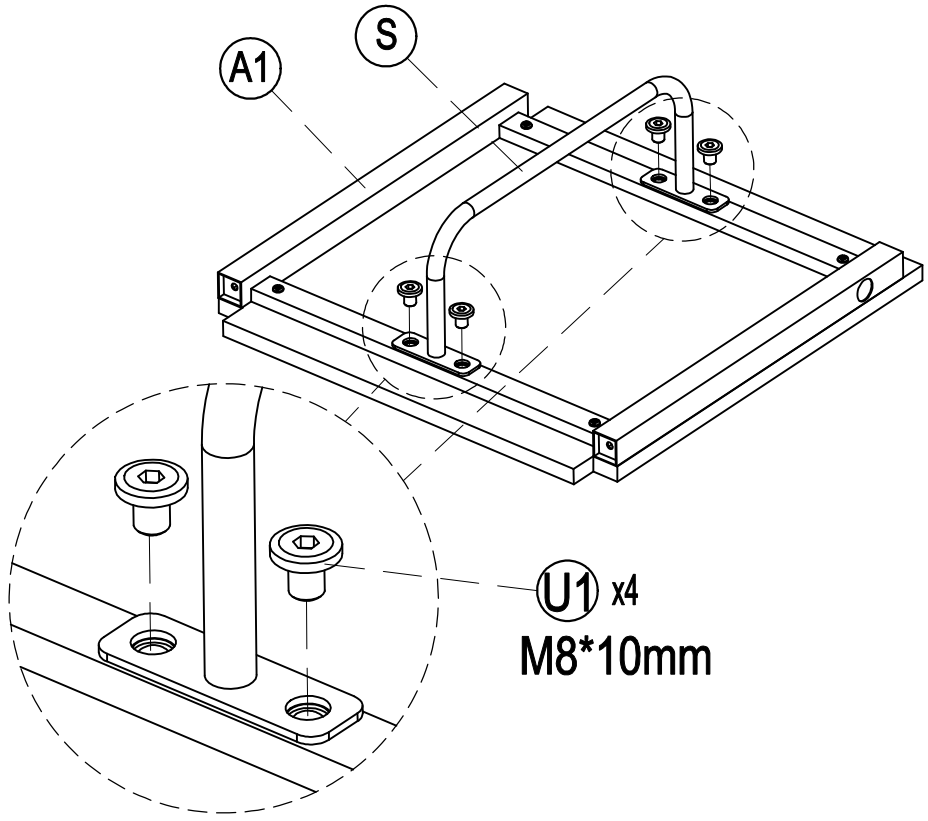


STEP 15

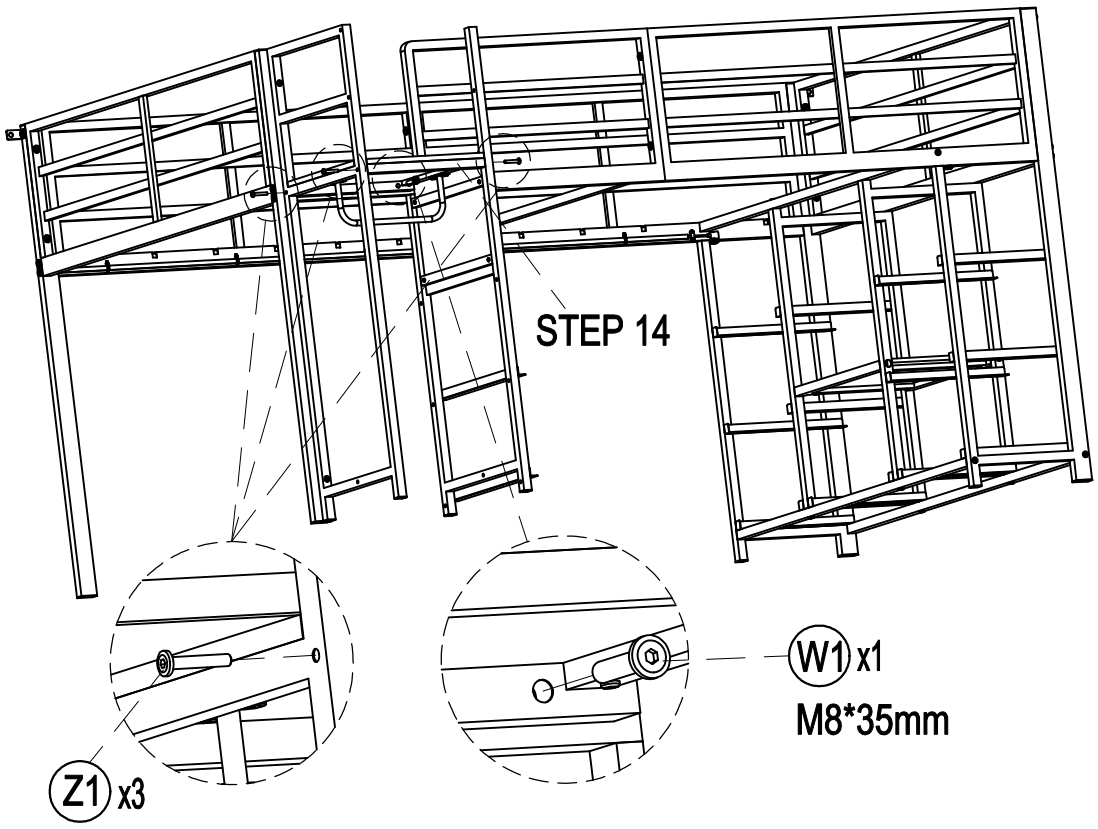


STEP 16

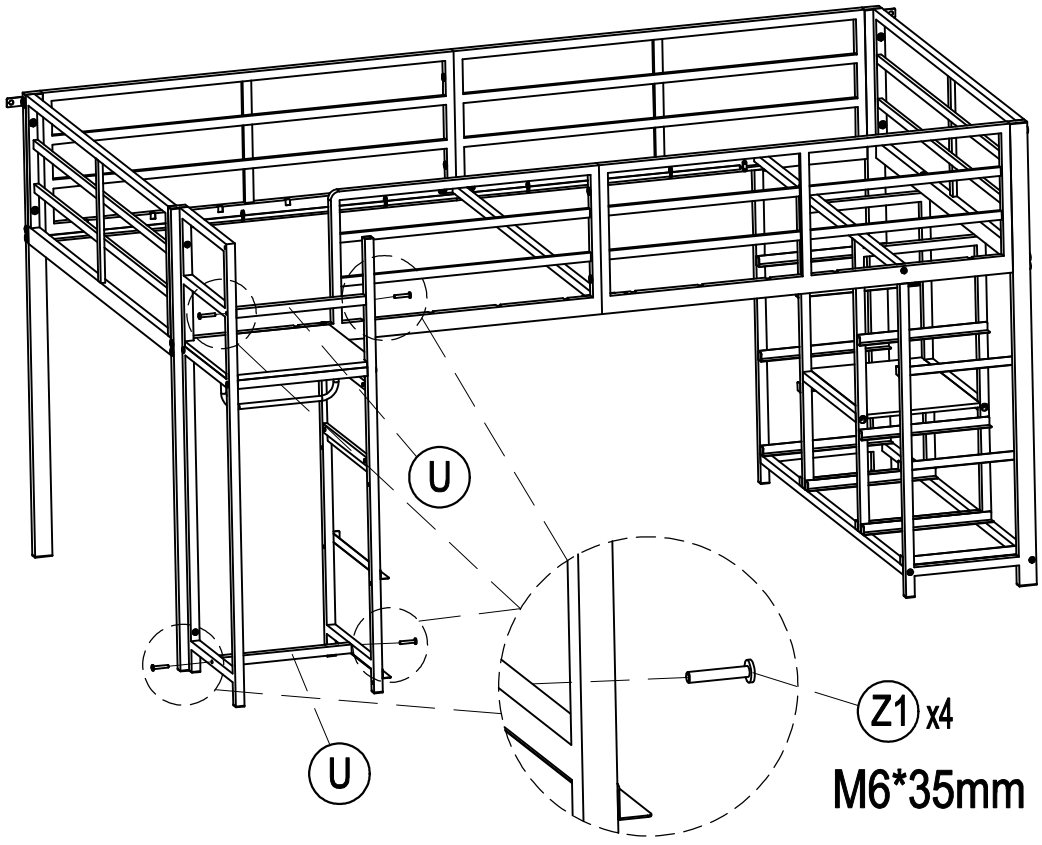


STEP 17

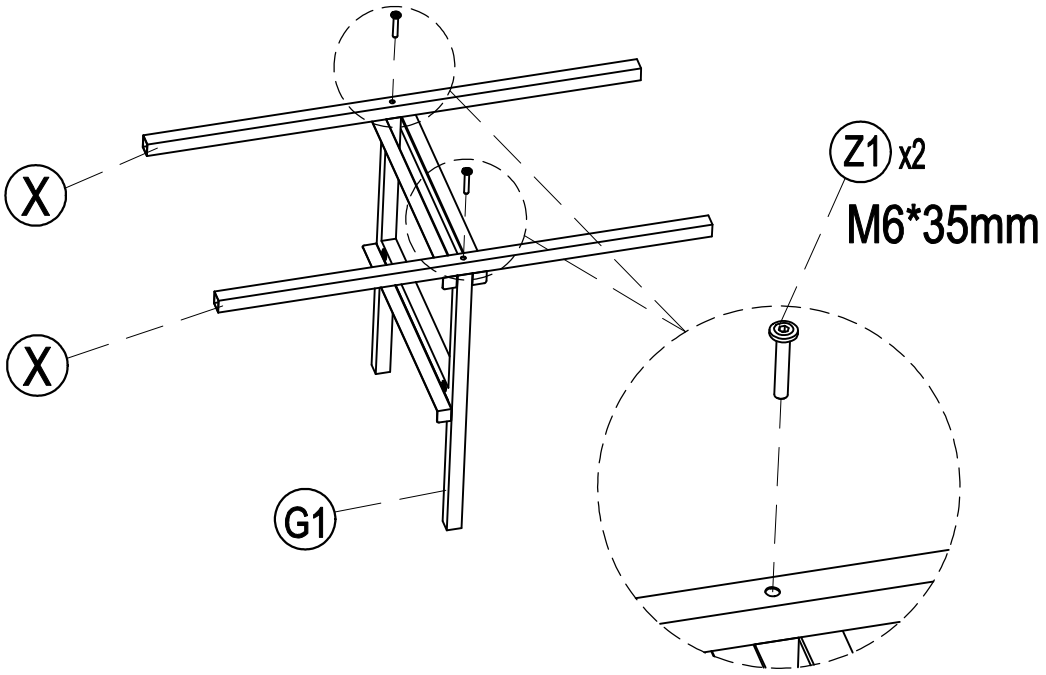


STEP 18

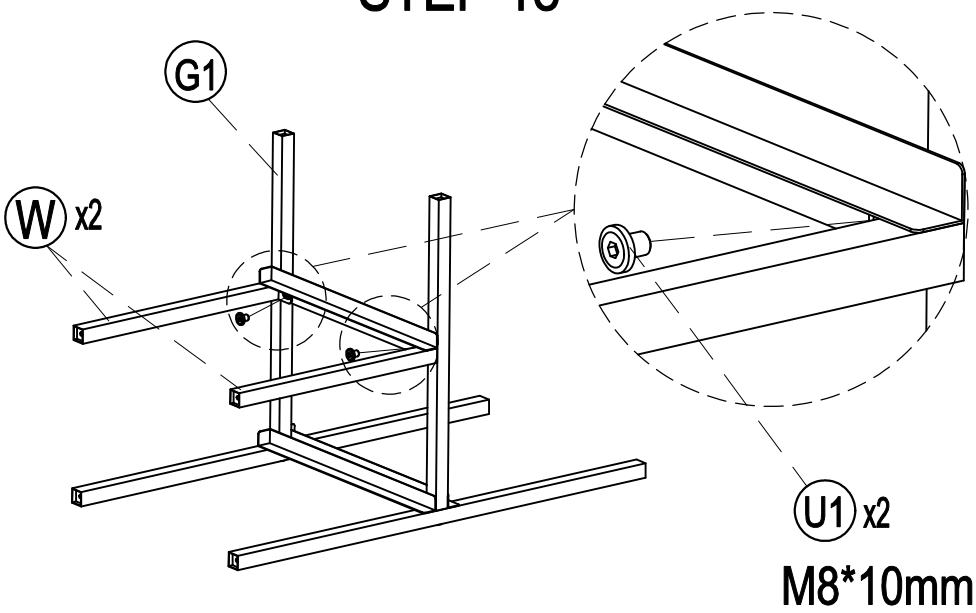


STEP 19

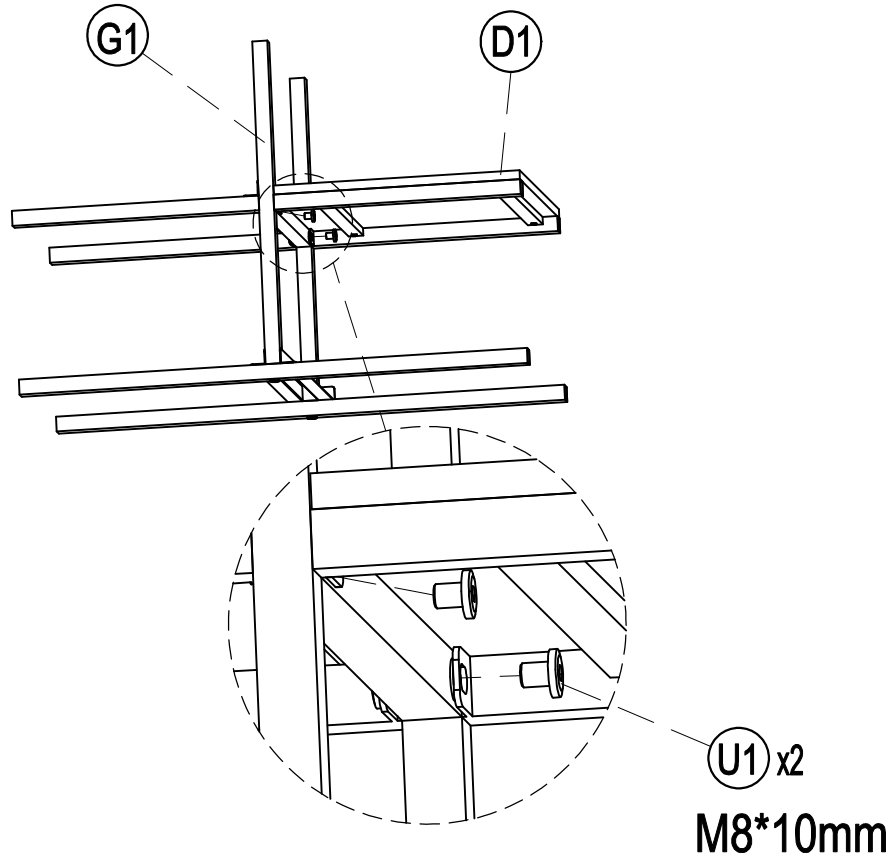


STEP 20

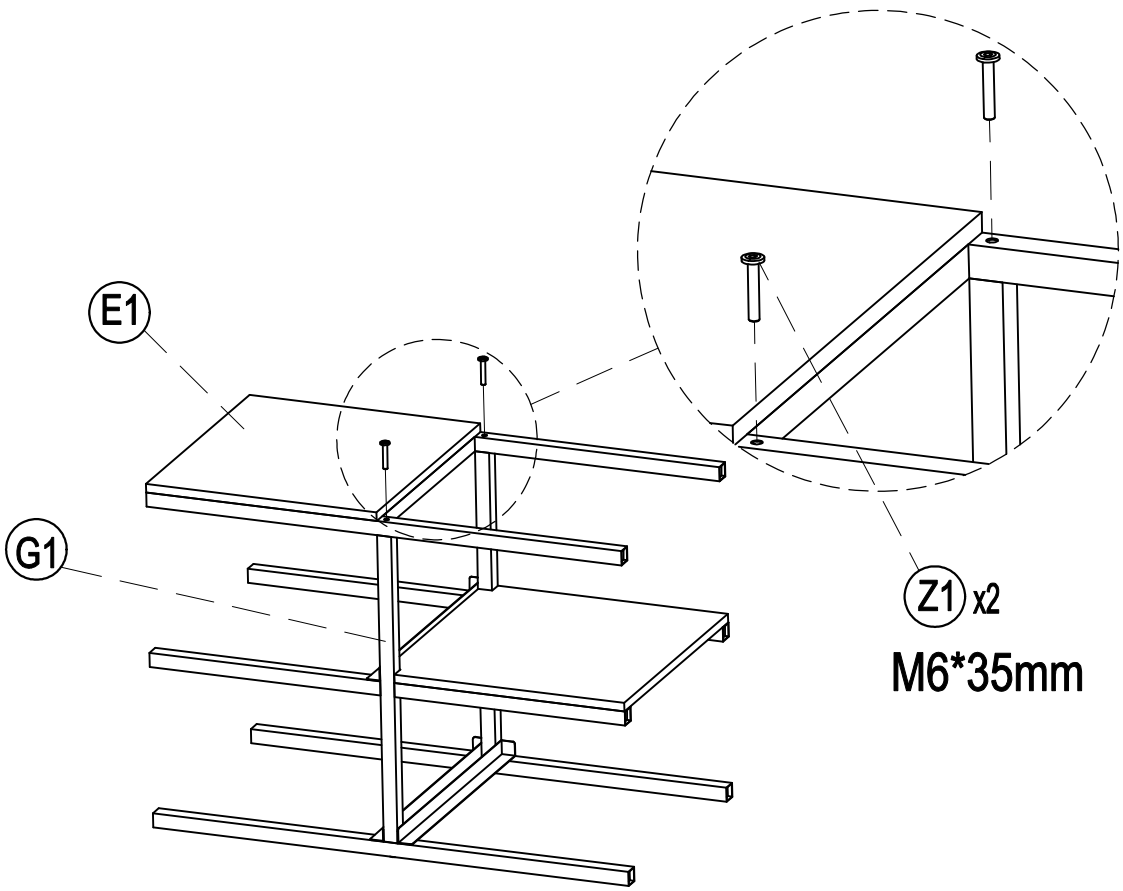


STEP 21

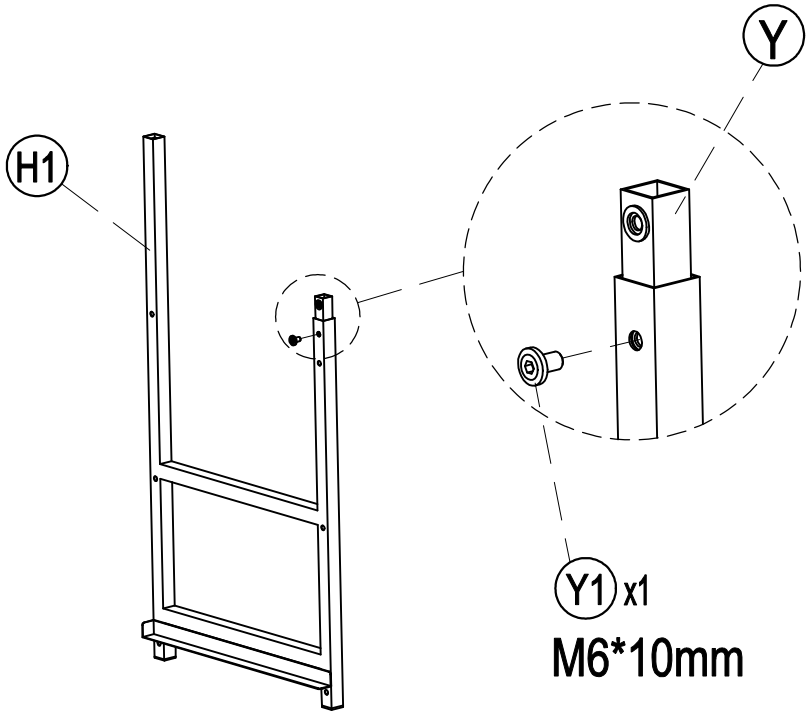


STEP 22

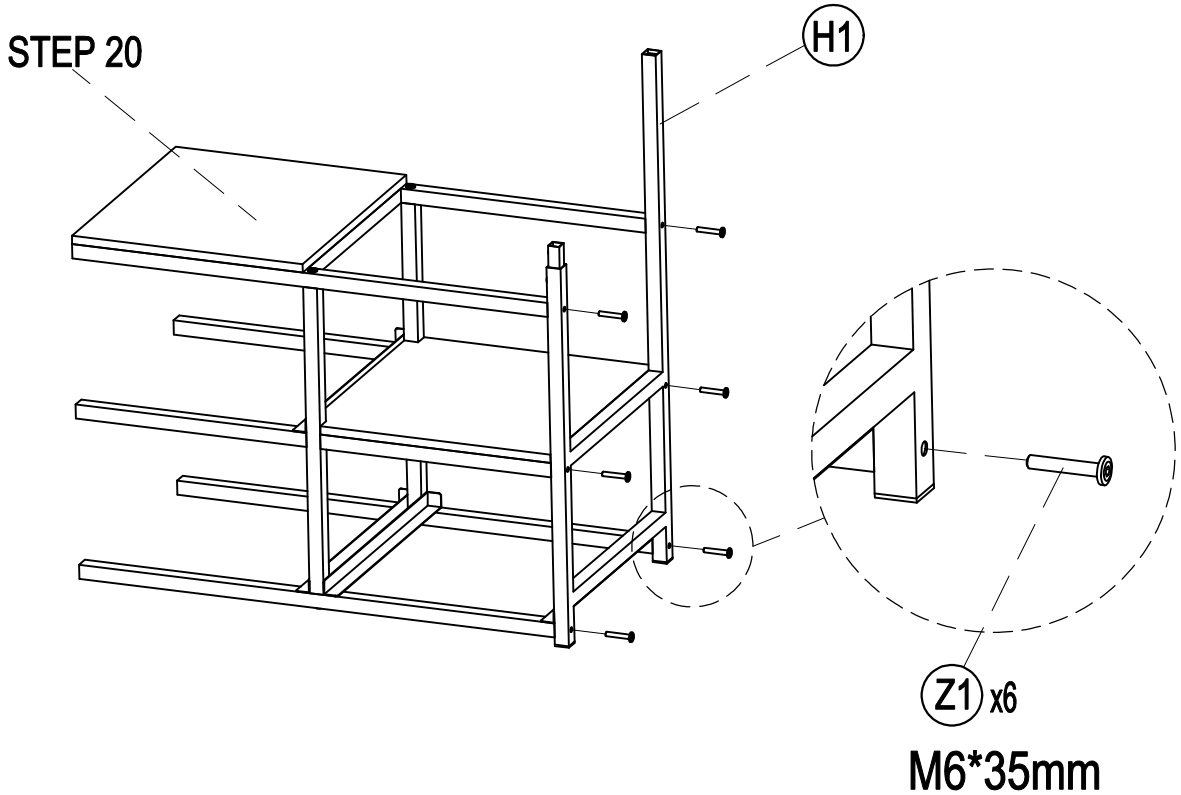


STEP 23

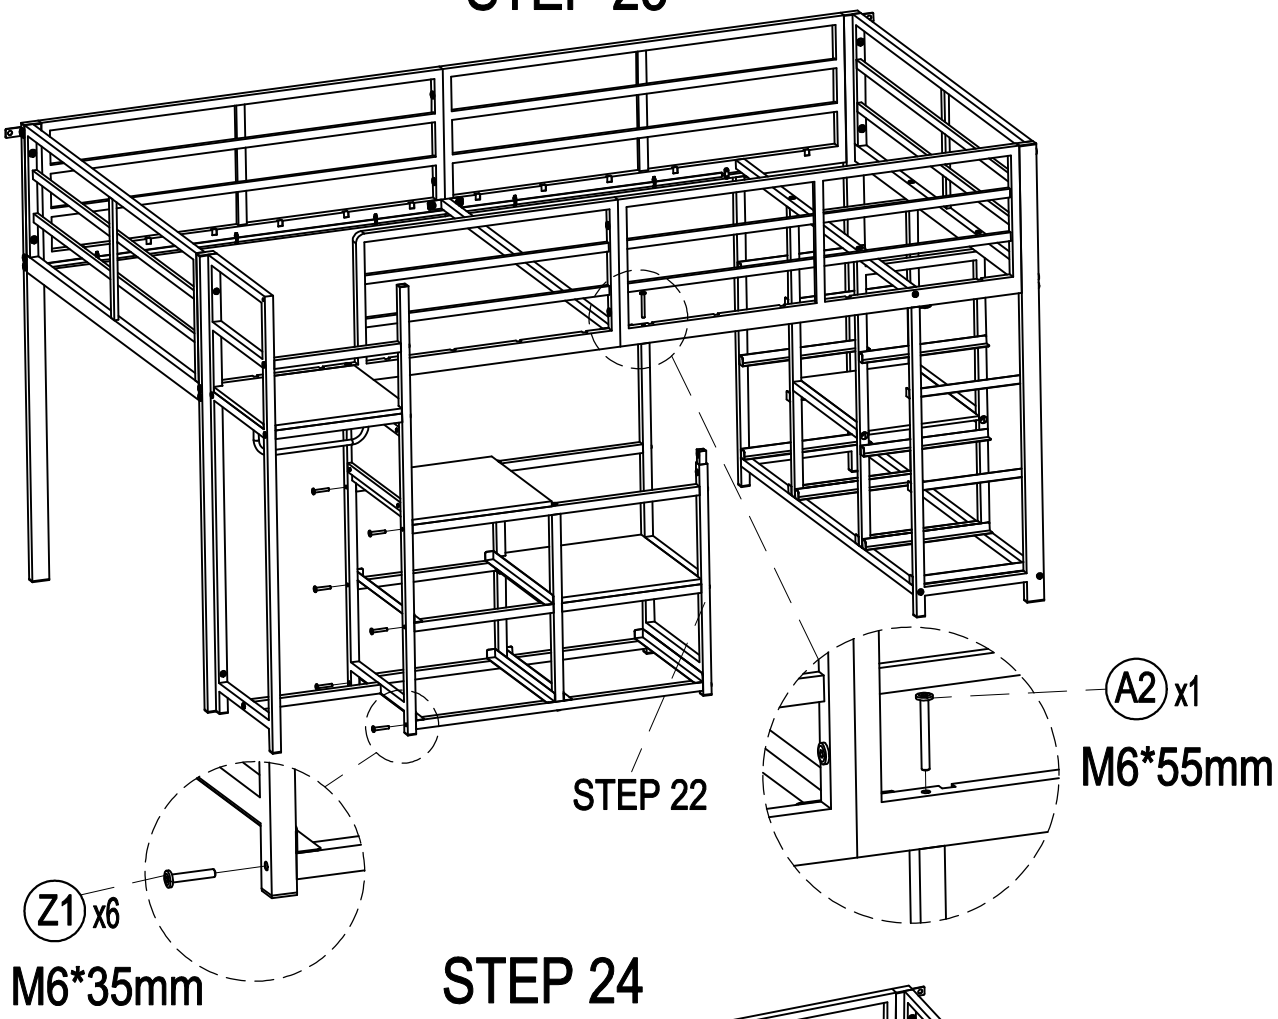

STEP 24

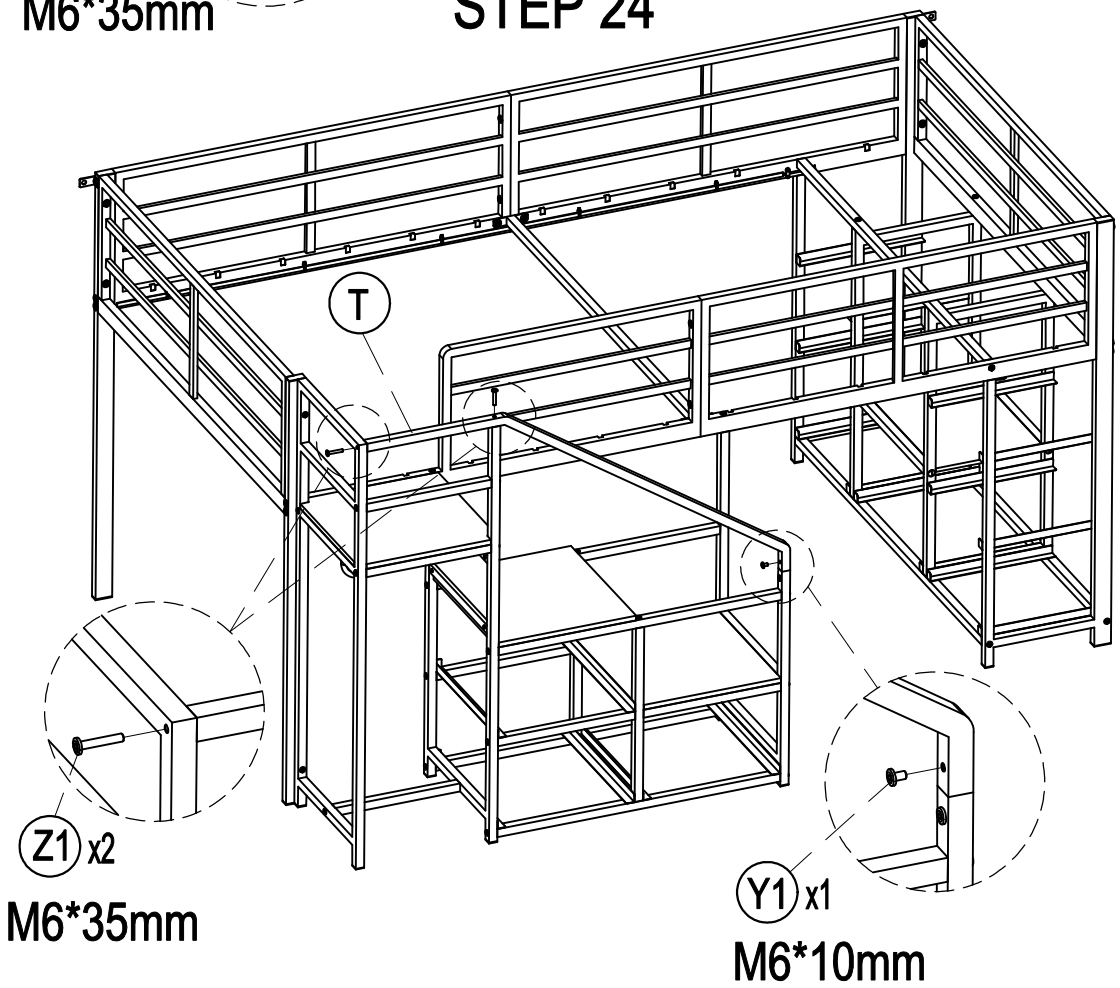


STEP 25

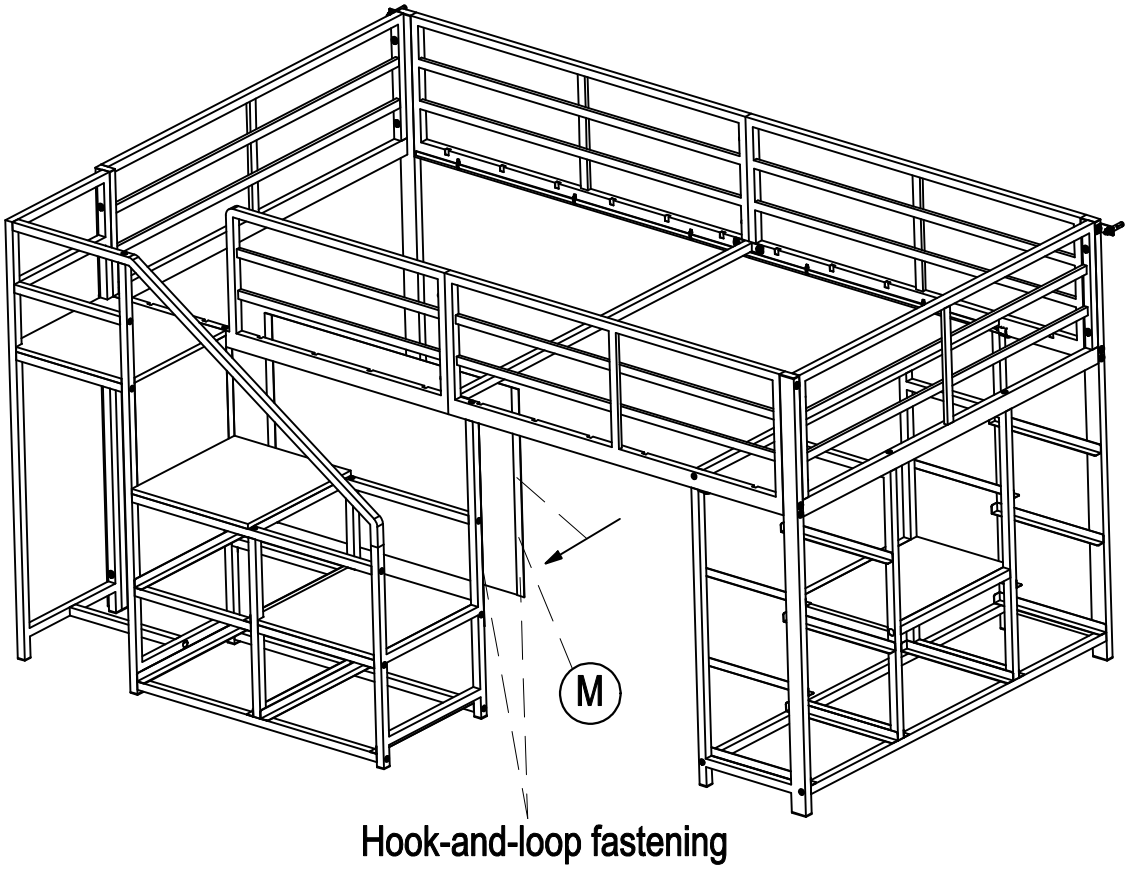


Hook-and-loop fastening


STEP 26

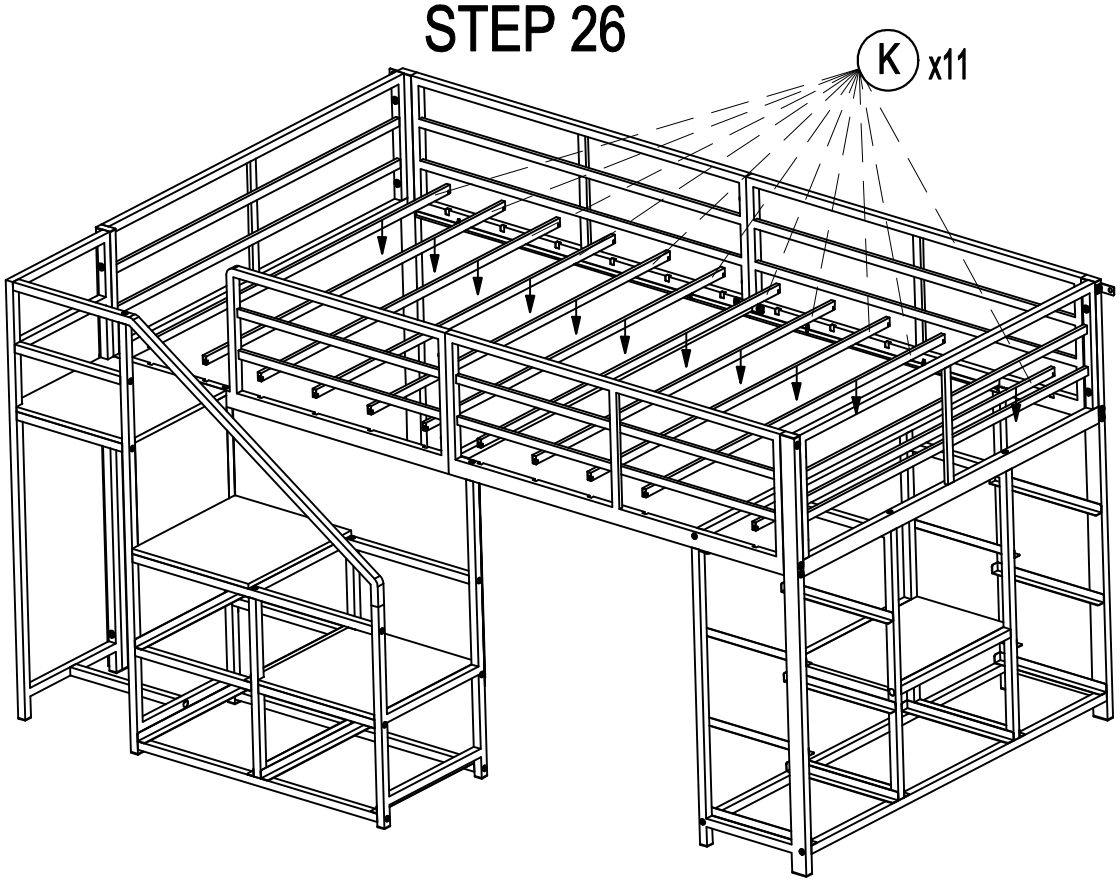

STEP 27

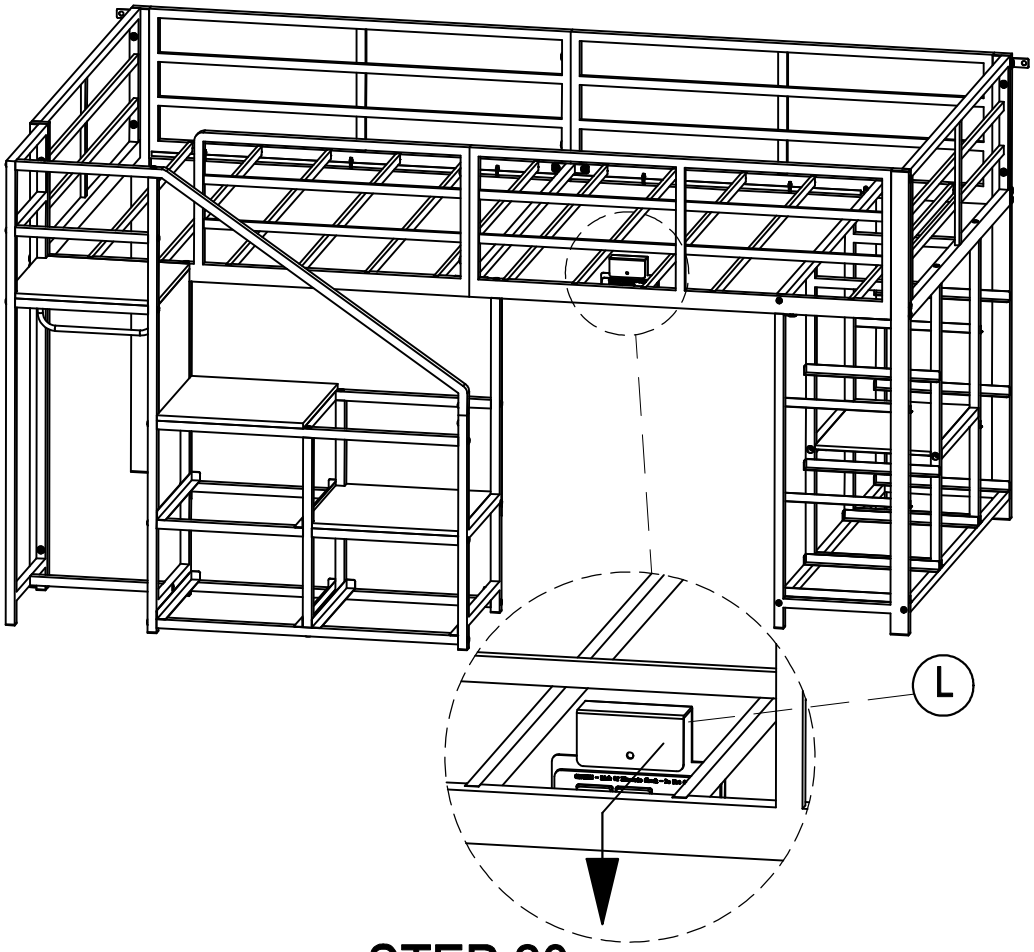


STEP 28

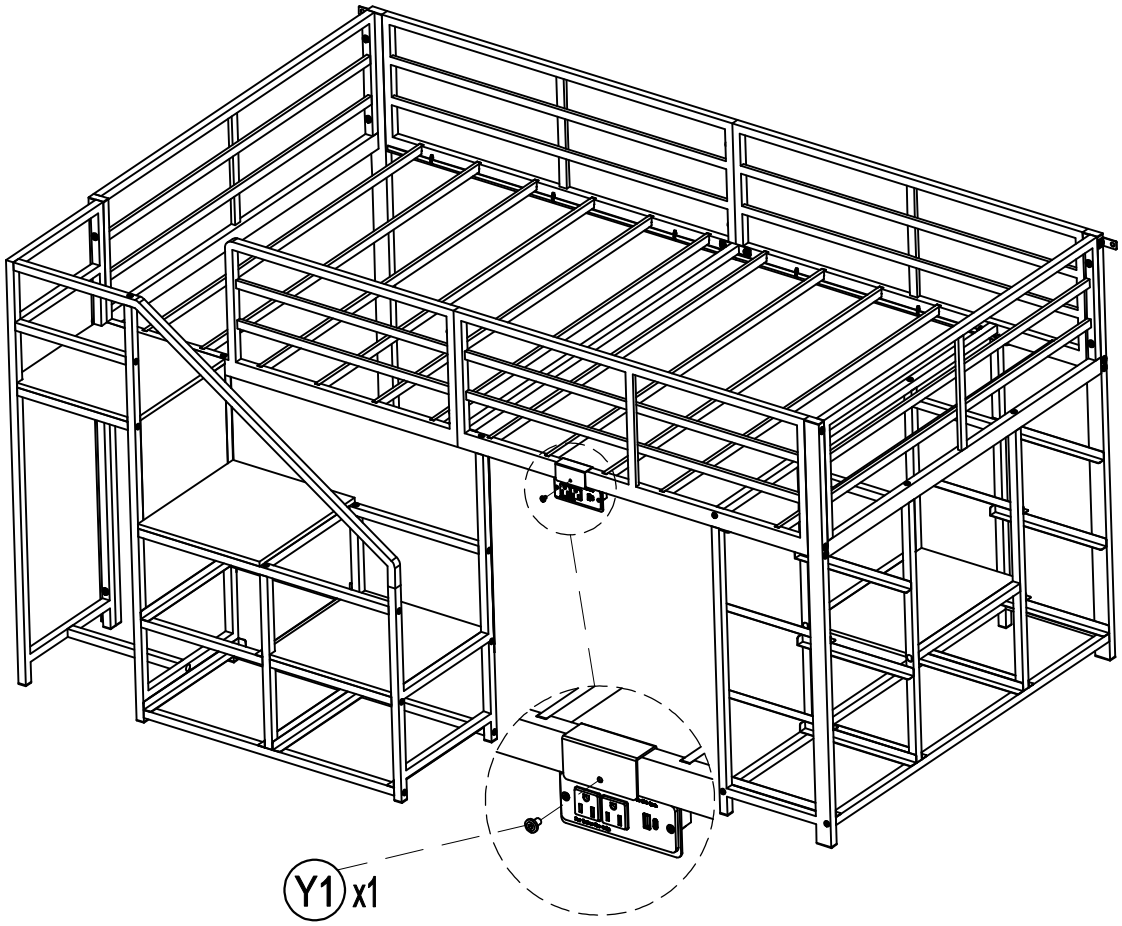

M6*10mm


STEP 29

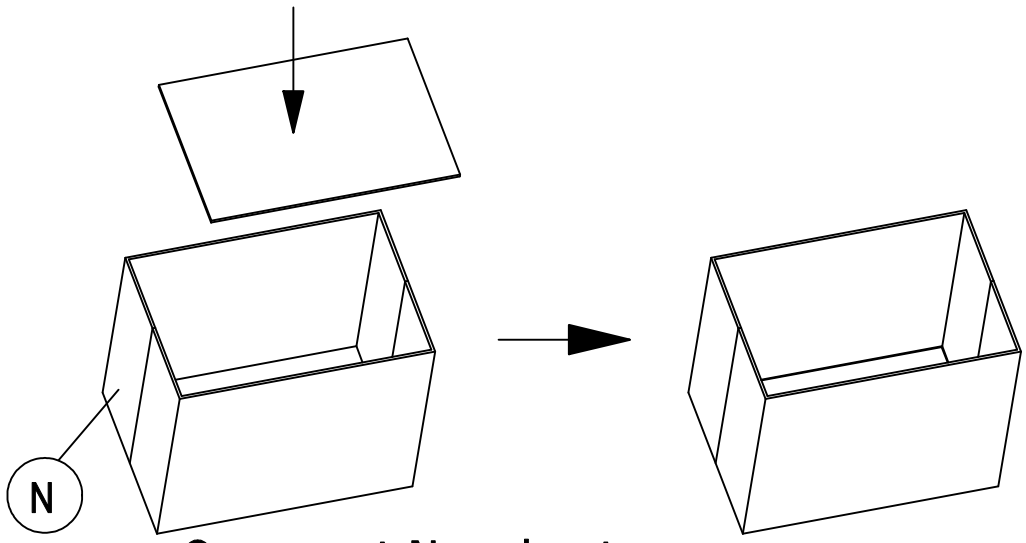


Open part N and put the base board in

3pcs

STEP 30

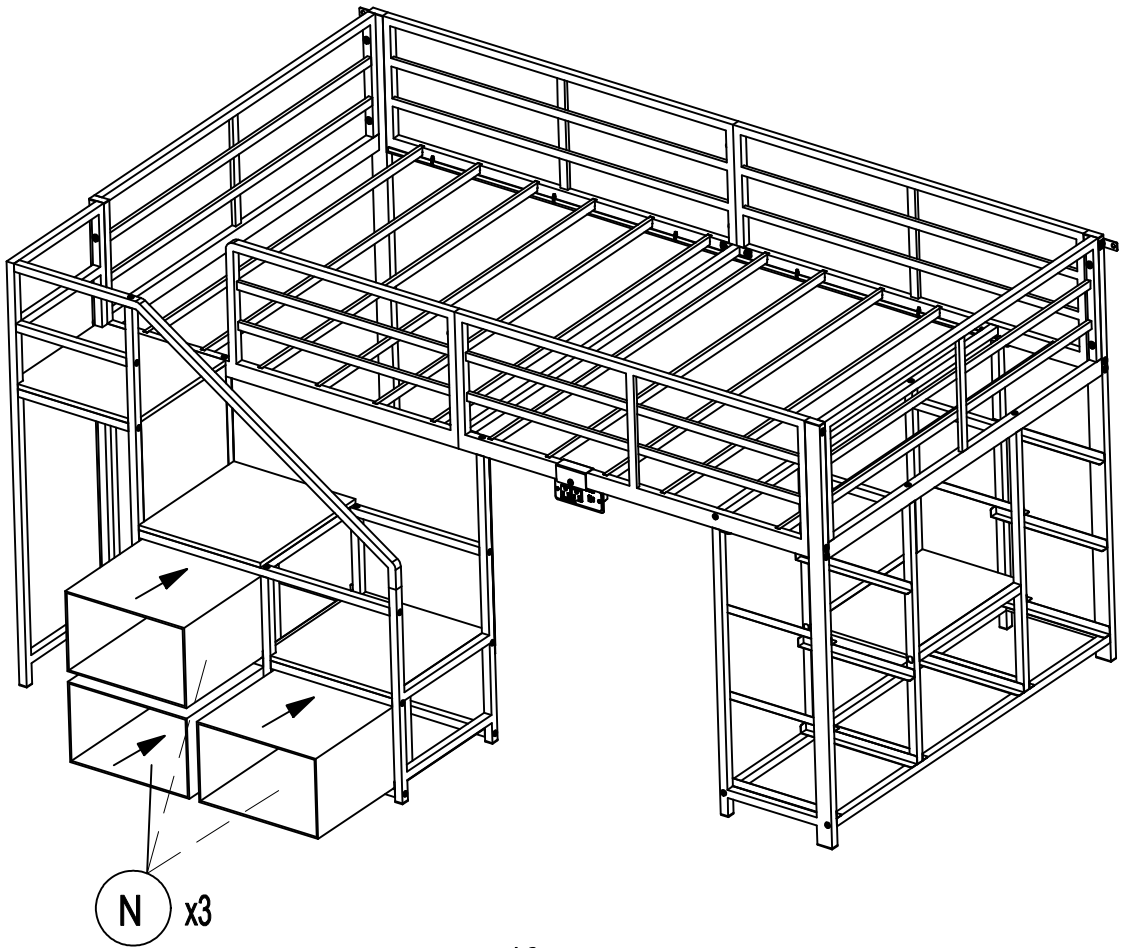


STEP 31

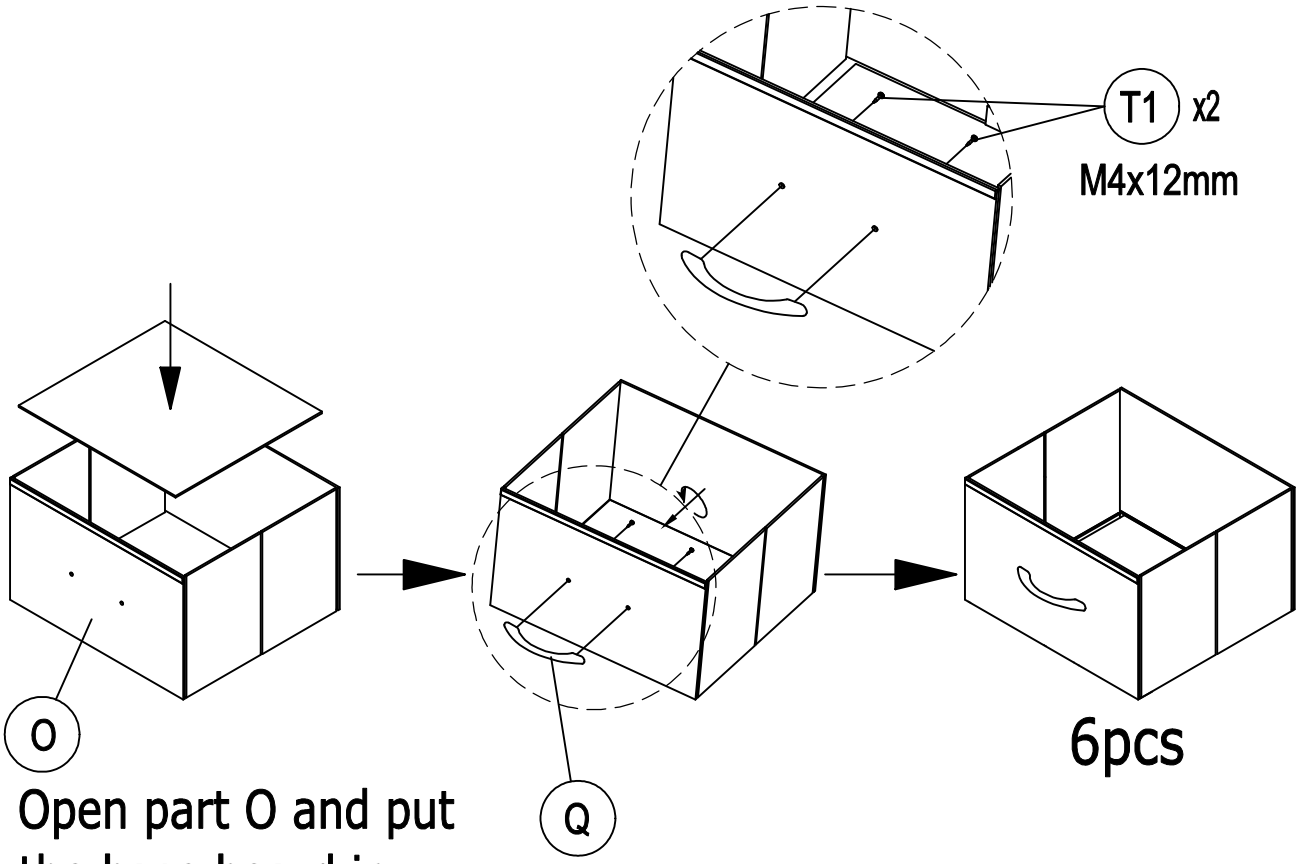


Open part O and put the base board in

STEP 32

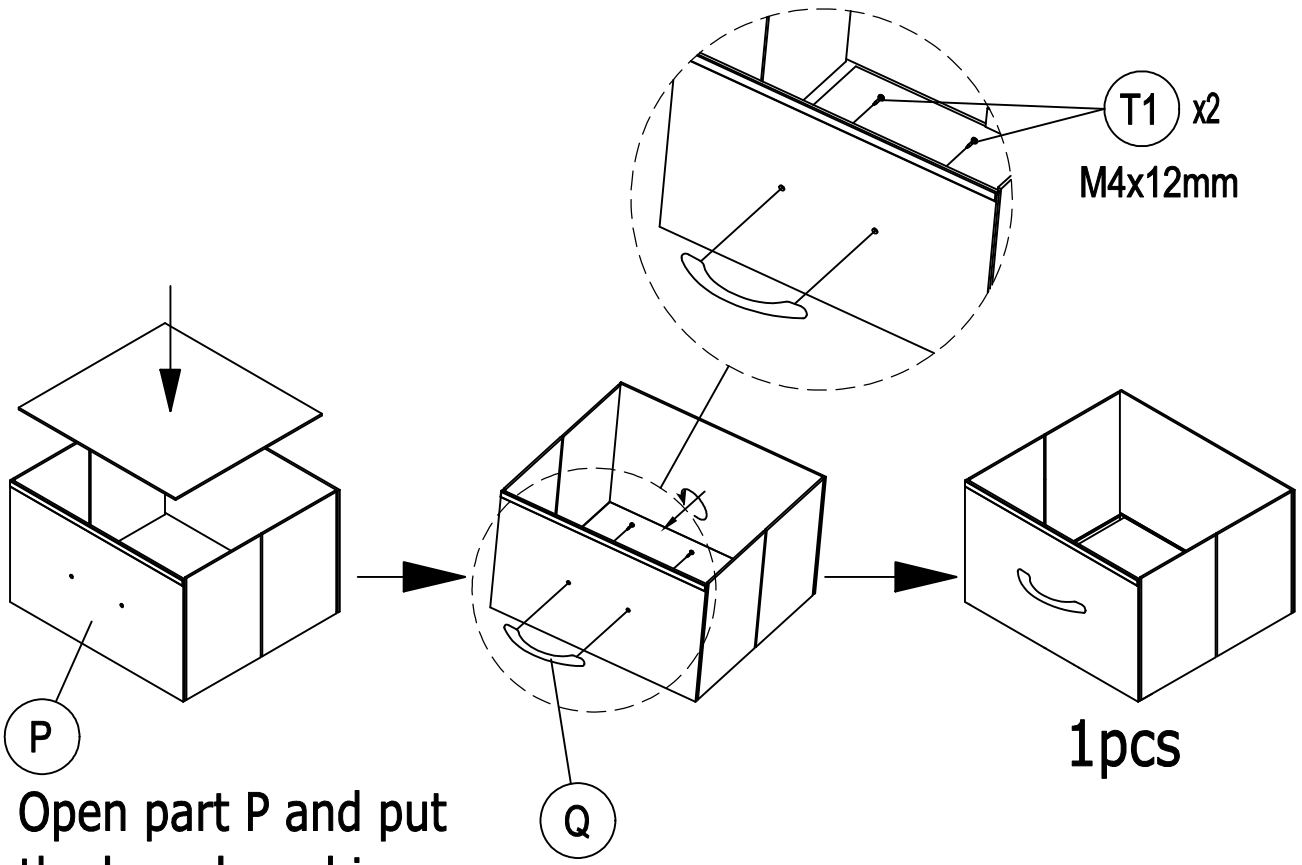


Open part P and put the base board in

STEP 33

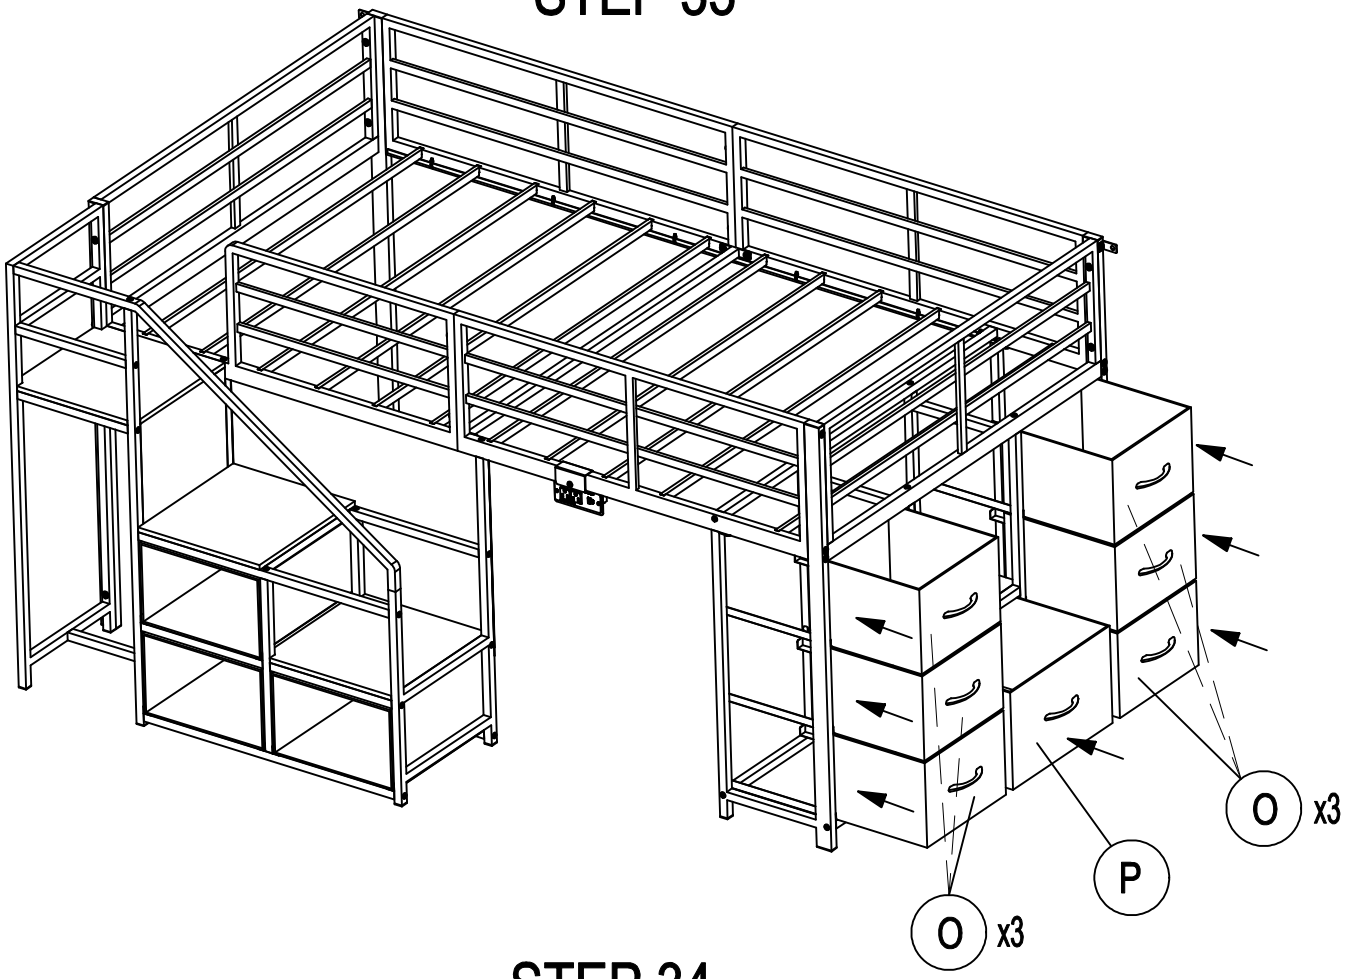


STEP 34

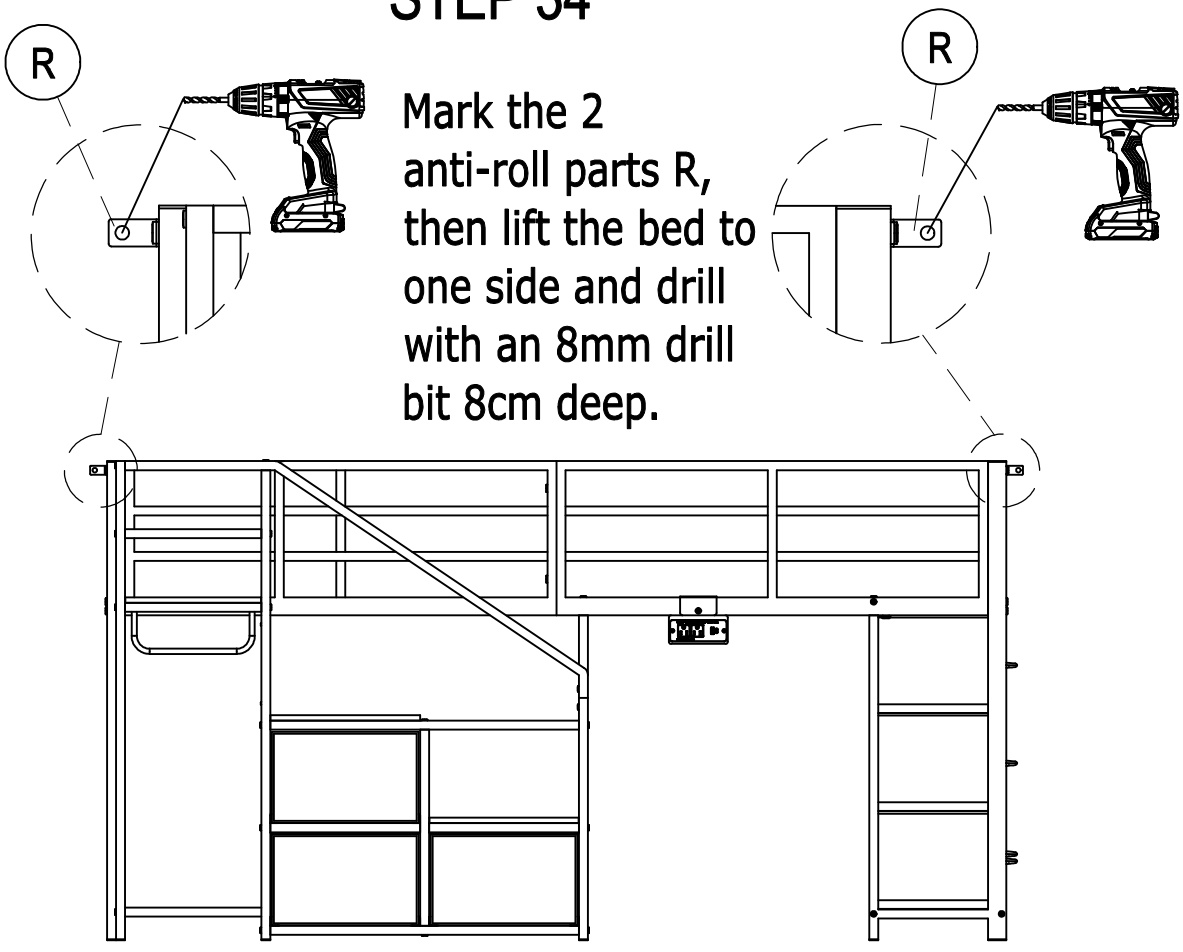

Mark the 2 anti-roll parts R, then lift the bed to one side and drill with an 8mm drill bit 8cm deep.


STEP 35

8mm drill hole

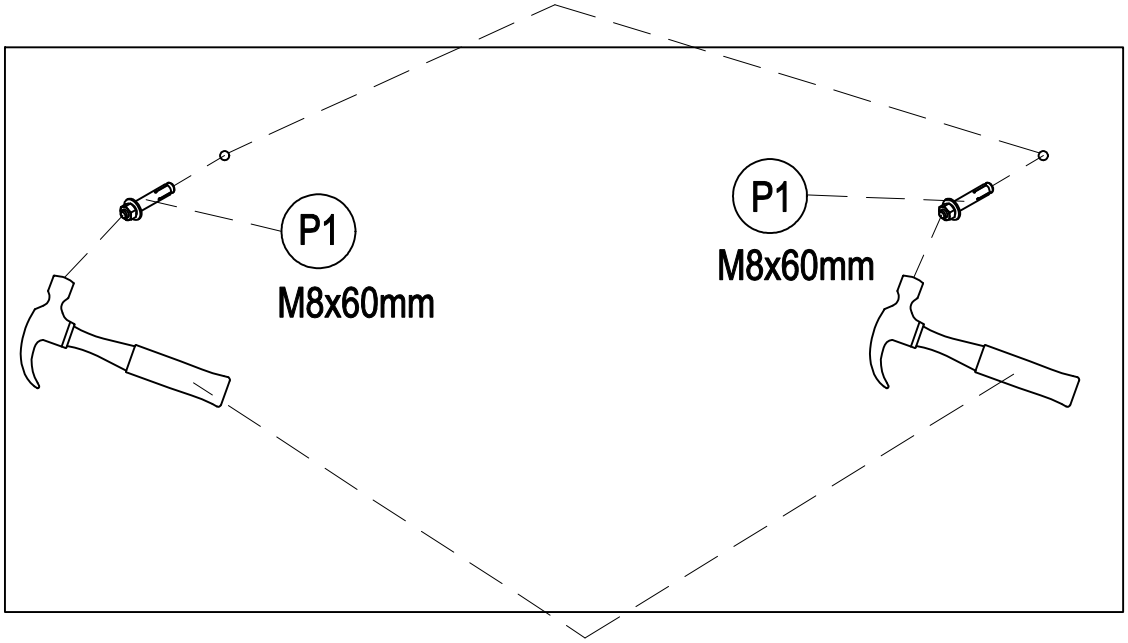


Use a hammer to hammer the P1-shaped iron plug into the 8mm drilled hole.

STEP 36

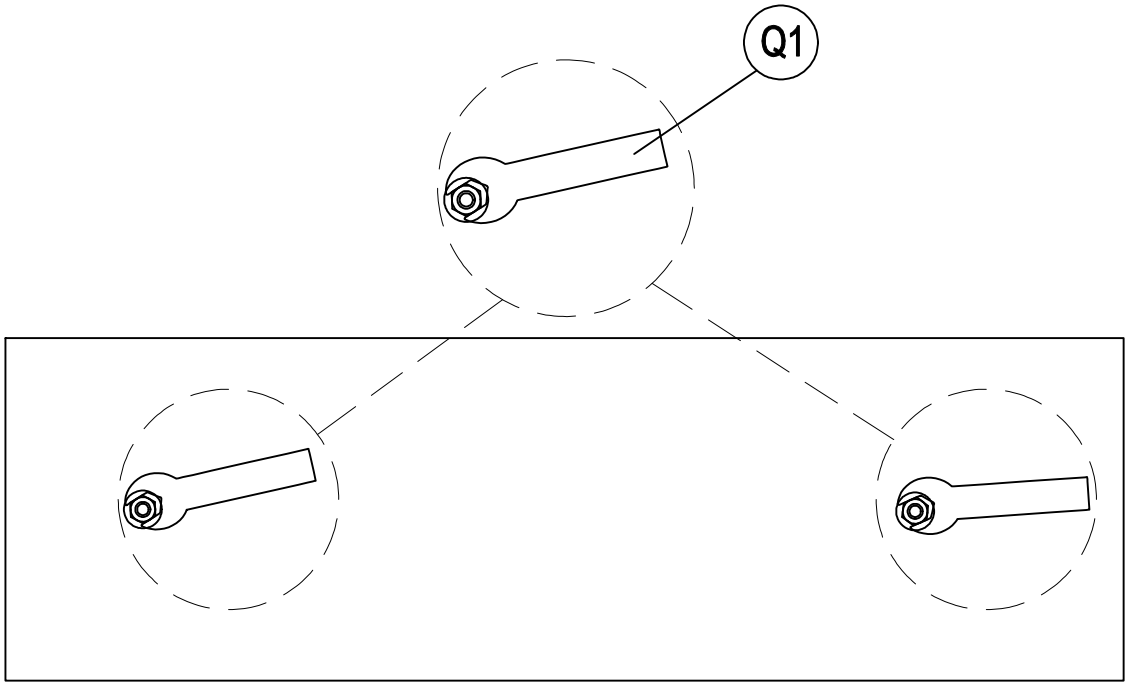


Use wrench Q1 to tighten the nut on the P1 anchor just arrived, then remove the nut and washer.

STEP 37

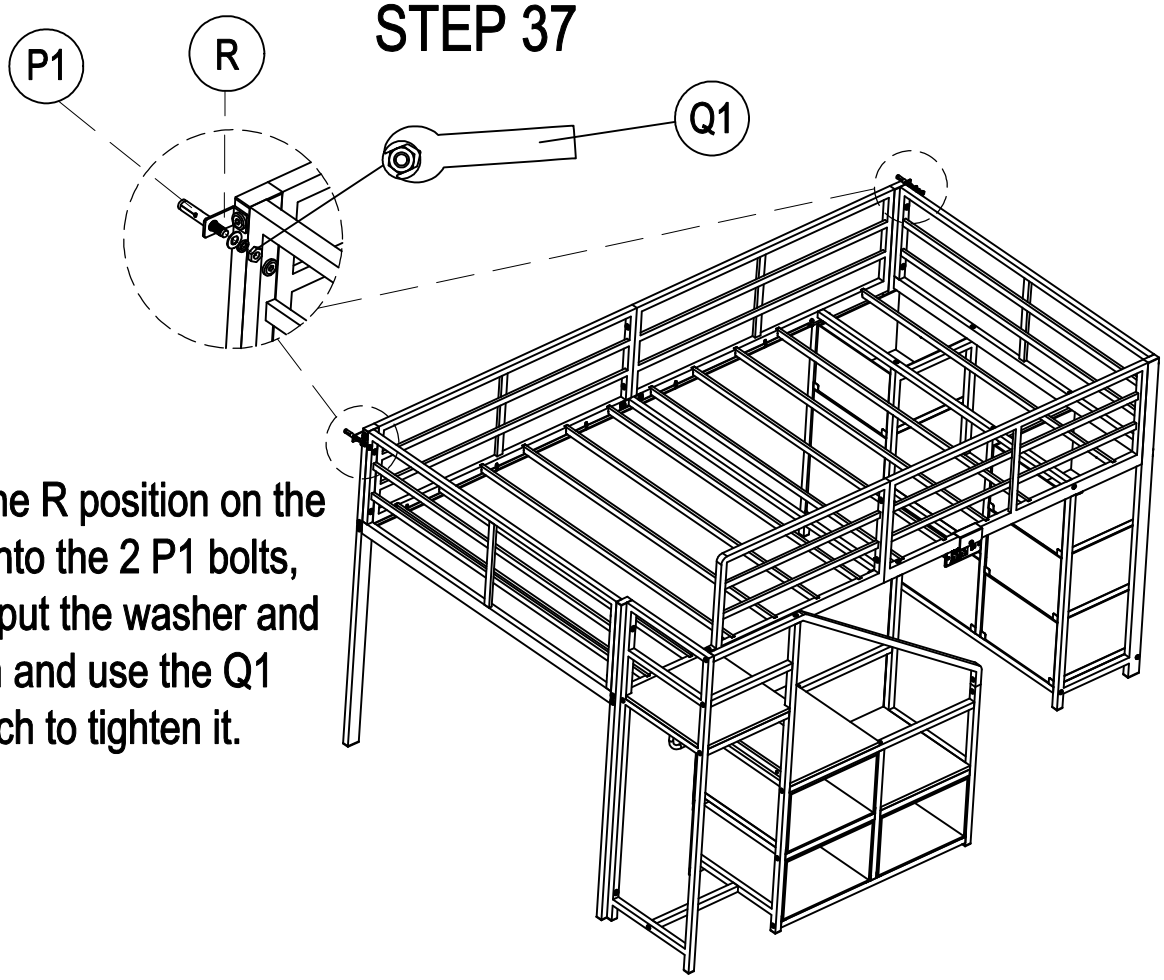


Put the R position on the bed into the 2 P1 bolts, then put the washer and nut in and use the Q1 wrench to tighten it.

STEP 38

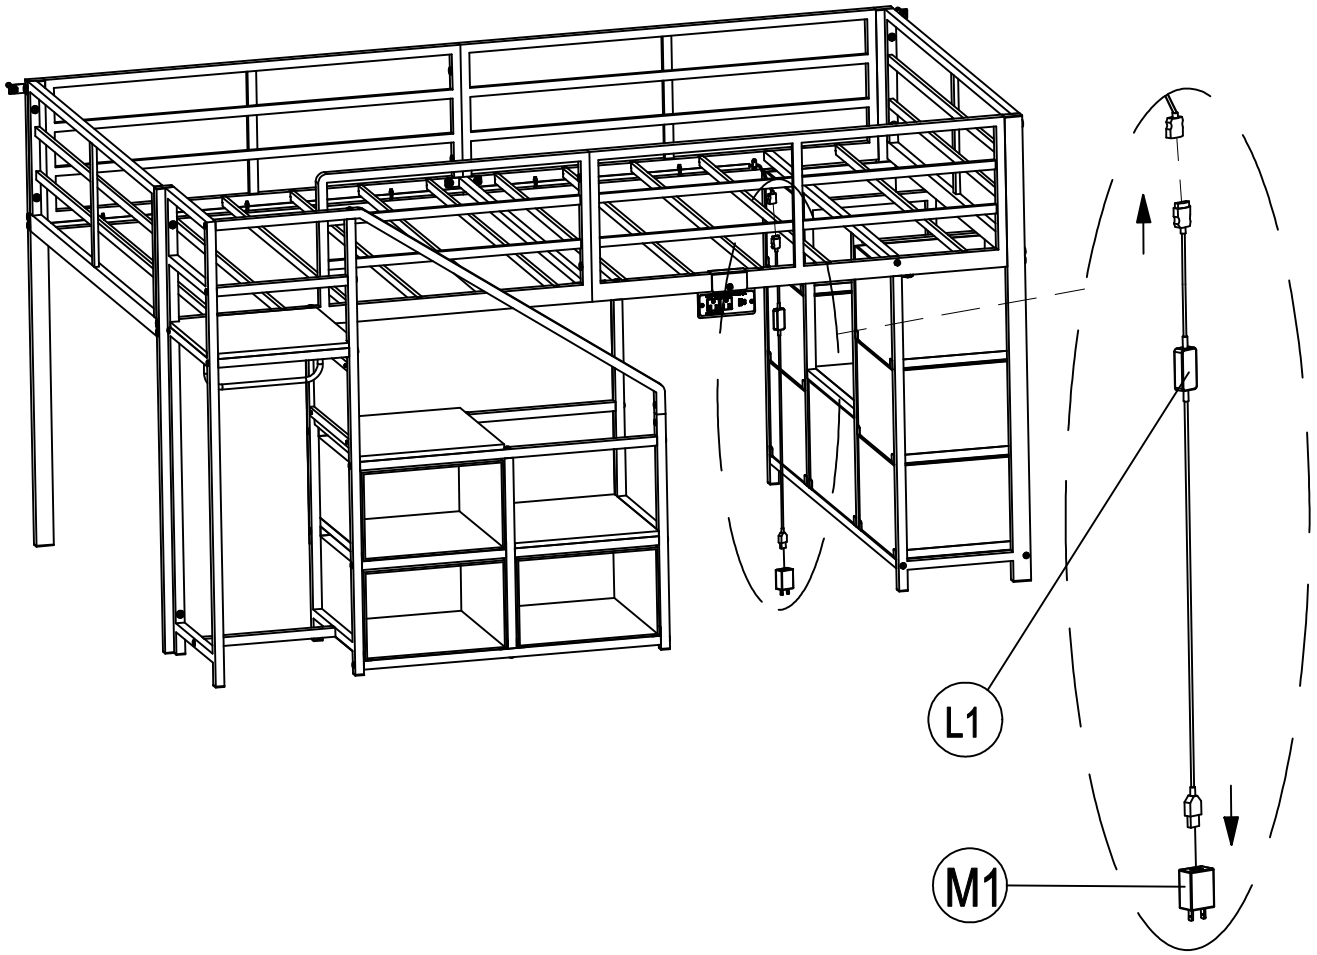

RGB LED CONTROLLER

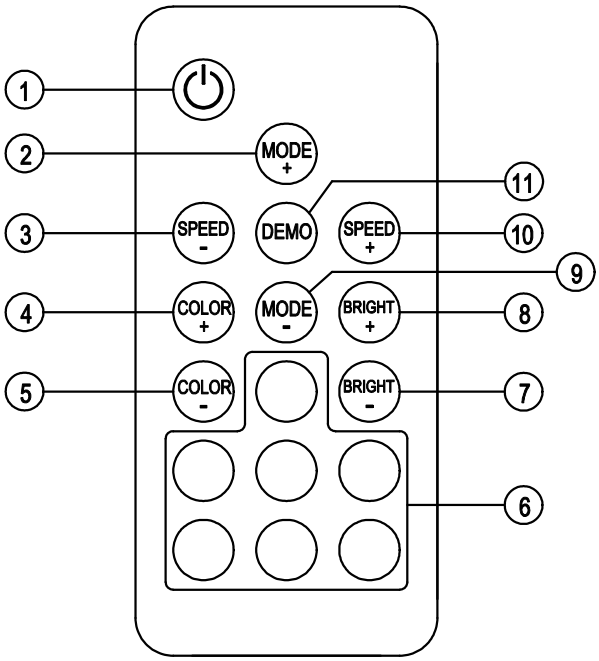

1. Turn on / Standby

Press this key to turn on unit or switch to standby mode. At power on, unit will automaticly turn on and restore to previous status.

2/9. Dynamic Mode Adjust

Switch to dynamic mode from static color, or switch between dynamic modes.

3/10. Dynamic Speed Adjust

Adjust dynamic playing speed. Press SPEED + to increase speed and press SPEED - to decrease.
Unit will switch to dynamic mode If press this key at static color mode.

4/5. Static Color Adjust

Switch to static color mode from dynamic mode, or switch between static colors.

6. Direct Color Select

Shortcut key to static colors. When press the specific color key, LED will play the same static color.
The direct colors are included in 'COLOR +' and 'COLOR -' operation.

7/8. Brightness Adjust

Adjust static color brightness. Press BRIGHGT + to increase brightness and press BRIGHGT - to decrease.
Unit will switch to static color mode If press this key at dynamic mode.

11. Demo Mode

Press this key will switch to Demo mode. At demo mode, it plays 17 dynamic modes in loop, each mode repeat 3 times.