

60 Inch Ceiling Fan

(Brushed Nickel)

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____




Product Information

Finish	Brushed Nickel
Blade Finish	Silver

Specifications

Number of Blades	3
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	3 Speed Wall Control Full Function
Remote Included	No
Wall Control Included	Yes
Low Ceiling Adaptable	Yes, With Optional Flush Mount
Lead Wire Length	78.00"
Motor Size	188 MM X 25 MM
Motor Type	AC

Dimensions

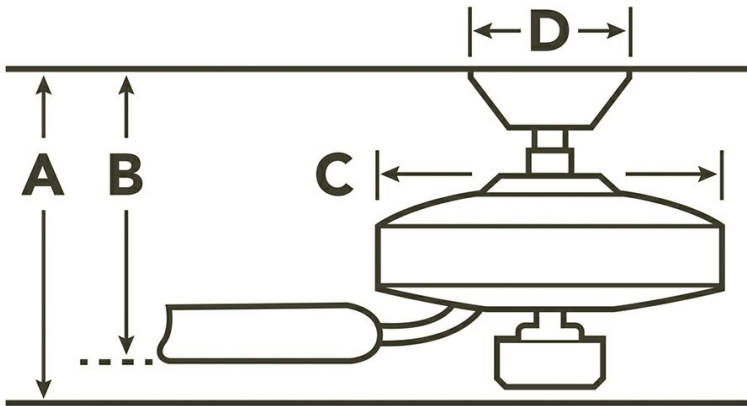

Downrod	A	B	C	D
1.00 OD X 4.50	17.75	14.00	7.75	7.75

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
# of Bulbs/LED Modules	1
Watts	77/26
Initial Lumens	1600
Glass Description	Clear Painted White Polycarbonate
Optional Light Kit Available	No
Kelvin Temperature	3000K
Color Rendering Index	80

Safety Listings & Certifications

Safety Rated	Dry
--------------	-----

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2

Installation

The electrical junction box

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

60 Inch Ceiling Fan

(Brushed Nickel)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Brushed Nickel	CLEAR PAINTED WHITE POLYCARBONATE	SILVER
Polished Nickel	CLEAR PAINTED WHITE POLYCARBONATE	BLACK
White	CLEAR PAINTED WHITE POLYCARBONATE	SILVER

Installation requirements and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

Electrical Requirements 120v 60Hz ac

Minimum Distance Between Bottom Of Fan Blade To Floor 7 feet

Notes:

1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.