



SPEC SHEET

KoolMore 72 In. Commercial Back Bar Cooler in Stainless Steel With Side Condenser and LED Lighting, 18 Cu. Ft

Model: KM-BC-3GD-SCSS

FEATURES

- Spacious 18.3 Cu. Ft. Capacity: Holds up to 570 standard 12 oz. cans, ideal for bars, restaurants, and catering.
- Tempered Low-E Glass Doors: Three swing-style doors with insulation and clear visibility, energy-efficient.
- Efficient Cooling Performance: Maintains 32°F to 50°F with eco-friendly refrigerant, operates up to 100°F ambient.
- Customizable Storage Solutions: Six adjustable metal shelves (64 lbs each) for flexible organization.
- Bright LED Interior Lighting: 6000K–7000K white LEDs at the top for enhanced visibility.
- Durable Construction: Aluminum interior, precoated steel, and stainless-steel exterior for longevity.
- User-Friendly Digital Controls: Digital thermostat for precise temperature adjustments.
- Narrow Design with Side-Mounted Compressor: 24-inch depth, space-saving with effective cooling.
- ETL Certified & Warranty: Meets ETL standards, 1-year parts and labor warranty.



CLOSE UP IMAGES



TECHNICAL SPECS

Dimensions

Height	34
Width	25
Length	71.9
Interior Height	29.17
Interior Width	55.75
Interior Depth	19.96
Depth Less Door	21.98
Depth With Door Open 90 Degrees	39.85
Depth Including Handles	25
Depth Excluding Handles	24
Minimum Back Air Clearance In	4 in.
Minimum Side Air Clearance In	4 in.
Weight lbs	231
Power Cord Length	97.5

Capacity

Gross Cubic Feet	18.3
Net Cubic Feet	17.5
Individual Shelf Capacity	63.8 lbs


Features & Materials

Color Finish	Stainless-Steel
Color Door Handles	Aluminum
Defrost Type	Automatic
Refrigerant Type	R-600a
Door Style	Swing
Number Of Doors	3
Compressor Location	Bottom Right
Temperature Range	32-50 F
Ambient Temperature Range	100 F
Exterior Material	Stainless-Steel
Interior Material	Stainless-Steel
Door Material	Aluminum
Shelf Material Type	Metal and PVC
Interior Lights	LED
Interior Lights Color	White
Control Type	Digital

Electric & Certifications

Horsepower	0.16
Noise	65 dB
Amps	2.6
Hertz	60
Phase	1
Voltage	115
Wattage	290
Plug Type	NEMA 5-15P
Certifications	ETL Listed for Safety and Sanitation

Plan View

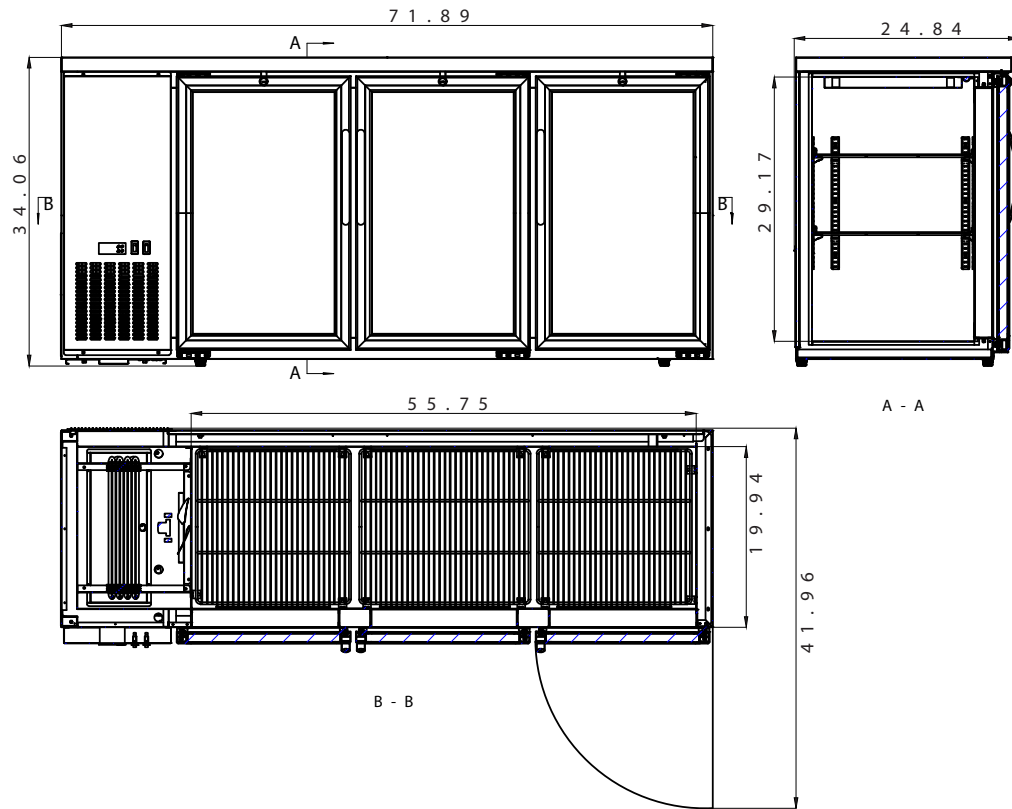

CERTIFICATIONS



706 Eastern Parkway STE 1G, Brooklyn NY 11213
718-576-6342
info@koolmore.com