













# Installation

Hardware List		Hardware List	
 Table top	1	 Table leg	3
	1	 Central junction ring	1
 Bottom metal ring	1	 8x40mm screws	12
 8x35mm screws	6	 8x16mm screws	4
 Hexagonal screw tap	1	 Foot pad	5


1



2

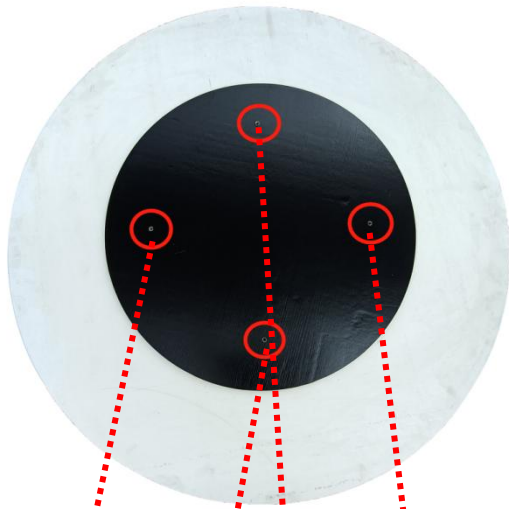

8x16mm screw  
and washer

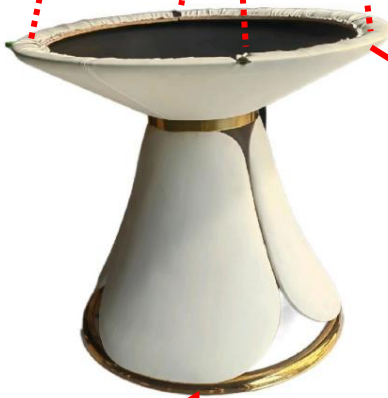

Adjustable foot pads at the bottom of the support legs (when the ground is uneven, the foot pads can be used to adjust the balance)

Put the table top on the table leg, make sure the reserved screw holes of the table top and the frame are corresponding, tighten 8x16mm screws from the bottom to finish the installation.

