

Assembly Instructions



ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For some products, two persons are recommended.

EASY  DIFFICULT

The image shows five circles in a row. The first three are solid black, and the last two are white with a black outline. Each circle contains a small hexagon in the center, representing an Allen wrench hole.

Tools Required For Assembly:

Allen Wrench



(Included)

Thank you for your purchase!


We hope you will enjoy your new product for many years to come. Our commitment to providing quality products does not simply end when a purchase is made. We stand behind our products and will provide any support needed in order for you to fully enjoy your purchase. Your satisfaction is the greatest recognition we could have.

Because we value your trust in our company, we will do our best to meet your service expectations. Should you have any assembly related questions, parts replacement requests, comments or suggestions, please feel free to contact us any time. To help expedite the service, please have the assembly instructions available, along with your order receipt.

ASSEMBLY & CARE ADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY. PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.


BASIC ASSEMBLY TECHNIQUES

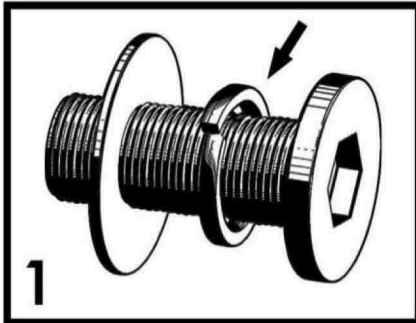


When lock or spring washer is used in an assembly, please make sure the lock or spring washer is placed between the larger flat washer and the head of the screw or bolt.




Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.

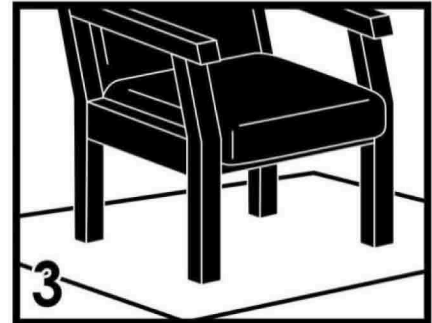


Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.

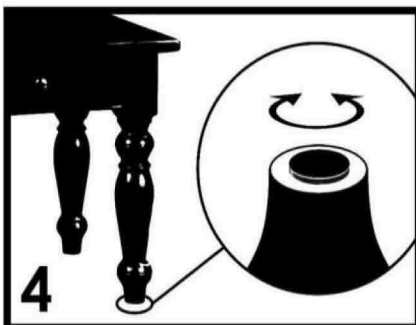

Some furniture comes with height adjustment knobs underneath each leg. To lower or to raise each leg, you need to turn clockwise or counterclockwise, respectively.

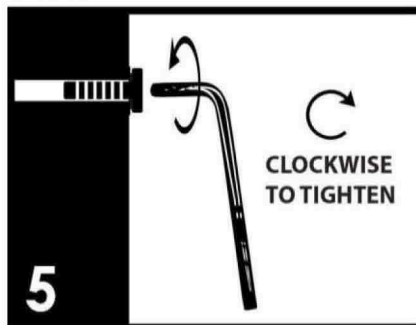

Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.

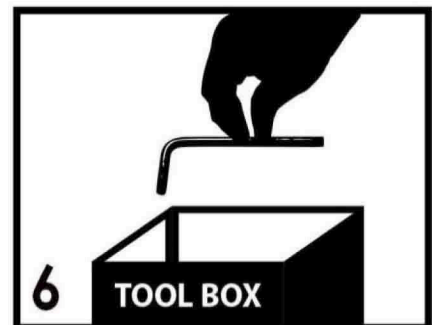


Save the instructions and store the Allen wrench or any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.










FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.










Before you begin, please read Page 2 of "Assembly and Care Advice".

And remember, do not tighten until each step is completed or instructed.

Parts List

	#1X1PC BACK
	#2X1PC CUSHION
	#3X2PCS ARMREST
	#4X1PC 5-STAR BASE
	#5X1PC SEAT PLATE W/HANDLE
	#6X1PC GAS LIFT CYLINDER
	#7X5PCS CASTER


Hardware List

	#AX4PCS BOLT M8*60MM
	#BX6PCS BOLT M6*30MM
	#CX2PCS BOLT M6*20MM
	#DX8PCS FLAT WASHER M6*18*1.2MM
	#EX4PCS COVER
	#FX1PC ALLEN WRENCH M6
	#GX1PC ALLEN WRENCH M8





1. Insert the casters (#7) into the holes along the ends of the 5 star base (#4).

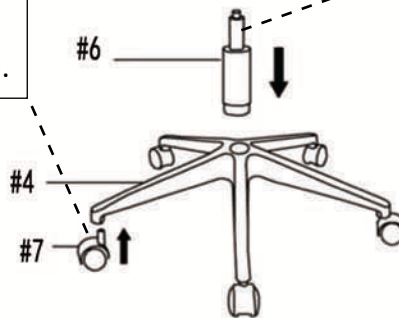


2. Insert the gas lift cylinder (#6) into the center hole along the 5 star base (#4).



#B 2 pcs
#C 2 pcs
#D 4 pcs
#F 1 pc

1. Prepare 2 bolt assemblies by inserting a flat washer (#D) onto the bolts (#B). Prepare 2 bolt assemblies by inserting a flat washer (#D) onto the bolts (#C).


2. Align the seat plate w/handle (#5) to the holes along the bottom of the cushion (#2), then insert the bolt assemblies (#B) to the front holes and the bolts (#A) to the rear holes, secure.

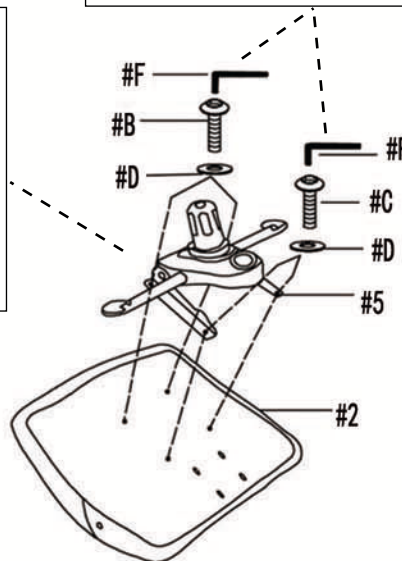



#B 4 pcs
#D 4 pcs
#F 1 pc

1. Prepare 4 bolt assemblies by inserting a flat washer (#D) onto the bolts (#B).

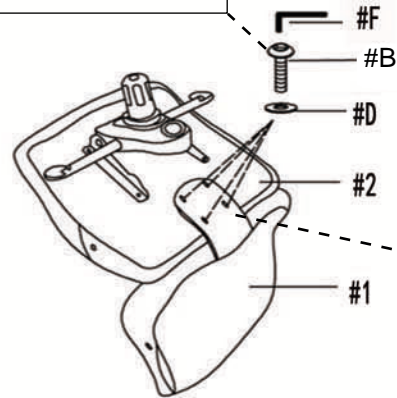

2. Align the back (#1) to the cushion (#2), then insert a bolt into each hole and secure using the Allen wrench (#F).




Place the cushion (#2) onto the gas lift cylinder (#5).



#A 4 pcs

#E 4 pcs

Align the armrests (#3) to the holes along the side, then insert a bolt (#A) into each end. Secure using the Allen wrench (#G). Place a cover (#E) onto each bolt.

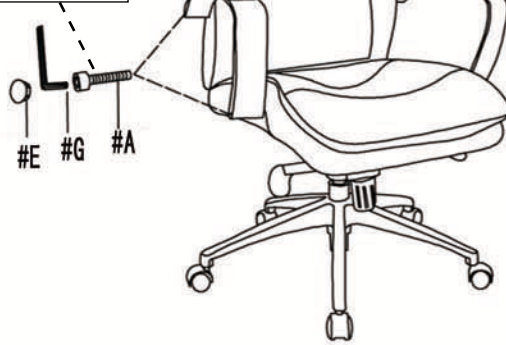

ASSEMBLY IS COMPLETED