



# 1. Single layer installation

1. Chassis Connection The side with edge is on the top, and the base without edge is on the bottom.

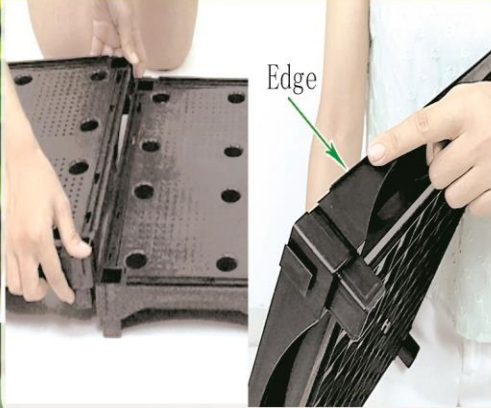


2. Connect the base with the upper water pipe, One is connected to drain, and the rest is blocked with water valve.

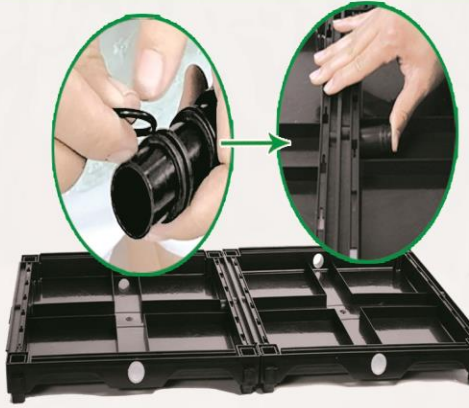

3. The inner side panel should be pressed with a strip to prevent water leakage, No banding around, Note that the head of the pressing strip must be pushed to the head of the clamping slot of the base.



4. Side Guards Press one side of the convex groove of the side plate into the groove of the base and insert it, Push from A to B.

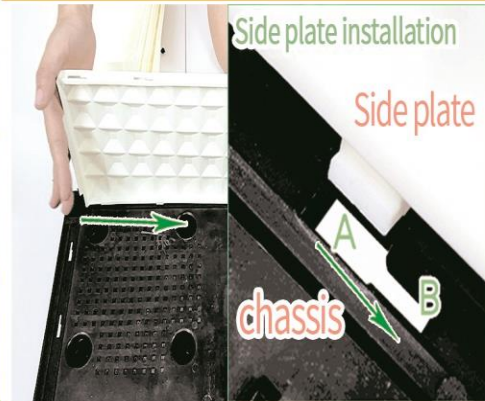

5. Column Installation Connect the column in the middle first Insert the side panel again.



6. Strip Installation Pay attention to the length of the two ends of the layering, The groove of the side panel needs to be adapted to fit to hold it well.



# 2. Deepen installation

7. Deepen Installation, Press one side of the convex groove of the side plate into the groove of the base and insert it, Slide to one side.



8. Column Installation Pay attention to the side with groove inward to facilitate the installation of reinforcement bar at the back



9. Reinforcement bar installation (Only for single row deepening)



