



## Triton® | K-8040-2A

Shelf-back commercial bathroom sink faucet with pop-up drain and standard handles

### Features

- Valvet® valves
- Pop-up drain with lift rod and tailpiece
- Standard handles
- 1-1/4" (32 mm) spout
- Lower flow aerator options are available
- 2.0 gpm (7.6 lpm) maximum flow rate at 60 psi (4.14 bar)



## Codes/Standards

ASME A112.18.1/CSA B125.1  
 NSF/ANSI/CAN 372  
 NSF/ANSI/CAN 61  
 DOE - Energy Policy Act 1992  
 NSF/ANSI/CAN 61|NSF/ANSI/CAN 372

## Technical Information

*All product dimensions are nominal.*

### Handle

Handle Style/Type: Lever

### Spout

Spout Reach: 1-1/4" (32 mm)

### Flow Rate

Faucet Flow Rate: 2.2 gpm (8.3 l/min)

## Material

- Brass
- Brass valve bodies

## Recommended Products/Accessories

K-23726 Drain treatment


K-23723 Faucet cleaner

## Warranty

*See website for detailed warranty information.*

KOHLER® One-Year Limited Warranty



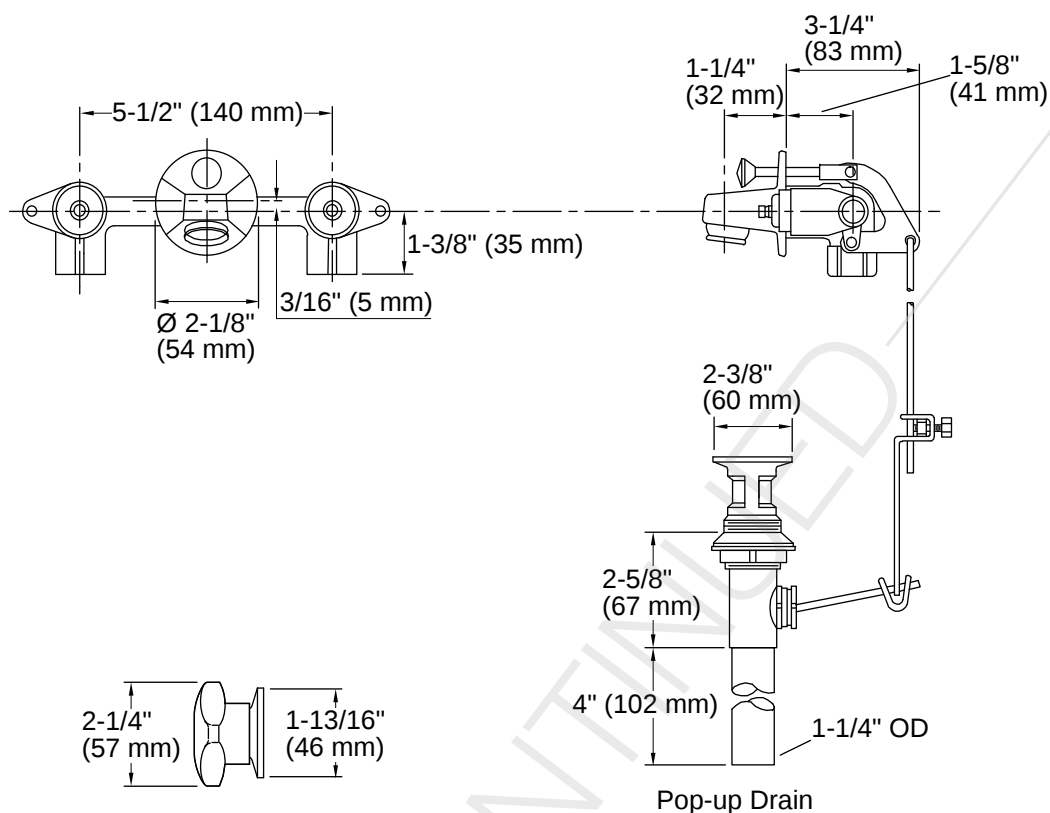

## Installation

- For 5-1/2" (140 mm) centers

## Installation Notes

*Install this product according to the installation instructions.*



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

7-29-2026 20:16 - US-CA