

PENDANT LIGHT ASSEMBLY INSTRUCTION

Thanks for purchasing our Light fixture. Please retain the package and its inner protective materials for one month or longer. Read user manual before installation and keep it for future reference. If you have any questions, contact us.

WARRANTY

These instructions are suggested installation procedures only. Please be reminded that we assume no liabilities occurred from improper installation. All of our products are warranted against defects in materials and workmanship for a period of one year from the date of purchasing. We provide 1 month hassle-free full refund, 6 month money back or free replacement and 12 month limited warranty.

WARNING (To reduce the risk of fire, electric shock, or injury to persons)

- We suggest installation by a licensed electrician.
- Before you start, NEVER attempt any work without shutting off the electricity until the work is done.
- Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
- Make sure that the ceiling or wall can stand the weight of the lamp before assembling.
- Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
- Shut off electricity before replacing bulb.
- Do not touch the bulb or lamp shade when the lighting fixture is working.
- The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

CLEANING

- To clean, wipe fixture with a soft cloth.
- Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

SPECIFICATION

VOLTAGE	120V
WATTAGE	Max.60W
POWER SOURCE	Hardwired


BULB BASE	E26 Medium
NUMBER OF LIGHTS	1

ACCESSORIES INCLUDED

Wire Connectors*3pcs



Mounting Screw*2pcs




INSTALLATION PROCEDURES

- Open the package and take out all the parts or accessories. Then place them on a clean flat surface.
- Please turn off the power first.
- Screw and tighten 'tube 9' on 'nipple 10'.
- Screw and tighten 'tube 8' on 'tube 9'.
- Screw and tighten 'tube 7' on 'tube 8'. Then screw and tighten the remaining 2pcs 'tube 7' one by one, and secure the connected tubes with 'canopy 5'.
- Thread 'mounting screws 1' into the matching holes of 'mounting plate 2'. Secure 'mounting plate 2' to outlet box with 'outlet box screws 4'.
- Connect light fixture's wires with the outlet box's wires correctly and firmly by using 'wire connector 3' (You can cover insulating tape to the connecting areas for higher safety).

Wire Connecting Detailed Steps:

- Identify the light fixture's live wire and neutral wire by L and N label(L means live wire. N means neutral wire).
- Attach outlet live wire to the fixture live wire by using a wire connector.
- Attach outlet neutral wire to the fixture neutral wire by using a connector.
- Wrap the outlet copper wire around the ground screw on 'mounting plate 2'. Then tighten the ground screw.
- Connect outlet copper ground wire to the fixture copper ground wire by using a wire connector and place all wires inside the outlet box.

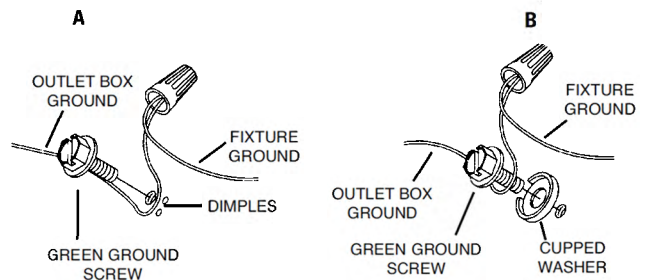

- Raise 'canopy 5', allowing the 'mounting screws 1' to protrude through the holes on 'canopy 5', then secure it to the ceiling with 'cap nuts 6'.

- Place 'lampshade 11' over socket, and secure it with 'retaining ring 15'.
- Screw and install 'E26 bulb 16'. (Please do not exceed the maximum capacity recommended on the socket. Bulb not included)
- Place 'frosted glass 12' on 'decorative ring 14', and fix 'decorative ring 14' to the 'lampshade 11' with 'screws 13'.
- Restore the power and you can turn on the light.

