LACAVA



CIGNO
built-in thermostatic valve
with 3-way diverter
15TH3.L.R

Specifications:

Installation:	built-in wall mount
Exterior Dimensions:	Ø 7 1/4”
Material:	solid brass construction with thermostatic cartridge and diverter ceramic cartridge with 3-way out
Water use:	6.1 GPM (43.5 PSI)
Finishes:	CR - polished chrome PN - polished nickel NI - brushed nickel BG - brushed gold 44 - matte black
Fittings included:	rough-in # VTH3 and trim # 15TH3.L.R-A

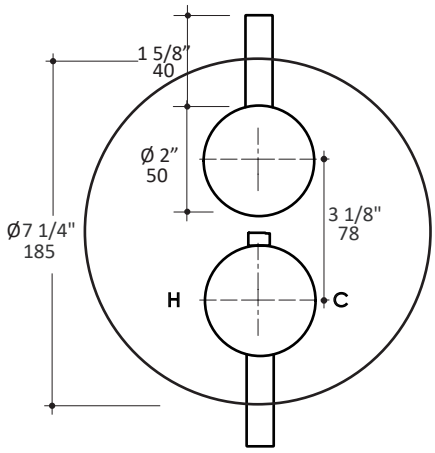

Features:

- thermostatic valve with 3-way diverter and OFF function
- round backplate
- lever handles
- 3/4” NPT water IN and 1/2” NPT OUT connections
- anti-scald protection & temperature regulation
- water temperature set to 100°F
- screwdriver service stops
- finished wall must be flush with mudguard as marked
- 1 1/8” extension kit available

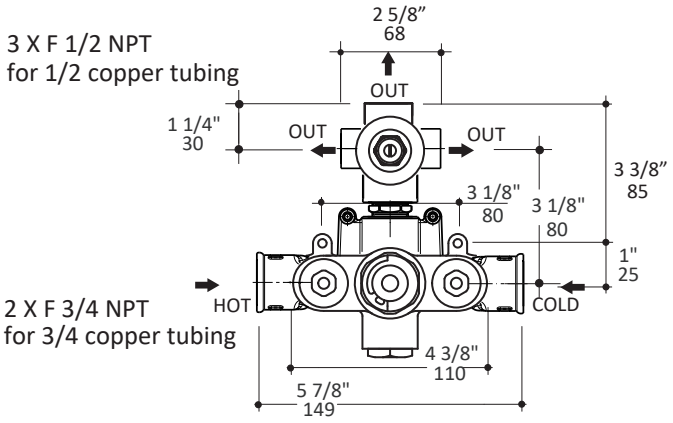

Codes + Standards:

- Meets and exceeds applicable national codes and standards
- CAL-Green compliant

ADA compliant when installed to specific requirements of this regulation

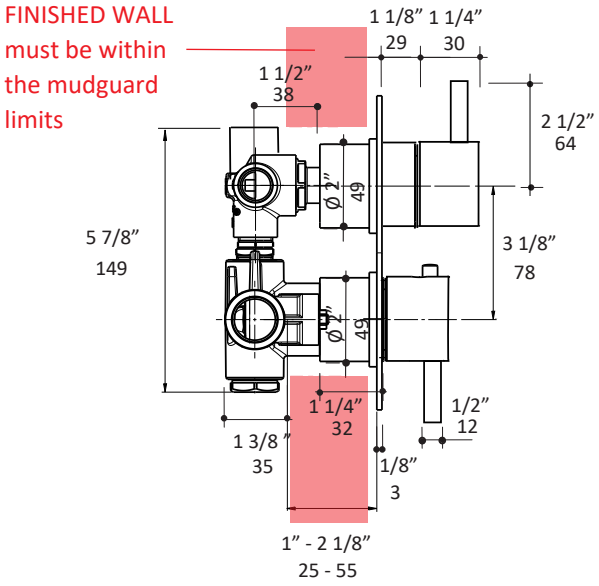

Recommended Items:

- Replacement parts:
  - VTH3 rough-in with 3-way diverter
  - 15TH3.L.R-A trim
  - VTH0-CT thermostatic cartridge
  - VTH3-C diverter ceramic cartridge with 3-way out
  - VTH3-EX 1 1/8” extension kit