

LAVA^{lite}

56,000btu's

PRODUCT features

- Power Rating: 56,000 BTU
- Coverage Area: Approximately 25 sq. ft
- Consumption Rate: Up to 10 hours with Propane Tank (LP)
- 5 Year Limited Warranty
- Construction: Solid Steel & Aluminum
- Safety Features: Tilt Switch Auto-Shutoff

HEAT radius



FUEL type



PROPANE



NATURAL GAS

IGNITION type



BATTERY OPERATED




PUSH-TO-START



PRODUCTfeatures

- Power Rating: 56,000 BTU
- Coverage Area: Approximately 25 sq. ft
- Consumption Rate: Up to 10 hours with Propane Tank (LP)
- 5 Year Limited Warranty
- Construction: Solid Steel & Aluminum
- Safety Features: Tilt Switch Auto-Shutoff

HEATradius

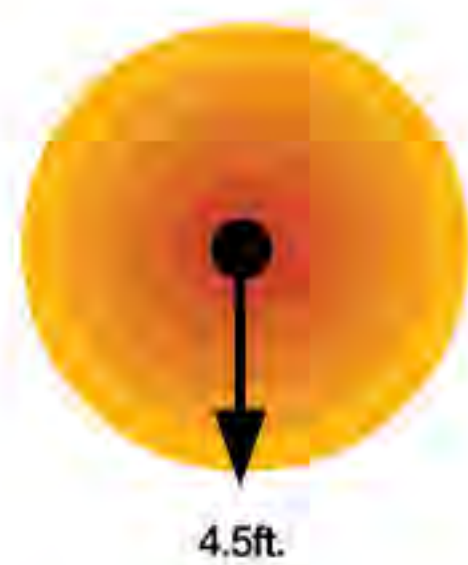

FUELtype



IGNITIONtype



PRODUCTmaterials

- Stainless Steel
- Aluminum
- Plastic
- Borosilicate Glass

INSTALLATIONinstructions

- Assembled
- Clearance Requirements:
24 in. (60.96 cm)(H) 36 in. (91.44 cm)(V)

PRODUCTcodes/standards

- ANS 283.26-2014
- CSA 2.37-2014


SHIPPINGdetails



COLORoptions



LAVA^{lite}
56,000btu's

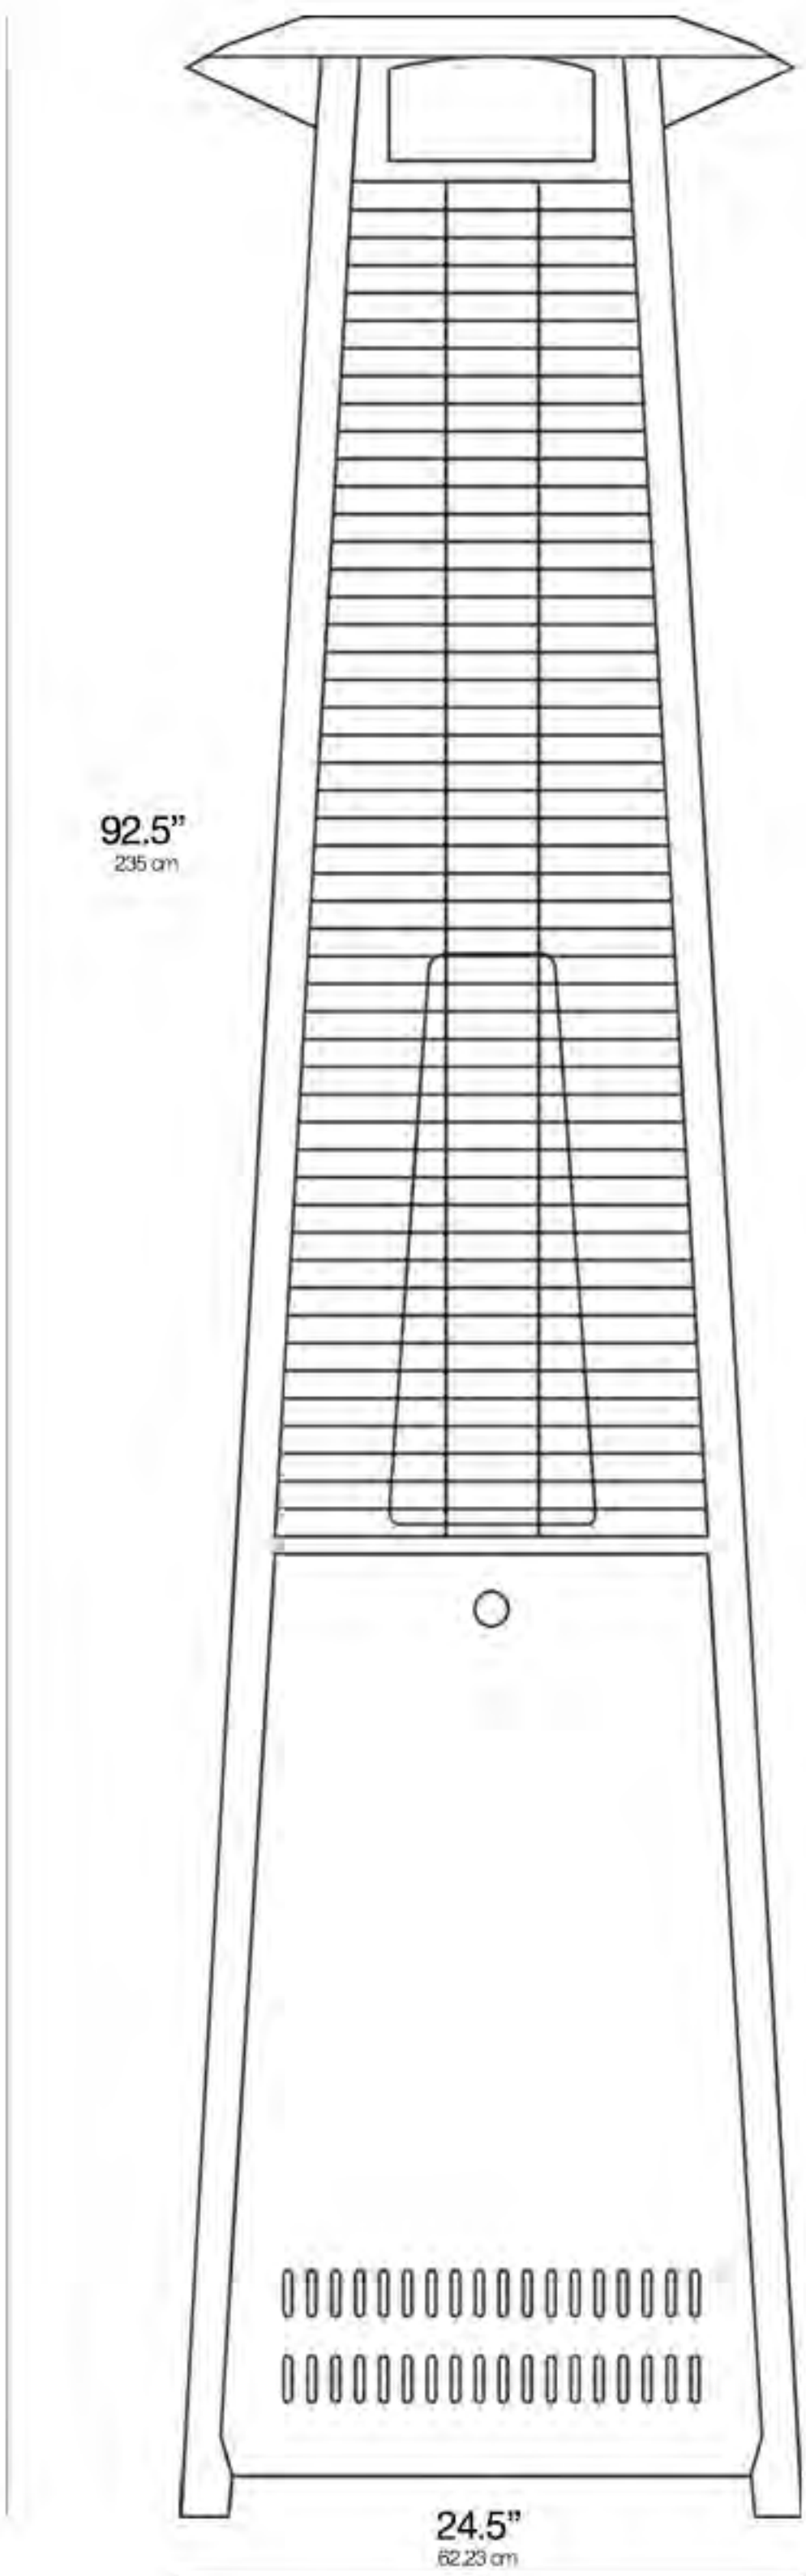

PRODUCTspecifications

Certification	CSA
Height	92.5 in. (2.35 m)
Width (Diameter)	24.5 in (62.23 cm)
Weight	72.6 lbs. (32.93 kg)
Rated Heat Input	56,000 BTU/hr
Fuel	LP
Gas Supply	20 lbs. (9 kg) LP gas cylinder
Manifold	11' W.C. (28 cm)
Diameter of Injector	0.077 in. (1.9 mm)
Safety Features	Flame failure device, anit-tilt switch
Gas Supply Pressure	Max. 250 PSI, min. 5 PSI

OPTIONALaccessories

- AL8MPSCVR all-weather cover
- AL8MPSGLS borosilicate glass tube
- AL8MPSWHL whee- kit

PRODUCTwarranty

- 5.3.1 Commercial/Residentail
- see website for details:
<http://lavaheat.com/warranty-and-product-care/>

FINISHoptions

