Parts:

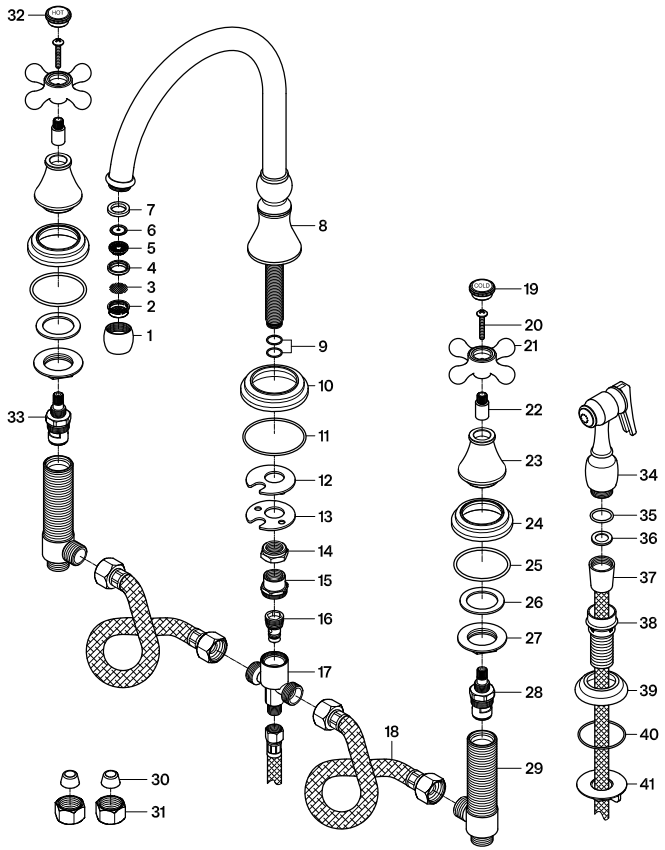

Replacement Parts:



Hot Cartridge: KSRPL2000HC



Cold Cartridge: KSRPL2000CC



Hot Handle: KBH1791AXH



Cold Handle: KBH1791AXC

KINGSTON

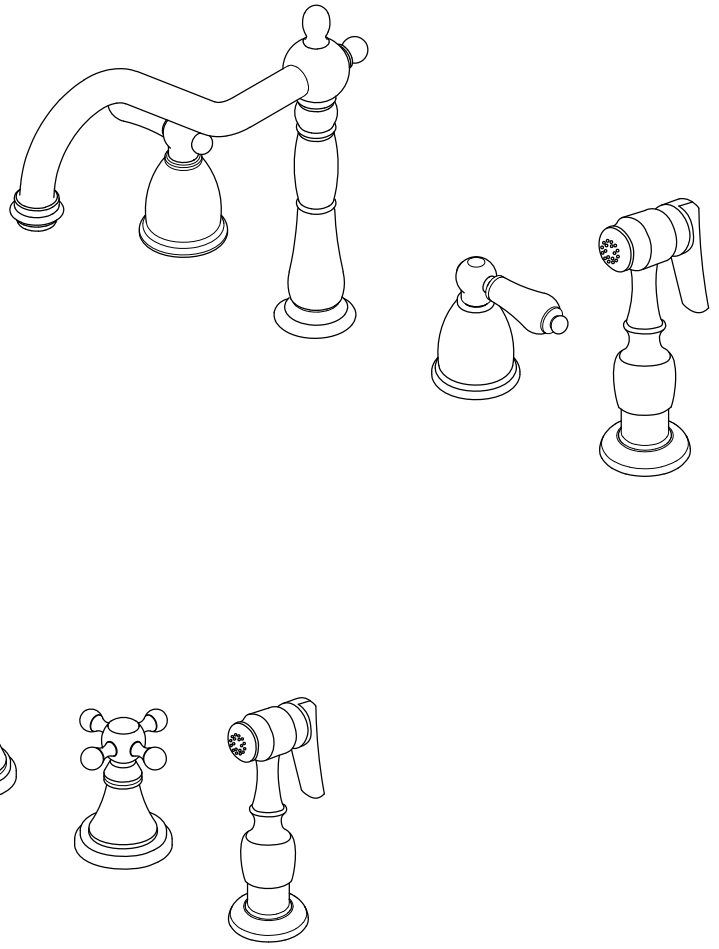

CARE AND MAINTENANCE OF YOUR FAUCET

Your KINGSTON faucet has been finished to the most strict standards; however, due to the high content of minerals in the water, your finish may appear dull and tarnished after time. These are some do's and don'ts to maintain the luster on your faucet for many years to come.

DO
1. Use a silicone based caulking when installing.
2. Clean your faucet with only a mild soap and water solution.
3. Dry your faucet after using it.
4. Give it a coat of Carnauba Wax periodically.

DON'T
1. Use plumbers putty when installing the faucet.
2. Use any abrasive cleaning agents.

It may seem like a very simple and short list but it is that simple to maintain your faucet, looking shiny and new.

If your faucet is already looking somewhat dull and tarnished, before replacing it, try cleaning it with a 50/50 solution of vinegar and water, you may need to soak some rags and wrap around those stubborn areas, leave
overnight and rinse completely in the morning, apply Carnauba wax once you have removed the mineral deposits.

Parts:

Washer & Lock Nut	Cone Washer & Coupling Nut
	
2 Pcs	2 Pcs

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710

NOTICE

Failure to follow all directions may cause leaks which may result in water damage

KINGSTON

INSTALLATION INSTRUCTIONS
Widespread Kitchen Faucet with or without Sprayer

BEFORE BEGINNING INSTALLATION:

1. Flush plumbing lines to clear any debris.
2. Shut off both supply lines after flushing.

Need Tools:

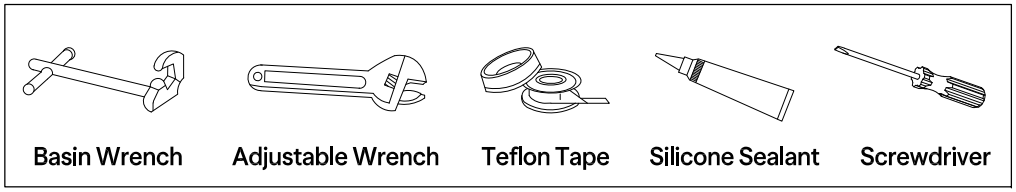

1

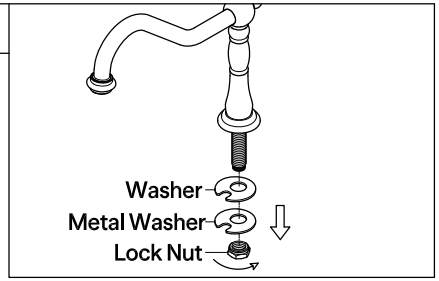

1. Remove the spout mounting hardware from spout .

2

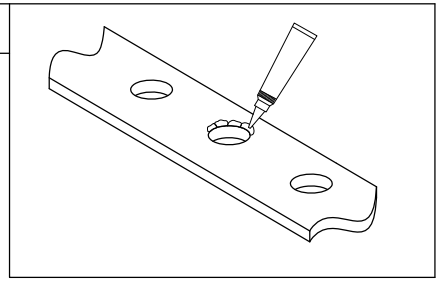

2. Sparingly apply a small bead of silicone caulking around the center hole on top of the sink (do not use Plumber's Putty as it may damage finish and void warranty).

3

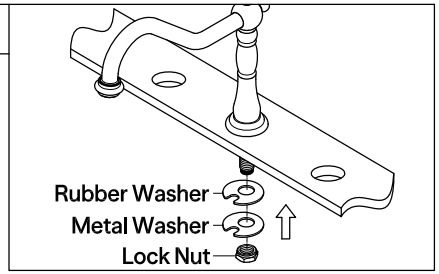

3. From the top of the sink insert the spout base ring (if applicable) and spout through the center hole. Slip the spout mounting hardware back onto the spout, hand tighten lock nut. Insert the pop-up rod through the hole in the back or top of the spout. (See pop-up installation below). Rotate the notched metal washer, to ensure smooth movement of the pop-up rod. Tighten the brass lock nut, test pop-up rod for ease of operation.

4

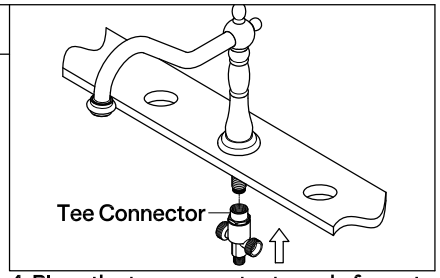

4. Place the tee connector to end of spout and thread tee connector onto spout shank.

5

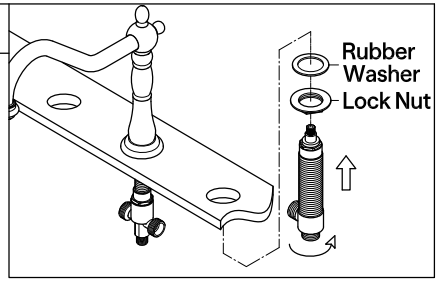

5. Hot and Cold Stem assemblies are easily Identifiable by a Red (Hot) or Blue (Cold) band, thread lock nut and insert rubber washer on stem assembly and insert stem assembly through side holes from below .

6

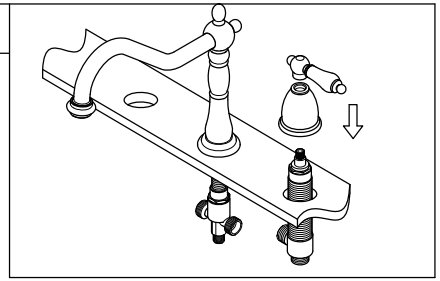

6. While holding the valve assembly from underneath the sink, thread the escutcheon onto the assembly from above. Install the handle, then secure it with the screw. Adjust the escutcheon height so the handle rotates without binding. Align the handles before tightening the bottom locknut. Notice: Do not overtighten, as this may cause leaks or water damage."

7

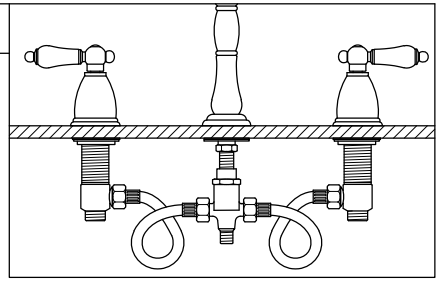

7. Attach flexible hoses to the outlet ports of the hot and cold valve assembly.
You may need to loop the hoses as shown in the graphic, and be careful not to overtighten.

8

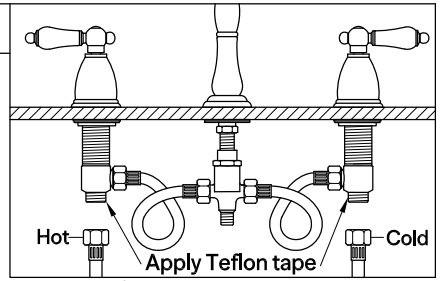

8. Apply Teflon tape on all male threads and Install inlet flexible lines (not included) to inlet port of stem assembly.

9

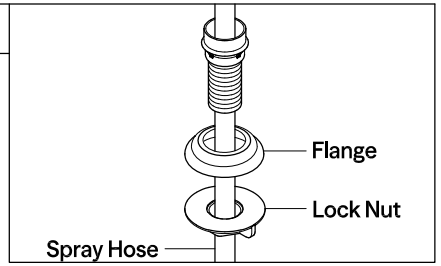

9. For models with side spray, insert spray guide through the fourth hole in the sink, thread lock nut into the shank and tighten firmly.

10

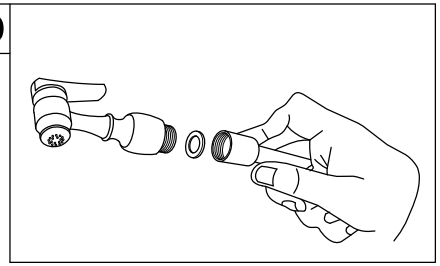

10. Once connections have been made turn on water supply and check for leaks.
Turn on hot and cold valves and let water run for 30 seconds or more, close valves.

11

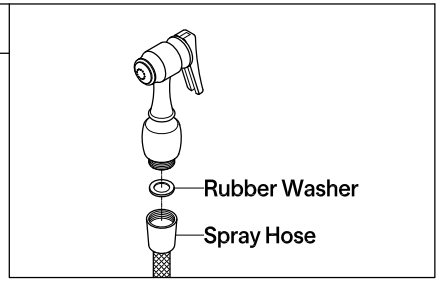

11. Place rubber washer to end of spray hose and attach sprayer.

12

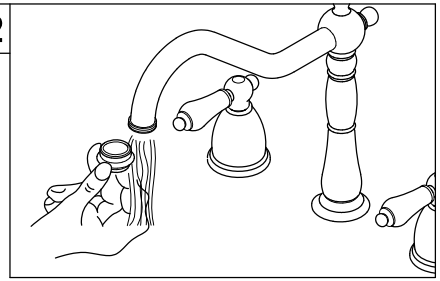

12. Remove the aerator and turn on the faucet. Let the water run for at least one minute to clear any debris from the line, then reinstall the aerator.

Warning!!!

- Do not over-tighten nut during installation.
- Over-tighten may crack the valve and cause severe leak.

©2025 LVC Kingston LLC. All Rights Reserved.
2026-10-GDi