


Assembly instructions

Ninja line





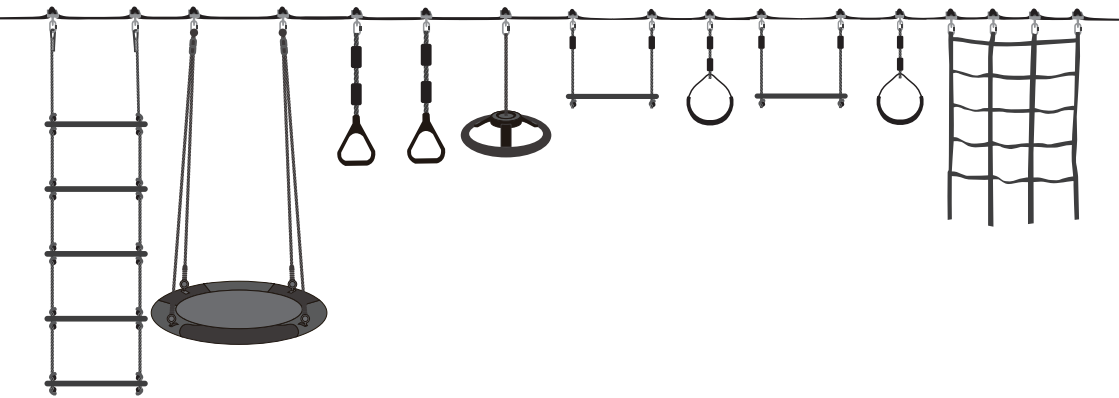

















😊 Keep this manual for future reference.

SAFETY INSTRUCTIONS :

- This product is not intended for public use. ONLY intended for domestic use.
- Not suitable for children below 5 years of age.
- Do not exceed maximum weight 250 LBS.
- Since children have different development patterns, we suggest that adult supervision be required.
- Inspect the strap before each use. Do not use when there is any abrasions, cuts, tears, burns, sew pattern damaged or alterations. If the strap is showing signs of wear, do not use, replace as necessary.

Parts List :


Quantity		
1		2in*50ft NinjaLine
1		Ratchet for NinjaLine
1		Rope ladder
2		Monkey bar
2		Triangle gymnastic ring
2		Round gymnastic ring
1		Ninja wheel
1		Climbing net
1		Swing seat
4		Tube with foam
2		suspension ropes and bolts
4		nut
4		Spacer
4		Nut cap
1		Spanner

17		Triangle clip
13		Carabiner
4		Triangle carabiner for net
2		Tree protector
1		Carrying bag


Trees Distance before install

- 50ft line ≠ 50ft trees distance


max.distance - 42ft
tree diameter 7-12in

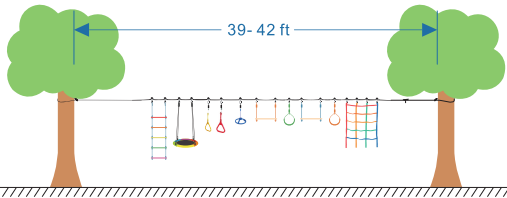

max.distance - 37ft
tree diameter 15-19in


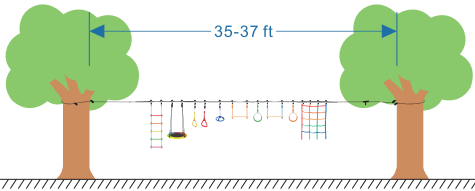


min.distance - 20ft
tree diameter 7-25in

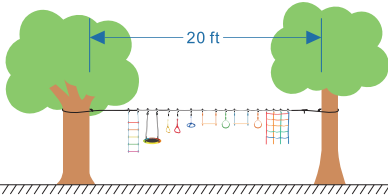


Assembly Instructions

1. Attach the strap to triangle clip, then move the triangle clip to the other end of the strap where there is a black mark.
Tips1. The distance of triangle clips can be adjusted depends on different environments and users.
Tips2. For safety reasons, we designed the triangle clip to be immovable, If you need to adjust its position, please pull the strap up from the buckle, as shown below, and then move it.)

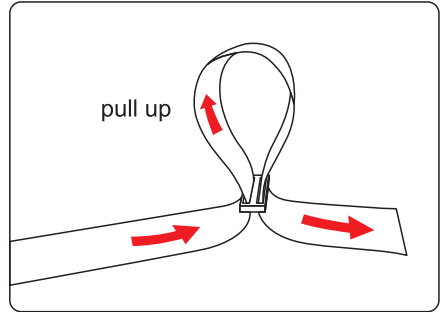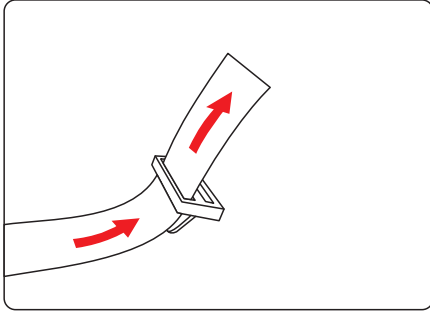


2. Use the same method to install the other 16 triangle clips. It is recommended that the distance between each triangle clip is 16in.


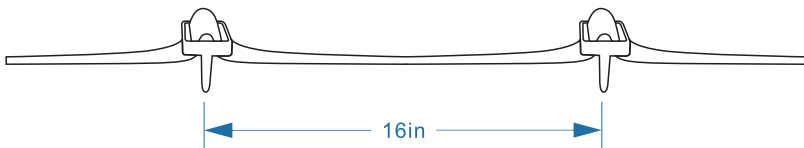


Note: you can measure the distance by the monkey bar


3. Wrap the cushion around the tree, fasten it, then set the **Ninjaline** height to around 12" above the users highest reach.

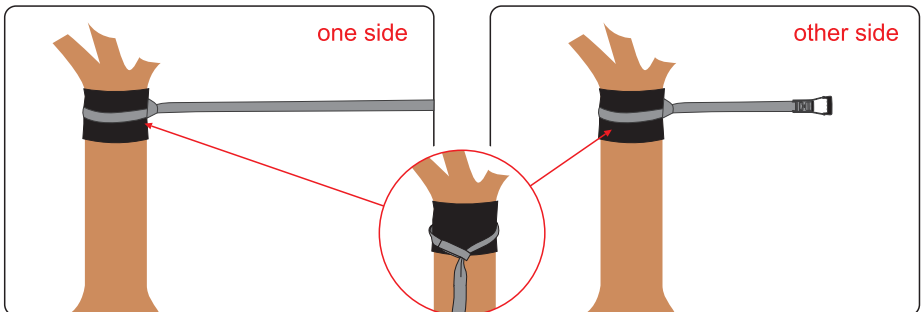


4. Thread the end of the ninja line(2in*50ft) through the slotted spool from bottom and straighten the line.

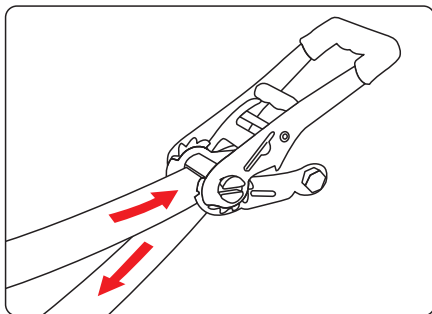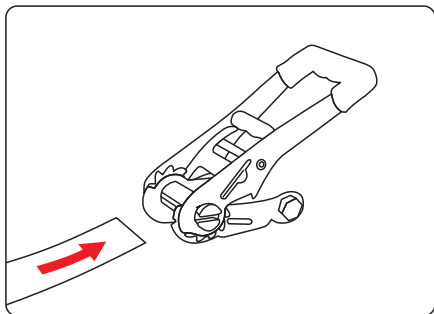


5. Pull the ratchet handle up and down until the line is tight. then close and lock the ratchet handle.

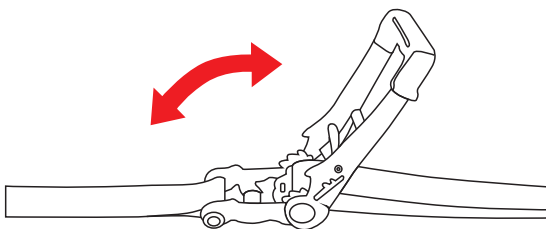


6. Ratchet teeth can damage the line. Keep the line and ratchet straight while cranking and do not over fill the ratchet with the line.

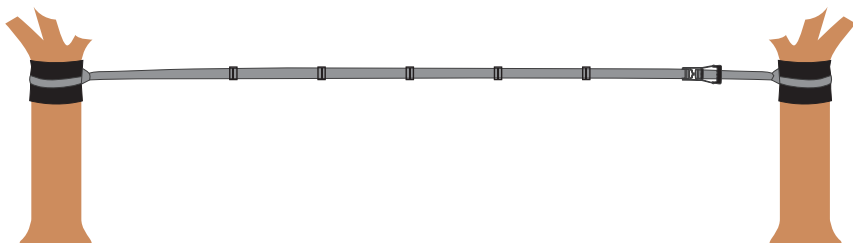

7. Hook the obstacles into the clip hole via carabiner, and secure the threaded lock nuts.

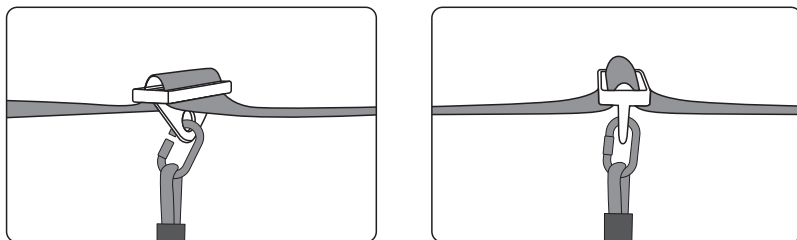

8. It is recommended to install the rope ladder on the left or right, as shown in the picture.

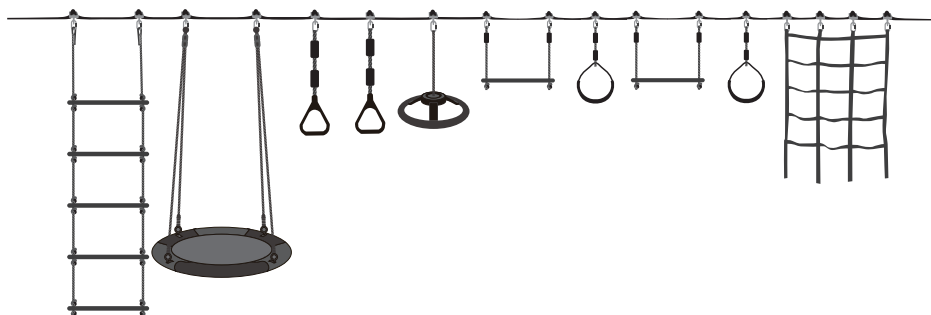

Swing Assembly Instruction

Tips: The actual color refers to the item you purchased.

Figure 1: Insert 4 tubes into the swing seat. (Attention: A bigger tube end is matched with a smaller one. If they are the same size, it is unable to connect them.)

Figure 2: Joint random two adjacent tubes.

Joint other two adjacent tubes then you will get two semi-circle tubes.

Figure 3: Connect left two joint and you will get a round swing seat.



Figure 1

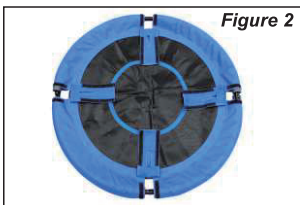


Figure 2

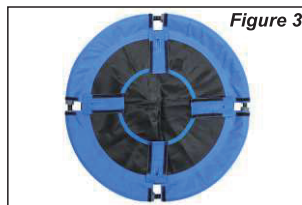


Figure 3

Figure 4:Cover it up with Hook&loop then insert the bolt into the hole at the joint.

Figure 5:Put the washer and nut onto the bolt,and tighten with a wrench until 3-4 thrdads of bolts are exposed,then put the nut cap onto the bolt and tighten it. Please make sure all the screws are tightened for your safety.(You need an open-end wrench to fasten nut and nut cap.)

Figure 6:Assembly complete.




Figure 4



Figure 5





Figure 6

Release The Line

1. Unlock the ratchet by pulling out the release lever firmly.

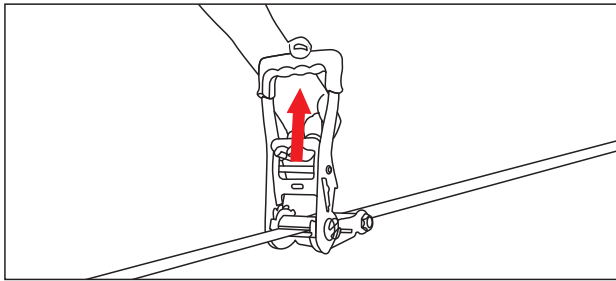

2. While holding the release lever in horizontal line, pull the ratchet all the way open until it is released, then pull the line out from the straightened end .

