


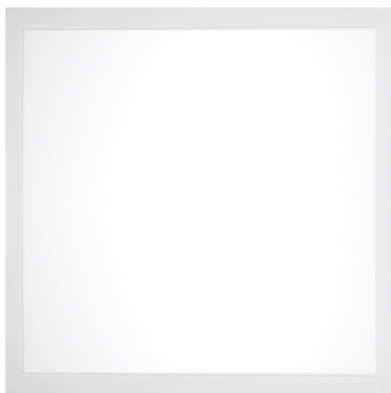

Project/Job Name:

Location:

Fixture Type:

Notes:

**65-571R1** - LED Backlit Flat Panel; 2 ft. x 2 ft.; Wattage and CCT Selectable; 100-277 Volt; ColorQuick Technology; PowerQuick Technology

- Wattage Selectable
- Flicker Free
- CCT Selectable
- IC Rated



## ELECTRICAL

|                            |                                 |
|----------------------------|---------------------------------|
| Technology:                | LED                             |
| Watts:                     | 20W/30W/40W                     |
| Volts:                     | 100V-277V                       |
| Lumens:                    | 2200L-4600L                     |
| Lamp Base :                | Integrated                      |
| Lamp Shape :               | Integrated LED                  |
| CRI:                       | 80+                             |
| CCT (Kelvins):             | 3500K/4000K/5000K               |
| Temperature:               | Warm to Cool White              |
| Beam Spread :              | 120                             |
| Hours Rated:               | 50000                           |
| Dimmable:                  | Yes-Dimmable                    |
| DimmableText:              | 0-10V Dimming Only              |
| Operating Temperature :    | -17C (+1.4F) to +45C (+113F)    |
| Lamp Included :            | Integrated                      |
| Replaceable Light Source : | No                              |
| Number of LEDs :           | 84                              |
| Connection:                | Hardwire                        |
| Surge Protection :         | Built-in surge protection - 2KV |
| THD:                       | 9%                              |
| Power Factor :             | 0.9                             |
| Warranty:                  | 5 Year Limited - Fixtures       |

## PACKAGING

|                  |                      |
|------------------|----------------------|
| Each UPC:        | 045923657078         |
| Each Quantity:   | 1                    |
| Each Dimensions: | 25.00 x 2.56 x 25.20 |
| Case UPC:        | 10045923657075       |
| Case Quantity:   | 1                    |
| Case Dimensions: | 25.00 x 2.56 x 25.20 |

## PHYSICAL

|                |                                 |
|----------------|---------------------------------|
| Finish:        | White                           |
| Lens Finish:   | Frost                           |
| Lens Material: | Poly methyl methacrylate (PMMA) |
| Finish Family: | White                           |
| Dimensions:    | L:23.75" W:23.75" H:1.50"       |
| Weight (Lbs.): | 4.85                            |
| Material:      | Aluminum / Steel                |
| Panel Size:    | 2x2                             |
| Sensor:        | No Photocell                    |

## INSTALLATION

|                   |            |
|-------------------|------------|
| Wire Gauge:       | 14 AWG     |
| Wire Length:      | 3.54 in.   |
| Wire Temperature: | 80C (176F) |

## COMPLIANCE

|                        |                                                                   |
|------------------------|-------------------------------------------------------------------|
| Safety Listing:        | cETLus                                                            |
| Location Rating:       | Damp                                                              |
| Indoor/Outdoor:        | Indoor                                                            |
| Energy Star Qualified: | No                                                                |
| DLC Approved:          | Yes                                                               |
| DLC Classification:    | Standard                                                          |
| DLC ID:                | S-GXP8Lo                                                          |
| DLC Primary Use:       | 2x2 Luminaires for Ambient Lighting of Interior Commercial Spaces |
| CA Prop 65:            | Lead                                                              |
| FCC Compliant:         | Yes                                                               |
| IP Rating:             | IP20                                                              |
| NSF Approved:          | Yes                                                               |
| RoHS Compliant:        | Yes                                                               |
| SDS Class:             | LED_Fixture                                                       |
| Restrictions:          | No Restrictions                                                   |

## INFO

Additional Info:

Driver Specs - VDC38-48V; 430/620/810mA



## ACCESSORIES



**65-589** 2X2 Backlit Panel Flange Kit; White Finish



**65-591** 4' - Suspension Kit for LED Backlit Flat Panel Fixtures



**65-596** 2X2 Backlit Panel Frame Kit; White Finish



**65-596R1** 2X2 Backlit Panel Frame Kit; White Finish; For use with EM versions



**65-600** 2X2 Backlit Panel Frame Kit; Slim Version; White Finish



**65-571R1** - LED Backlit Flat Panel; 2 ft. x 2 ft.; Wattage and CCT Selectable; 100-277 Volt; ColorQuick Technology; PowerQuick Technology

#### DIMMER COMPATIBILITY

|         |                               |
|---------|-------------------------------|
| LeGrand | ADPD4FBL3P2W4                 |
| Eaton   | DF10P                         |
| Leviton | DS710-10Z                     |
| Lutron  | DVSCSTV                       |
| Lutron  | DVSTV                         |
| Leviton | IP710-LFZ                     |
| Lutron  | MS-Z101                       |
| Lutron  | MS-Z101-V                     |
| Lutron  | NTSTV-DV                      |
| Lutron  | RMJS-8T-DV-B PJ2-3BRL-GWH-L01 |
| Eaton   | SF10P                         |