


INSTALLATION INSTRUCTIONS

LED FLUSH MOUNT LIGHT

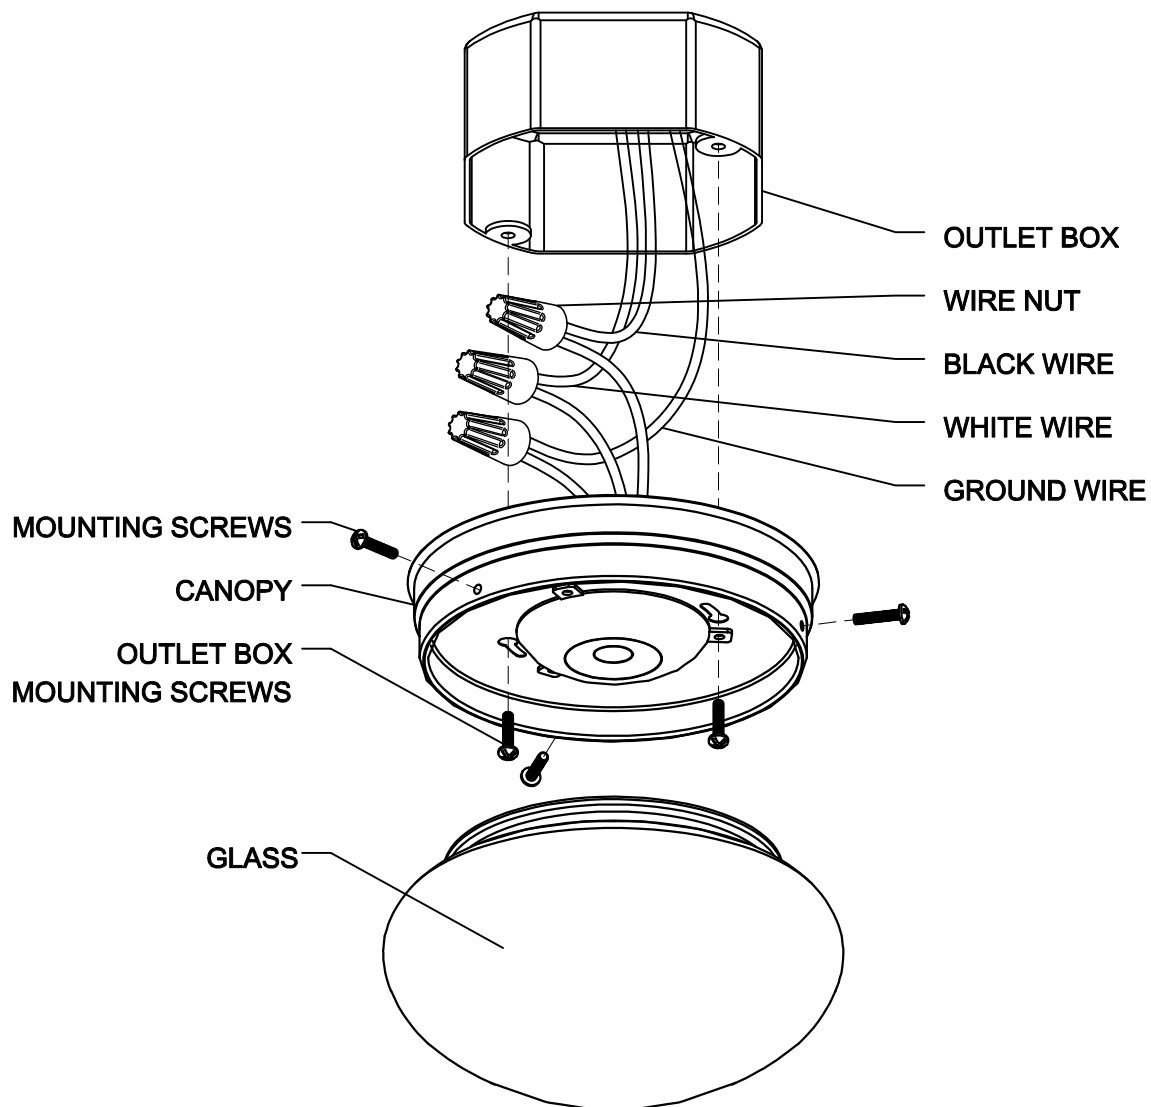

ASSEMBLY AND INSTALLATION

1. Shut off the power.
2. Loosen the three mounting screws from the canopy, and remove the glass.
3. Install cross bar to the 4" junction box with junction box screw.
4. Connect supply wires to fixture wires and insulate with proper size wire nuts.
 - a) Connect ground wire (green or bare) to fixture ground wire (green or bare).
 - b) Connect common (white) wire to fixture common (white).
 - c) Connect hot (typically black) wire to fixture black wire.
5. Attach fixture to the outlet box by fastening supplied 1½" outlet box screws through canopy keyholes. Make sure Disk Light is flush to the ceiling.
6. Twist lock the glass into the canopy, then lock it with mounting screws .

SAVE THESE INSTRUCTIONS AND WARNINGS.

This product is designed for dimming with many 120V Leading Edge(LE) and Trailing Edge(TE) phase control dimmers. compatible with most residential type dimmers available on the market. The dimming performance will depend on kinds of dimmer and dimmer settings. (not provided).