

SPECIFICATIONS:

DESCRIPTION

Flush-mounted ceiling fixture, featuring Opal Glossy glass diffuser.

LAMPING

LED: 16W Integrated source, 120V, dimmable, 85+ CRI, 3000°K CCT, 1600 lumens, 30,000 hours, included. (Viva 13 only)

LED: 20W Integrated source, 120V, dimmable, 85+ CRI, 3000°K CCT, 2200 lumens, 30,000 hours, included. (Viva 16 only)

DIFFUSER

Handcrafted glass diffuser in Opal Glossy with patterned Clear center .

13" Dia. x 4" H

16" Dia. x 4.5" H

CONSTRUCTION

Glass diffuser is secured to fitter with "twist & lock" bayonet action. Stamped aluminum fitter is powder coated white.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture.

90°C supply wire required for incandescent lamping.

LABELS



UL or ETL Listed. Suitable for Damp Locations (interior use only).



OPAL GLOSSY/CLEAR

Project Information:

ORDERING:

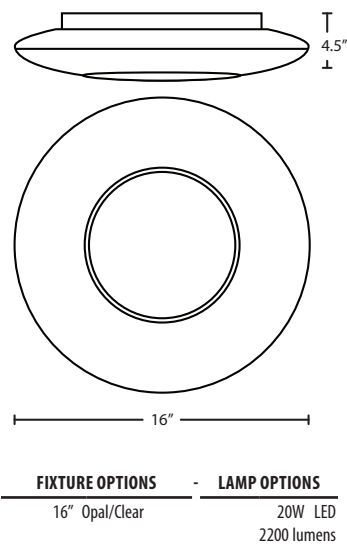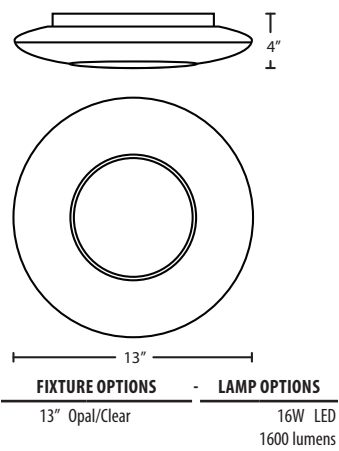

Ex. Ceiling, Opal/Clear
Shade,

Project Information: