

Office Chair Assembly Manual

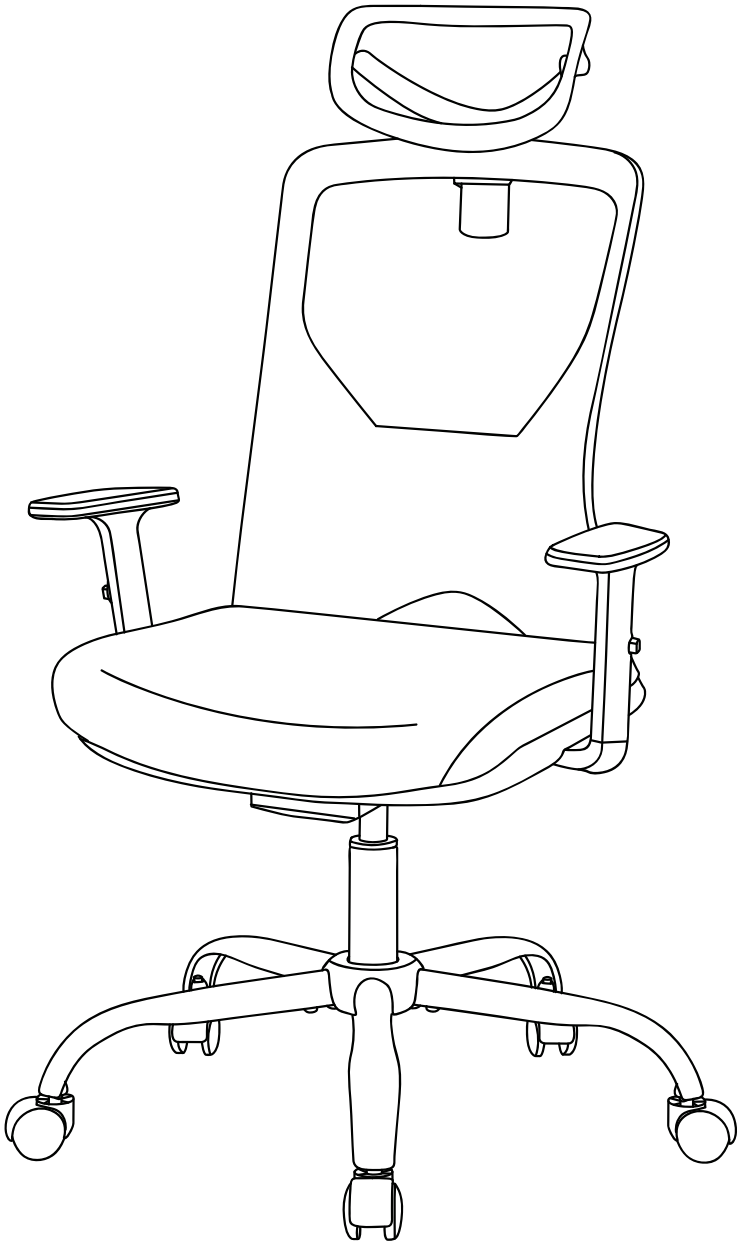


Instruction Manual

Contents


Make sure that the package contains the following parts:




1 Back Cushion(1)




2 Seat Cushion(1)




3 Arms(2)




4 Seat Plate(1)




5 Headrest(1)




6 Gas Lift(1)



7 Star Base(1)




8 Casters(5)




Bolts M6 × 14mm(10)

Ⓐ




Bolts M6 × 35mm(2)

Ⓑ




Bolts M6 × 40mm(2)

Ⓒ




Bolts M6 × 45mm(6)

Ⓓ




Bolts 5 /16*3/4mm(3)

Ⓔ



Washers M8 × 18mm(7)

Ⓕ




Washers M6 × 15mm(6)

Ⓖ




Split Washers M8(3)

Ⓗ




Bolts 6*18(2)

Ⓘ





Wrench(1)

Ⓙ

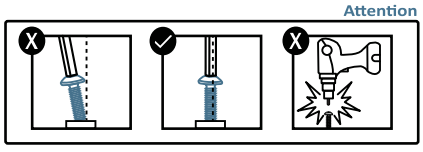

Attach The Bottom

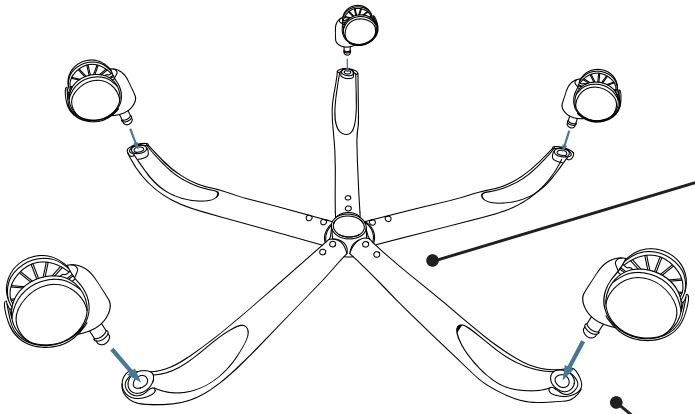

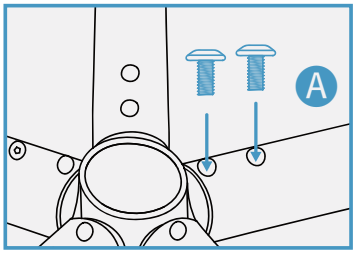

STEP 1


Turn the star base⑦ upside down, Secure detachable feet with ten bolts(A) as shown.


STEP 2

Press the casters⑧ into the holes at the end of each base leg.


STEP 3

Insert the Gas Lift⑥ into the center hole of the star base.



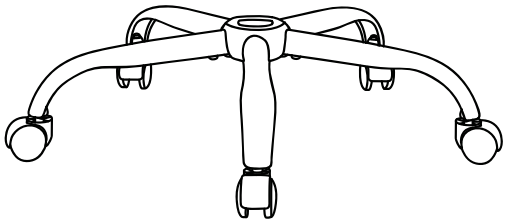

Attach the Arms & Seat Plate

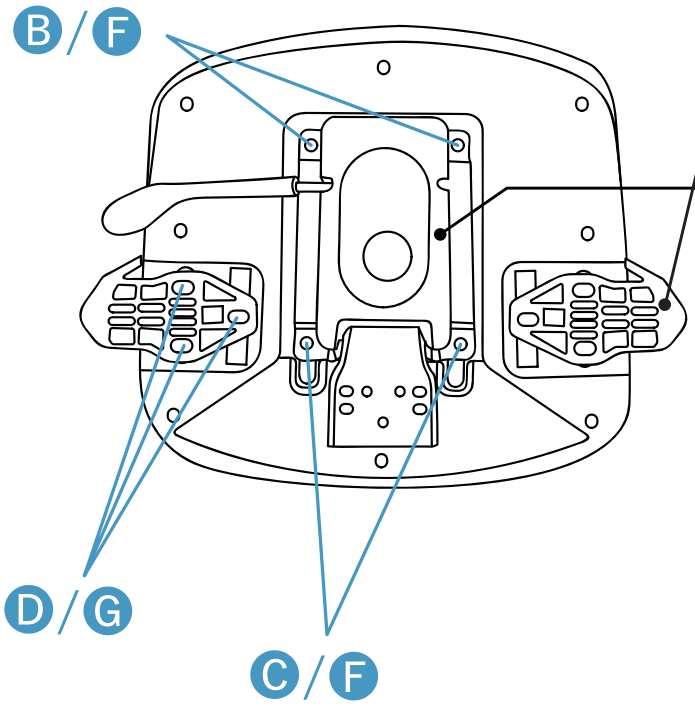



STEP 1

Attach the Arms③ to the Seat Cushion② using Six Bolts(D) and Six Washers(G).


STEP 2

Attach the Seat Plate④ to the Seat Cushion using Two Bolts(B) Two Bolts(C) and Four Washers(F).Place Bolts(B) at the front and Bolts(C) at the rear.



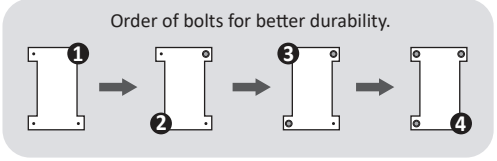


Attach the Backrest

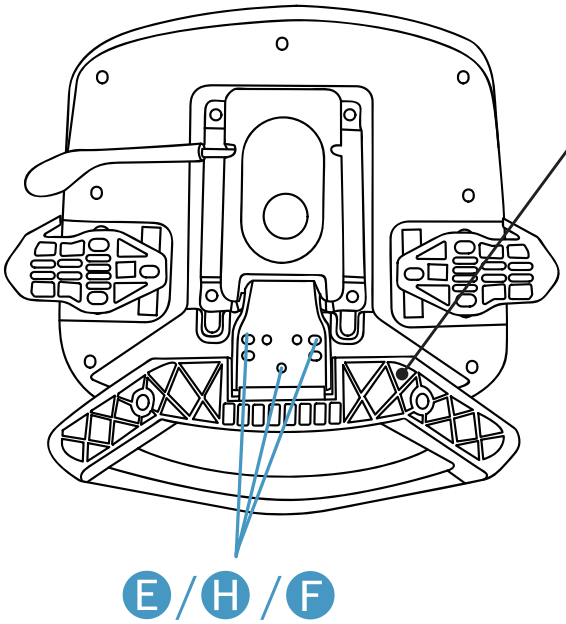



STEP 1

Attach the Back Cushion ① to the Seat Cushion ② using Three Bolts(E) Three Split Washers(H) and Three Washers(F).

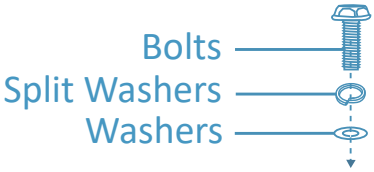

Attach the Headrest

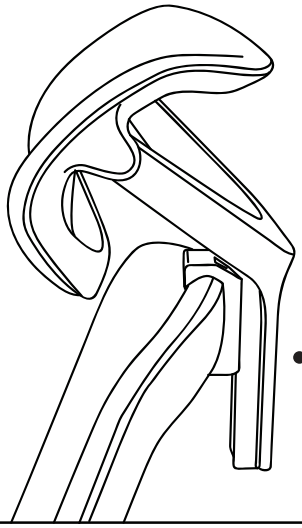


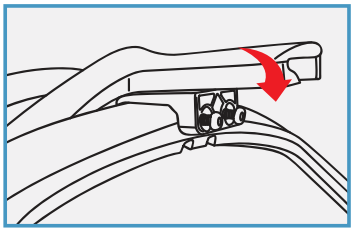

STEP 1

As shown in the diagram, attach the Headrest ⑤ to the Back Cushion ① using Two Bolts(I).

Push the Seat Cushion Down onto the Lift

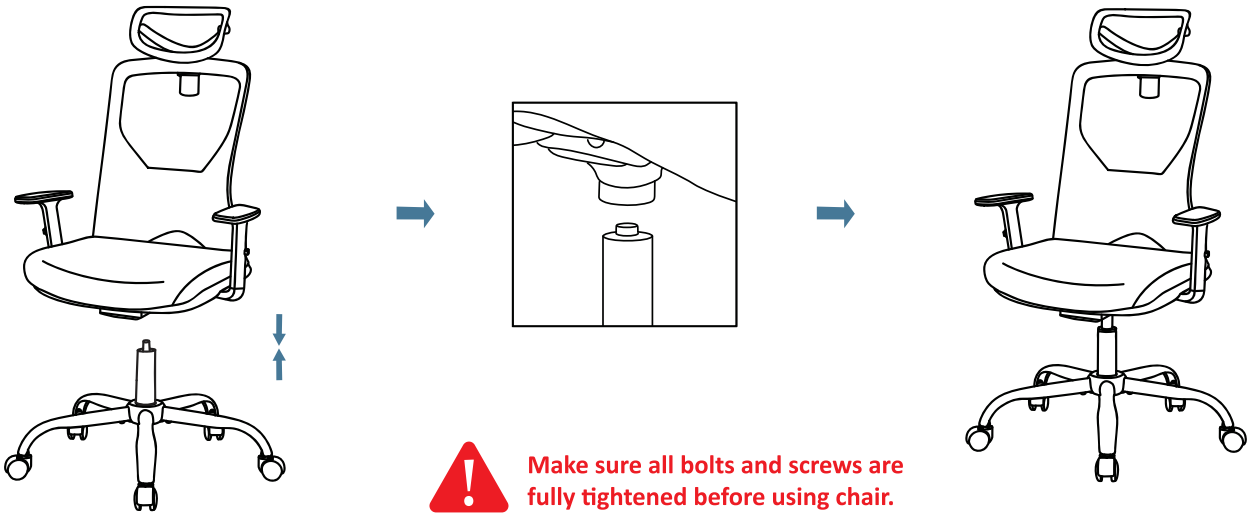

Make sure all bolts and screws are fully tightened before using chair.