INSTALLATION INSTRUCTIONS


CAUTION -Turn off the main power at the circuit breaker before starting installation to prevent possible injury from electrical shock.

GENERAL- All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Unpack and check the contents of the box, make sure that no parts are missing by referencing the illustrations on the installation instructions.

INSTALLATION AND ASSEMBLY (USE FOR PENDANT)

1. Pull the supply wires(5 & 6) and the house ground wire(7) out from the outlet box(1) and attach the mounting bracket(2) to the outlet using the slotted holes on the mounting bracket(2) and the mounting screws(3) provided.
2. Adjust the hanging height: Loosen the set screw(14) by a screwdriver to release the the cord for adjustment. Retighten the set screw(14) to hold the cord in place.
3. Connect the power supply wires to the fixture lead wires by connecting the black fixture wire(9) to the black supply wire(6), and the white fixture wire(8) to the white supply wire(5) using wire connector(11). Connect the fixture ground wire(10) to the house ground wire(7) by fixed on the mounting bracket(2).
3. Carefully tuck all wiring back into the outlet box. Align the fixture base(12) over the outlet box(1), making sure that the fixture screws(4) can be threaded through the fixture bade(12).
4. Secure the fixture base(12) into place using the two provided decorative nuts(13), and tighten until secure.
5. Installation complete, restore power at the circuit breaker and turn the fixture.

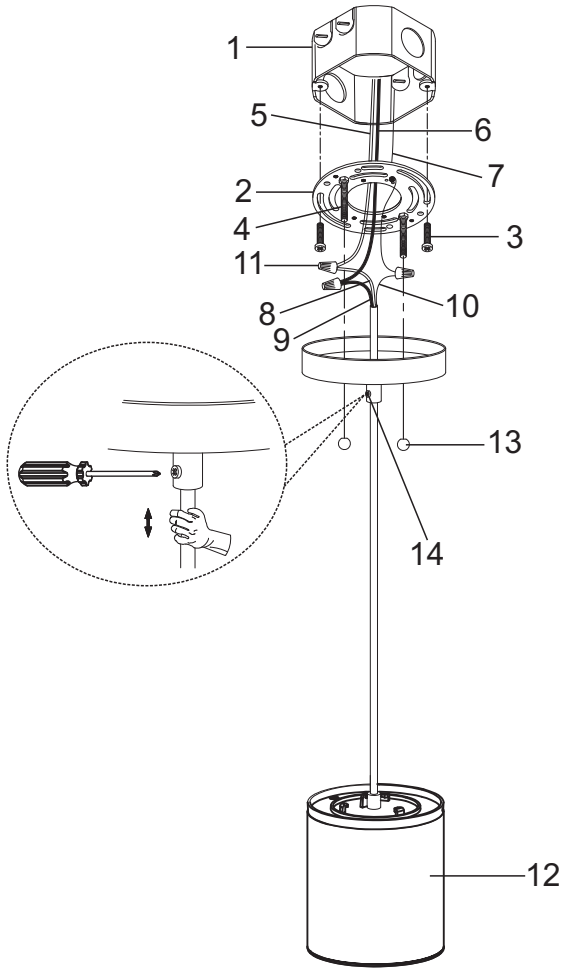

1. OUTLET BOX (EXCLUDED)
2. MOUNTING BRACKET
3. MOUNTING SCREW
4. FIXTURE SCREW
5. WHITE SUPPLY WIRE
6. BLACK SUPPLY WIRE
7. HOUSE GROUND WIRE
8. WHITE FIXTURE WIRE
9. BLACK FIXTURE WIRE
10. FIXTURE GROUND WIRE
11. WIRE CONNECTOR
12. FIXTURE BASE
13. DECORATIVE NUT
14. SET SCREW

INSTALLATION AND ASSEMBLY (USE FOR FLUSH MOUNT)

1. Instead of cutting, you may use a screwdriver and a wrench to remove the pendant mounting bracket, the decorative nuts and the canopy. Use scissors to cut the cord to a suitable length, leaving at least 6 inches in length.

2. Connect the power supply wires to the fixture lead wires by connecting the black fixture wire(9) to the black supply wire(6), and the white fixture wire(8) to the white supply wire(5) using wire connector(11). Connect the fixture ground wire(10) to the house ground wire(7) by fixed on the mounting bracket(2).


3. Carefully tuck all wiring back into the outlet box.

4. Hang the safety hook(14) with the fixture base(12), and then aim the fixture base(12) to the snap position and push it to the left or right until all clips on the fixture base(12) slide into the mounting bracket(2) and are secured in place.

5. Use an hexagonal screwdriver(13) to screw the plastic screws(4) into the fixture base(12).

6. Installation complete, restore power at the circuit breaker and turn the fixture.

Care and maintenance - Use damp and clean cloth to wipe the surface light switch on to activate this fixture.

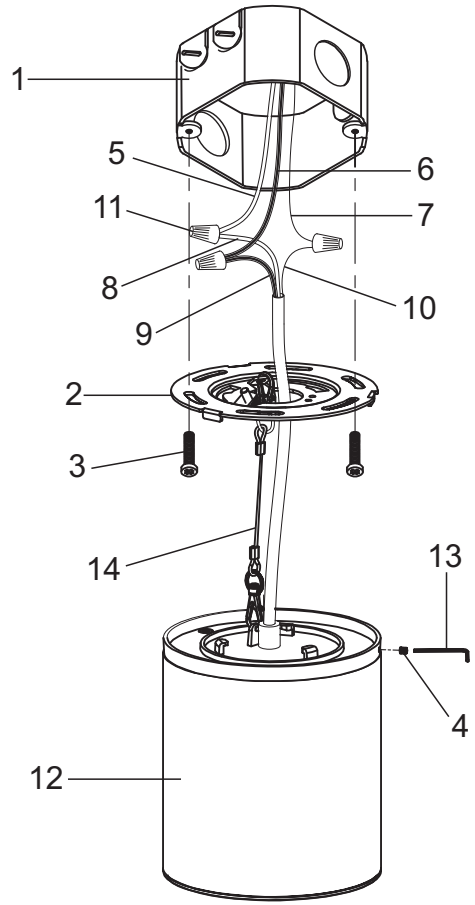

1. OUTLET BOX (EXCLUDED)
2. MOUNTING BRACKET
3. MOUNTING SCREW
4. PLASTIC SCREW
5. WHITE SUPPLY WIRE
6. BLACK SUPPLY WIRE
7. HOUSE GROUND WIRE
8. WHITE FIXTURE WIRE
9. BLACK FIXTURE WIRE
10. FIXTURE GROUND WIRE
11. WIRE CONNECTOR
12. FIXTURE BASE
13. HEXAGONAL SCREWDRIVER
14. SAFETY HOOK