



# PEERLESS®


## Mounting without escutcheon plate

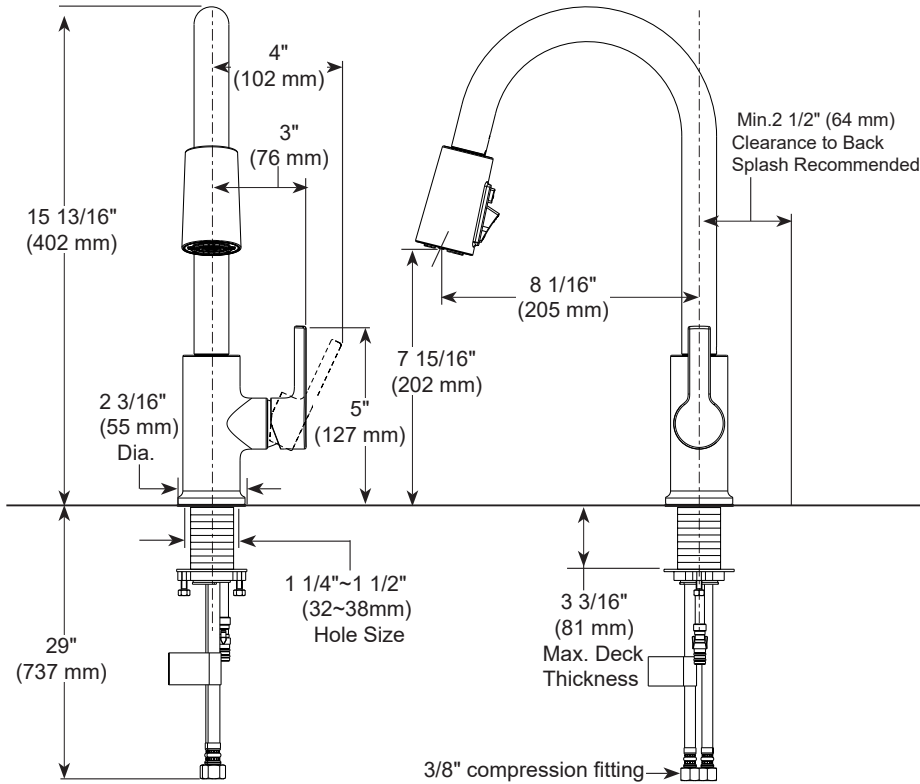

## Mounting with escutcheon plate

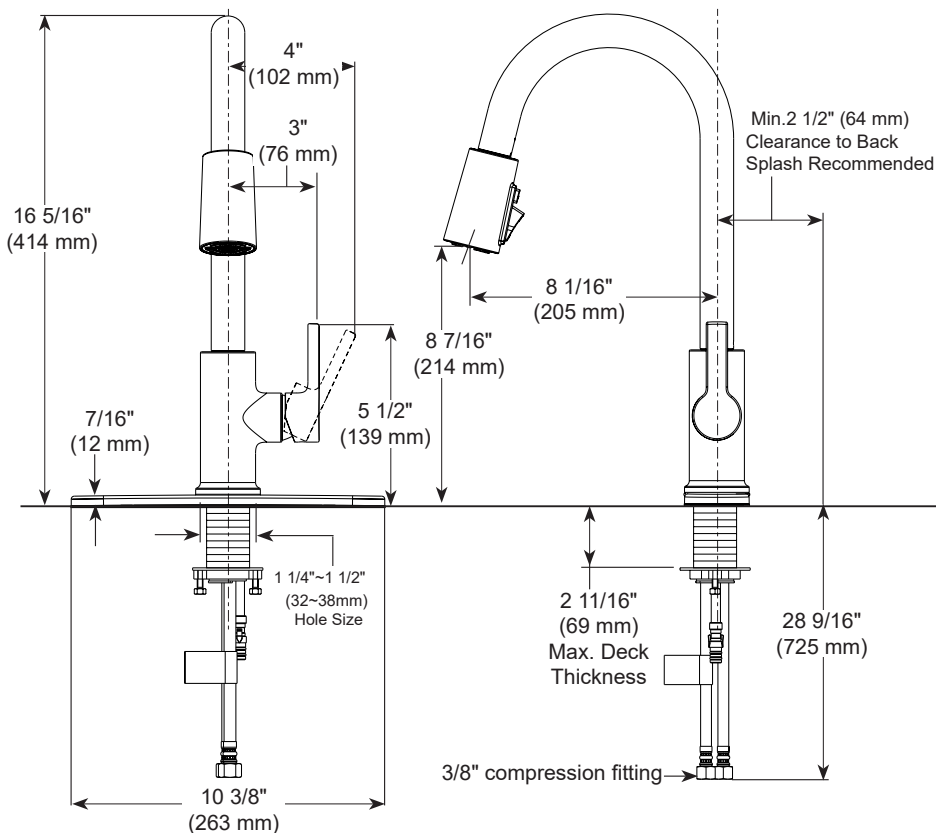

P7912LF-▲  
P7912LF▲-1.0

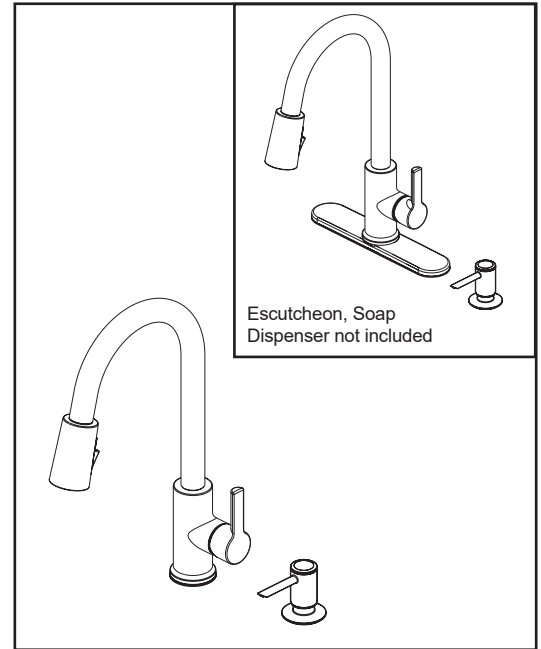

### KITCHEN FAUCET:

- Flute™ Collection
- Single Handle Pull-down
- 1, 2, 3 or 4 Hole Sink Applications

### STANDARD SPECIFICATIONS:

- Max. flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa (P7912LF▲)
- Max. flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa (P7912LF▲-1.0)
- One, two, three or four hole mount options (escutcheon and soap dispenser optional, not included)
- 3 function wand: aerated stream, spray, POWERInse™
- Dual integral check valves in sprayer
- Ceramic cartridge
- Spout rotates 360°
- Red/Blue indicator markings.
- Polymer braided flexible supply hose with with 3/8" compression fitting - 29" (737mm) long

### WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to [www.peerlessfaucet.com](http://www.peerlessfaucet.com) for the complete details of our limited warranty.

### WATER EFFICIENT



\* Flow rate of 1.5 gpm versus Industry Standard ASME A112.18.1 / CSA B125.1 of 2.2 gpm

### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ICC/ANSI A117.1 – Valve control only