



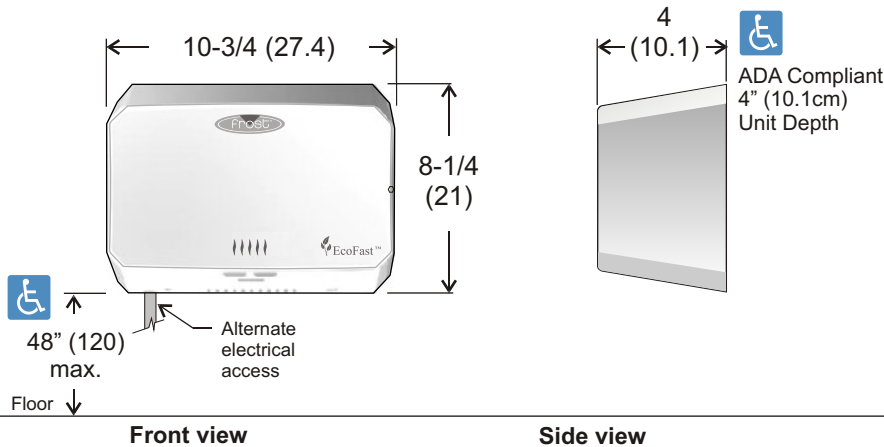

## Compact, High Speed Hand Dryer, Hands Free

**Code 1195:** Compact, slim, high speed, hands free hand dryer, white finish.

Overall dimensions in inches (centimeters in brackets).

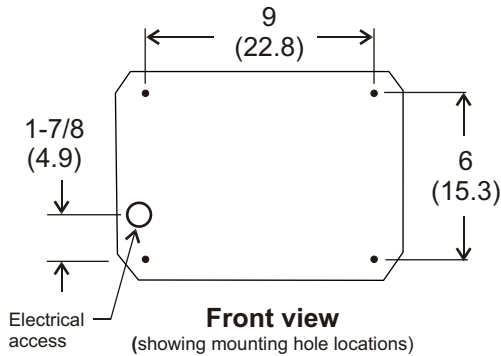

## Specifications

- Site location:** These compact hand dryers are ideal for renovations and areas with 15 amp. circuits available.
- Materials:**
  - Outer casing is 18 ga. drawn in white powder coat finish.
- Power Usage:**
  - Whole unit is rated at 1000 watts. Heating element: 500 watts. Operating Voltage: 110-120 Vac,
  - 50/60Hz, Amps: 1.0kw. Standby Power: Less than 0.5W. Brush motor: 11/16HP, 500W, 29,000
  - R.P.M, dual ball bearings.
- Electrical Safety:**
  - Motor thermal protection: auto resetting thermostat turns unit off at 105 deg. C (221 deg. F).
  - Drip proof: IP23; Isolation: Class 1. Heater Thermal Protection: Auto Resetting Thermostat turns unit off at 85 deg. C (185 deg. F)
  - Drying time: 10 - 15 seconds. Sound level: 75 dB at 1 M. Sensor range: 6" (15cm).
- Performance:**
  - Air speed output: 35 - 70 m/s (79 - 158 mph). Volume: 101.7 m<sup>3</sup>/h, (53.8 CFM).
  - Sound Level: 72.8 dB at 1m. Air output temperature: 55 degrees C (131 deg. F). Timing protection: 60 seconds auto shut off.
  - Complete 5 years from date of purchase.
- Warranty:**
  - Motor assembly and all working parts must be kept clean from excessive dirt/dust and any form of foreign debris. Failure to maintain unit may reduce performance and result in void of warranty.
- Maintenance:**
  - Motor assembly and all working parts must be kept clean from excessive dirt/dust and any form of foreign debris. Failure to maintain unit may reduce performance and result in void of warranty.
- LEED: Credit:**
  - Minimum Energy Performance: Design and Construction, EA Prerequisite 2
  - Optimize Energy Performance: Design and Construction, EA Credit 1
- Shipping Weight:** 3.4 kgs (7.5lbs)
- Installation:** Supplied with mounting template, instructions, screws and anchors.

