



# Mariposa® | K-1257-LH

72" x 36" alcove heated whirlpool bath, left drain

## Features

- Single-speed whirlpool offers performance and value, with six fully adjustable jets
- Hydromassage flow and direction can be controlled at each jet
- Built-in heater
- Generous length provides a spacious bathing area
- Hourglass shape adds style and elegance to your bathroom
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface



## Available Colors/Finishes

*Color tiles intended for reference only.*

0 White



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-29-2026 21:14 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
UL Listed

## Technical Information

*All product dimensions are nominal.*

|                      |                              |
|----------------------|------------------------------|
| Drain Location:      | Left                         |
| Drain Hole Diameter: | 2-1/4" (57 mm)               |
| Basin Area, Bottom:  | 50" x 24" (1270 mm x 610 mm) |
| Basin Area, Top:     | 65" x 27" (1651 mm x 686 mm) |
| Water Depth:         | 14" (356 mm)                 |
| Water Capacity:      | 72 gal (272.5 L)             |
| Minimum Floor Load:  | 41 lbs/ft <sup>2</sup>       |
| Weight:              | 115 lbs (52.2 kg)            |

## Material

- Acrylic

## Recommended Products/Accessories

K-1491 Bath/whirlpool pillow, removable  
K-23726 Drain treatment  
K-23732 Tub & shower cleaner  
K-7213 Cable bath drain with PVC tubing  
K-7214 Cable bath drain, less PVC tubing  
K-7259 Brass toe tap bath drain  
K-7265 Brass toe tap bath drain

## Required Products/Accessories

- K-T37392 Rotary-turn bath drain trim
  - K-T37391 Rotary-turn bath drain trim
- or
- K-78438 30" cable bath drain
  - K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing

## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

|         |                    |
|---------|--------------------|
| Pump:   | 120 V, 15 A, 60 Hz |
| Heater: | 120 V, 15 A, 60 Hz |

## Electrical Component Ratings


|                   |                              |
|-------------------|------------------------------|
| Pump:             | 120 V, 7.5 A, 60 Hz          |
| Number of Speeds: | Single                       |
| Heater:           | 120 V, 12.5 A, 60 Hz, 1500 W |

## Warranty

*See website for detailed warranty information.*



KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty



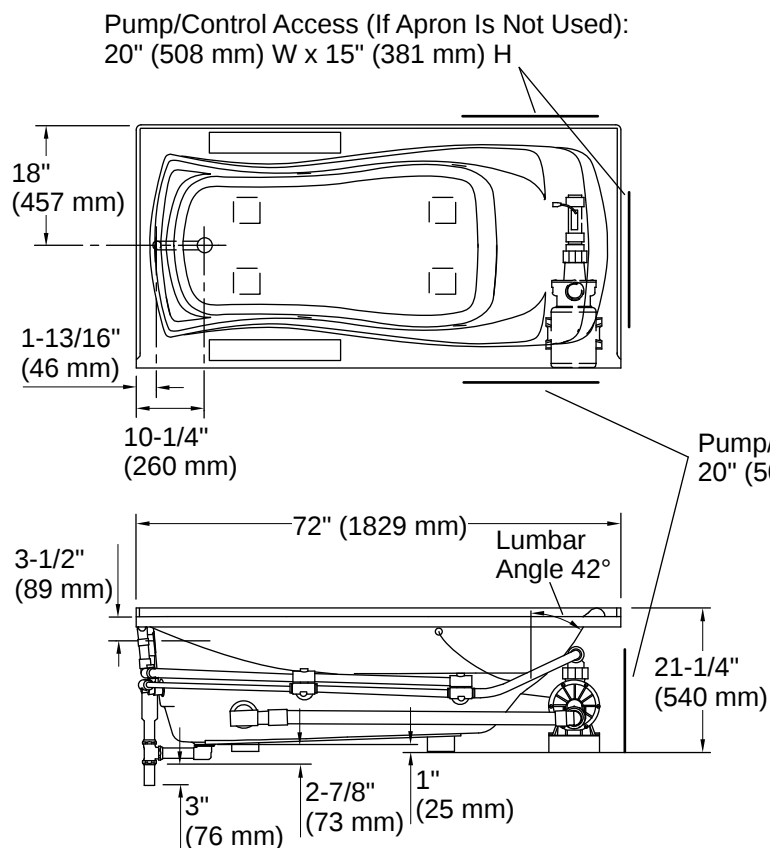

No change in measurements if connected with drain illustrated. (K-11677)

☐ Recommended Faucet Location

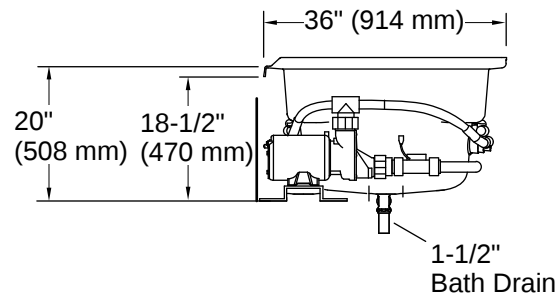

## Installation

- Left drain
- Alcove

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-29-2026 21:14 - US-CA

THE BOLD LOOK  
OF **KOHLER**