

P39011-8BK
OPERATIONS MANUAL



Maxxa

MADE IN CHINA

Assembly & Installation Instructions

Dear Customer :

Thank you for choosing 4modernhome!

We appreciate your business. Should you have **any questions** or encounter **any issues**, please don't hesitate to contact us. You can reach us via email at support@4modernhome.com or by **calling 469-312-6428**. Our team is dedicated to ensuring your complete **satisfaction** with your purchase. We value your feedback, as it helps future customers in making informed decisions. We encourage you to share your experience by leaving a brief product review on the platform where you made the purchase. Additionally, you can scan the **provided code for an installation video** to assist you further. Once again, thank you for choosing 4modernhome!


Best regards!

[Support Team]

Warning: If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C.requirements. If there are any questions, contact a qualified electric contractor.

Warning: California Residents Proposition 65 This product contains lead, a chemical known to the state of California to cause cancer and birth defects or other reproductive harm. Do not place the product in your mouth. Wash your hands after handling this product.

Caution: It is highly recommended to get an electrician to install this light. Please make sure to turn the electricity off at the main circuit breaker before beginning installation. All glass is fragile. Use care when handling glass component(s) and/or lamp(s).

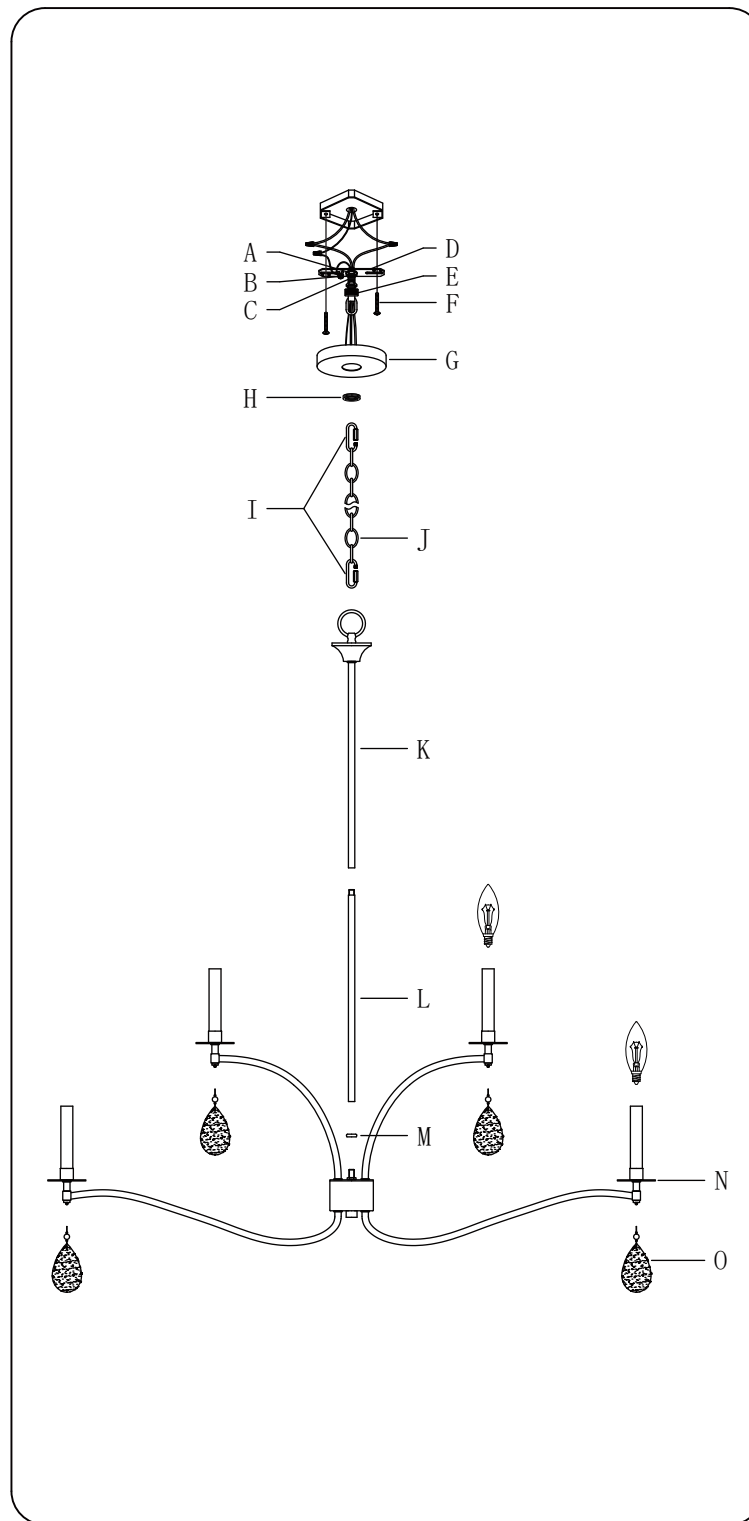

WIRE CONNECTION DIAGRAM

Wires meeting safety standards are required to connect the electrical circuit.

CAUTION: Risk of fire



Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is completed.

PARTS INCLUDED

Code	Part Description	QTY
A	Lock nut	3PCS
B	Ground screw	1PC
C	Nipple	1PC
D	Crossbar	1PC
E	Screw collar loop	1PC
F	Junction box screw	2PCS
G	Canopy	1PC
H	Screw collar ring	1PC
I	Quick link	2PCS
J	Chain	1PC
K	Column rod	1PC
L	ROD 15"	1PC
M	Cup	1PC
N	Fixture body	1PC
O	Crystal	8PCS

Assembly and Installation Steps

Step4

Install crossbar (D) with nipple (C), lock nut (A) and screw collar loop (E) to the junction box using two junction box screws (F). The side of crossbar (D) marked "GND" must face out. The length of nipple (C) into crossbar (D) maybe adjusted if necessary. Then tighten with lock nuts (A) provided.

Step7

Raise the canopy (G) to the ceiling and secure in place by screwing the screw collar ring (H) onto the screw collar loop (E).

Step5

Slip screw collar ring (H), follow up by canopy (G) and allow them to rest on fixture loop of rod (K). Attach another quick link (I) to another end of chain (J). Fasten the end link of quick link(I) to the screw collar loop (E). Note: The quick link (I) must be fully closed. Insert the fixture wires to up through the nipple(C).

Step3

Thread the fixture wire and bare copper ground wire up through every other link in the chain (J).


Step1

The arms have been placed to lay flat for shipping. Adjust arms to proper position. Secure column rod (K) with fixture loop, rod 15" (L) and metal cup (M) onto all thread of fixture body (N).

Step6

Connect electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the crossbar (D) using the green screw (B) provided. Tuck wire connectors neatly into the junction box.

Fig. 2

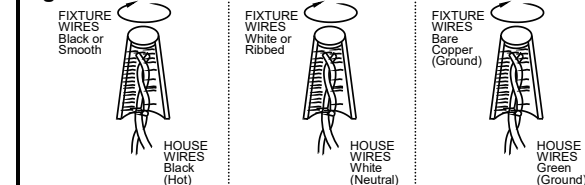

Step2

Determine the desire hanging height to remove the excess chain link from chain (J). Attach the quick link (I) to one end link of chain (J) and attach the quick link (I) to the fixture loop of column rod (K). Note: The quick link (I) must be fully closed.

Step8

Install the crystal (O) to the bottom of the socket.

Step9

Install 8 E12 bulbs (Not included)

