
LED Picture Lights

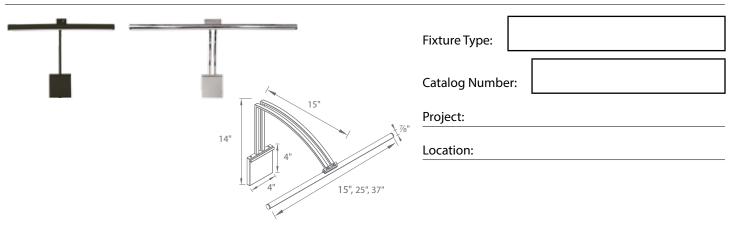

PRODUCT DESCRIPTION

Designed to disappear, the low profile picture light features a canopy that both hides behind the artwork and serves as the mount.

At less than an inch in diameter, the picture light shrouds the smallest light source available to provide substantial, full spectrum, and high quality lighting. Three lengths with 35 degree rotation accommodates artwork of varying sizes.

FEATURES

- Head rotates 35° up or down
- 110° beam angle
- Meets 2013 California Title 24 Efficiency
- Replaceable LED module
- For portable models, 8 foot cord & plug with 18" wire cover in matching finish included
- 70,000 hour rated life

SPECIFICATIONS

Construction: Aluminum with frosted plastic lens

Power: Integral driver, no remote driver needed

Light Source: Direct wiring or plug-in LED

Mounting: Hard wired and plug-in models available

Dimming: Dim to 10% with electronic low voltage (ELV) dimmer.

Finish: Black (BK), Brushed Nickel (BN), Chrome (CH) and Satin Brass (SB)

Standards: ETL & cETL Listed

FIXTURE PERFORMANCE

Model #	Watt	Photometric Lumens	Delivered Lumens	Efficacy
	8.5W	595	240	28 Lm/W
	16W	1186	535	33 Lm/W
	23W	1785	850	37 Lm/W

ORDER NUMBER

Model	Length		Finish		
	15-27	15"	BK Black BN Brushed Nickel CH Chrome SB Satin Brass	Brushed Nickel	
	25-27	25"			
	37-27	37"			
:	15P-27	15"	BK BN CH SB	Black Brushed Nickel Chrome Satin Brass	
	25P-27	25"			
	37P-27	37"			
	Model	15-27 25-27 37-27 15P-27 25P-27	15-27 15" 25-27 25"	15-27 15" BK BN CH SB 15P-27 15" BK BN CH SB 25P-27 25" BK BN CH	15-27 15" BK Black BN Brushed Nickel CH Chrome SB Satin Brass 15P-27 15" BK Black BN Brushed Nickel CH Chrome SB Satin Brass

