


Installation instruction



A

Side Short Panel

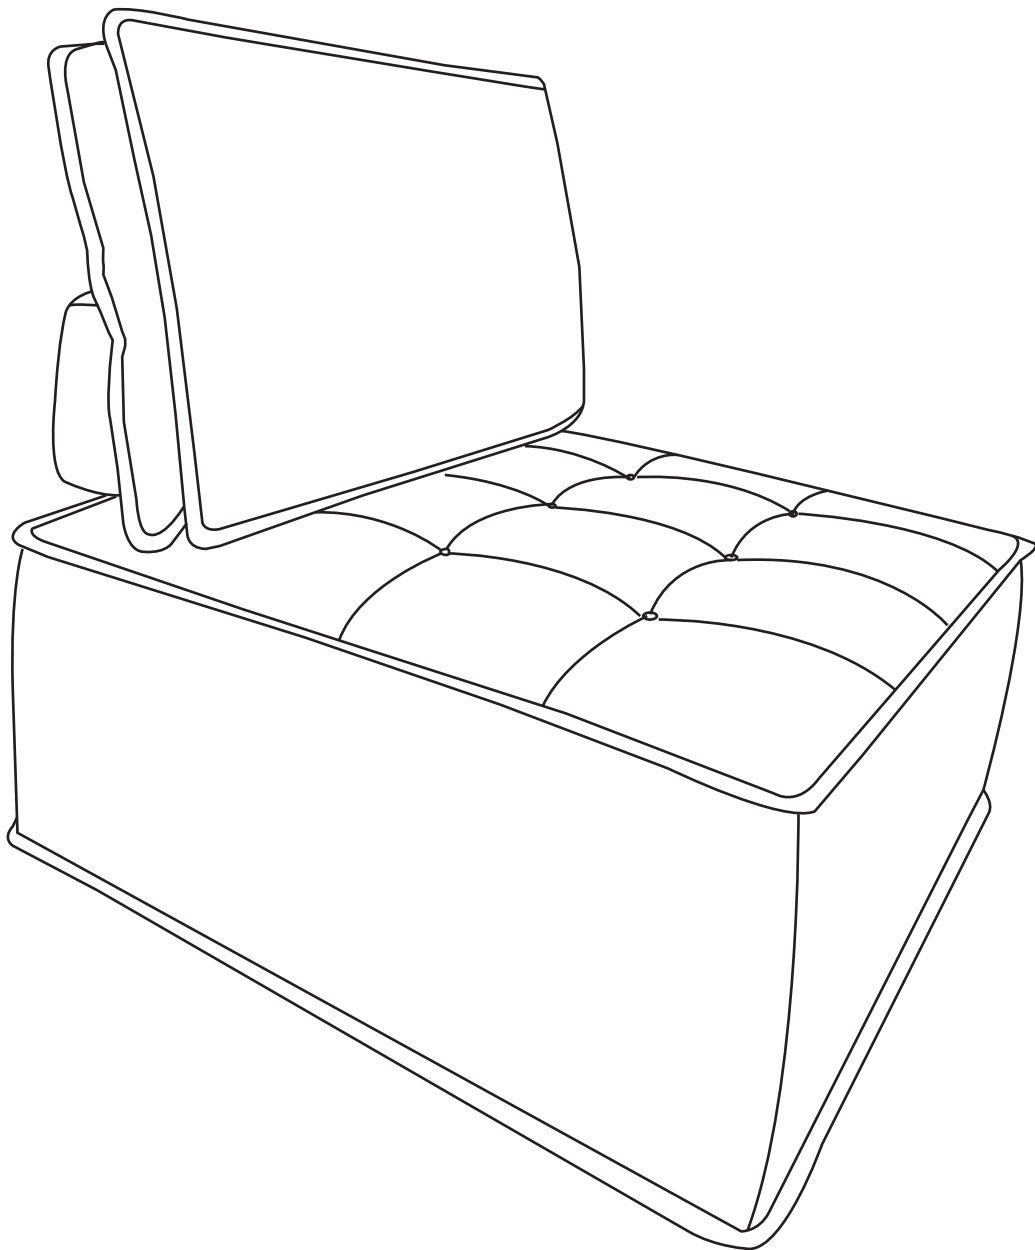

Length:29.9 INCH

X 2

B

Front Long Panel



Length:30.7 INCH

X 1

C

Back Long Panel



Length: 30.7 INCH

X 1

D


Square Tube Legs



X 4

E


Back



X 1

F

Seat Cushion

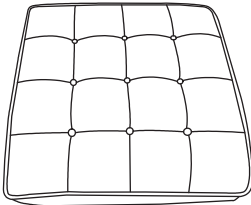

X 1

G


Back Steel Plate



X 2

H


Back Cushion



X 1

I

Bottom Straps



X 1

J

Screw



M6*20 MM

X 8

K

Screw



M6*40 MM

X 16

L

Washer



X 24

M


Wrench



X 1


Step 1

Install the square tube legs D to the side short panel A with screws K and washers L.

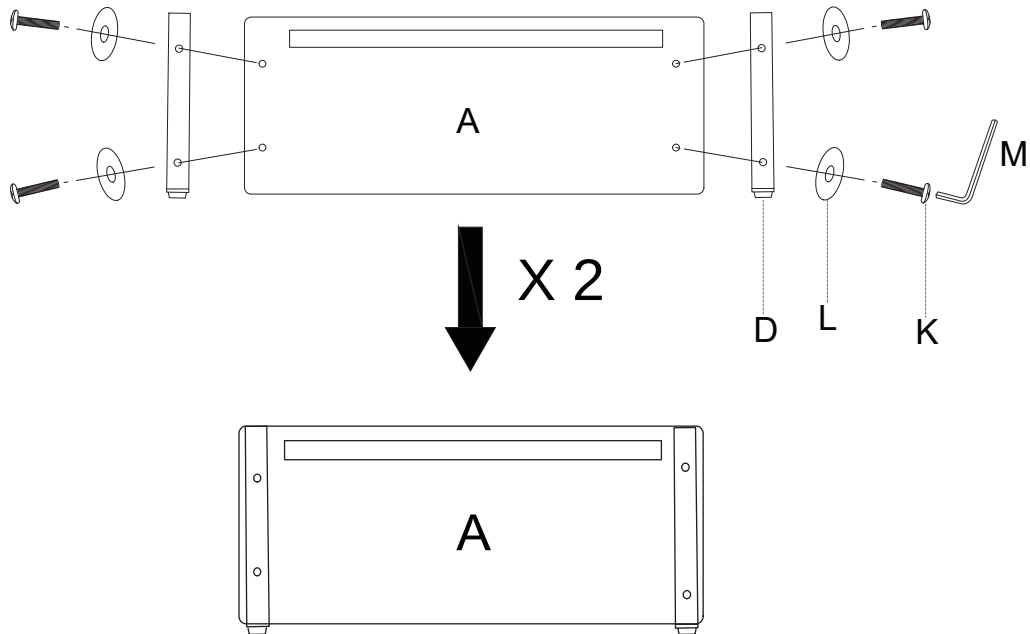



Step 2

Connect the side short panel A and the front long panel B with screws K and washer L.

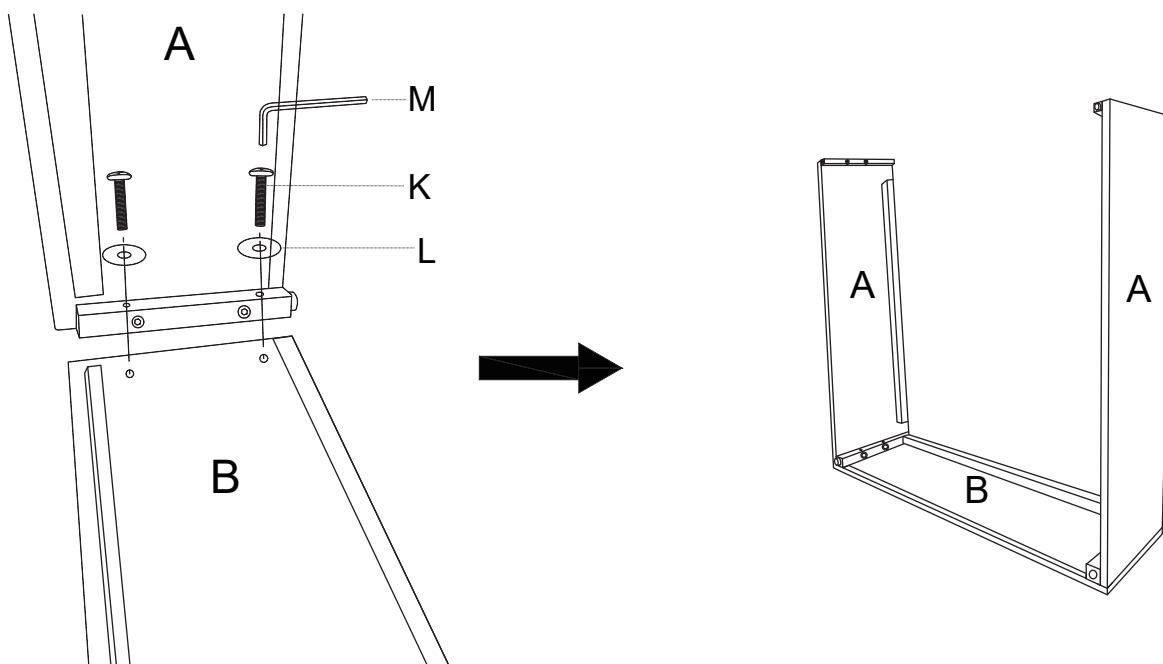



Step 3

Connect the side short panel A and the back long panel C with screws K and washer L.

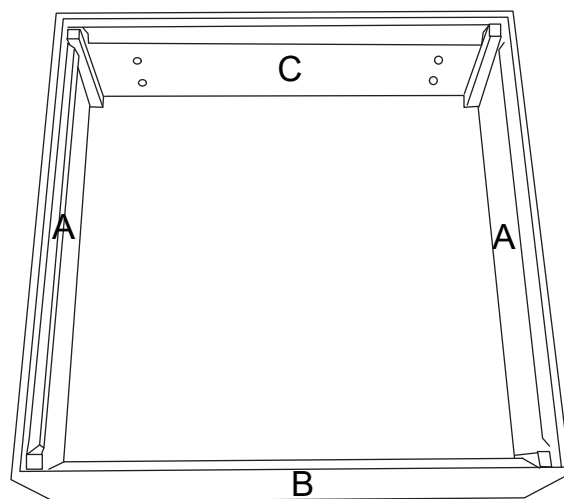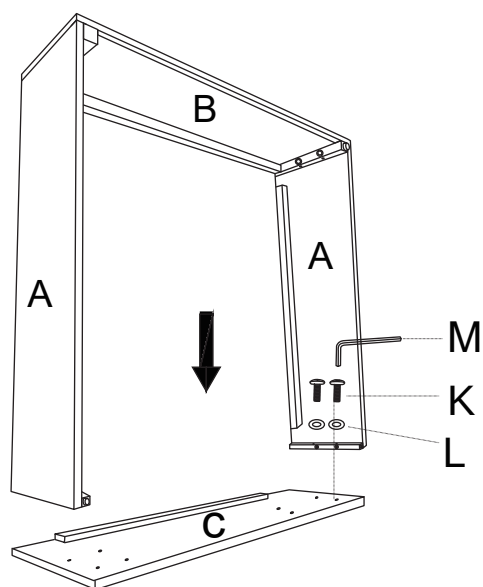

Step 4


Put the bottom straps I on the frame.

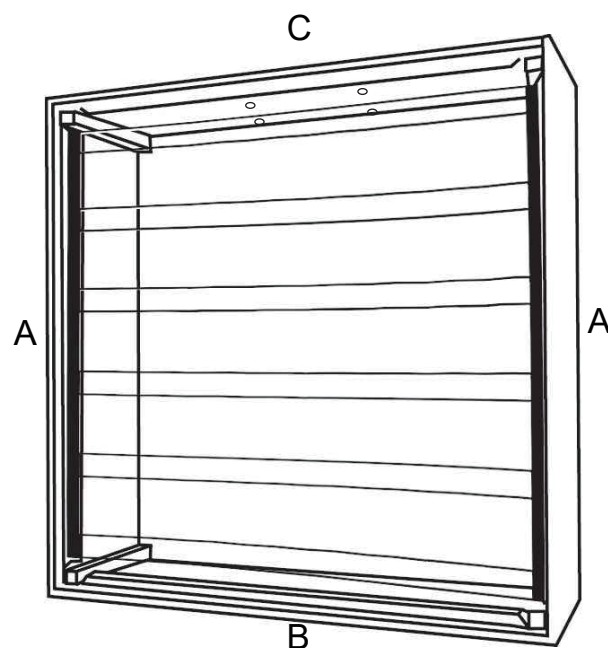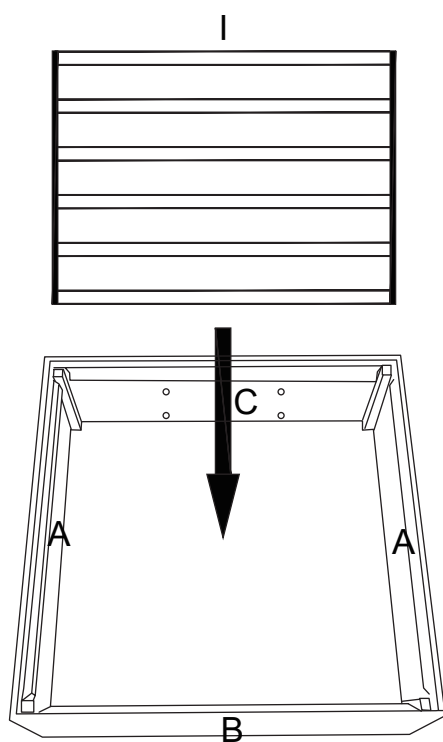

Step 5

Put the seat cushion cover F to the seat frame.


NOTE: Don't pull the seat cushion cover all the way down.

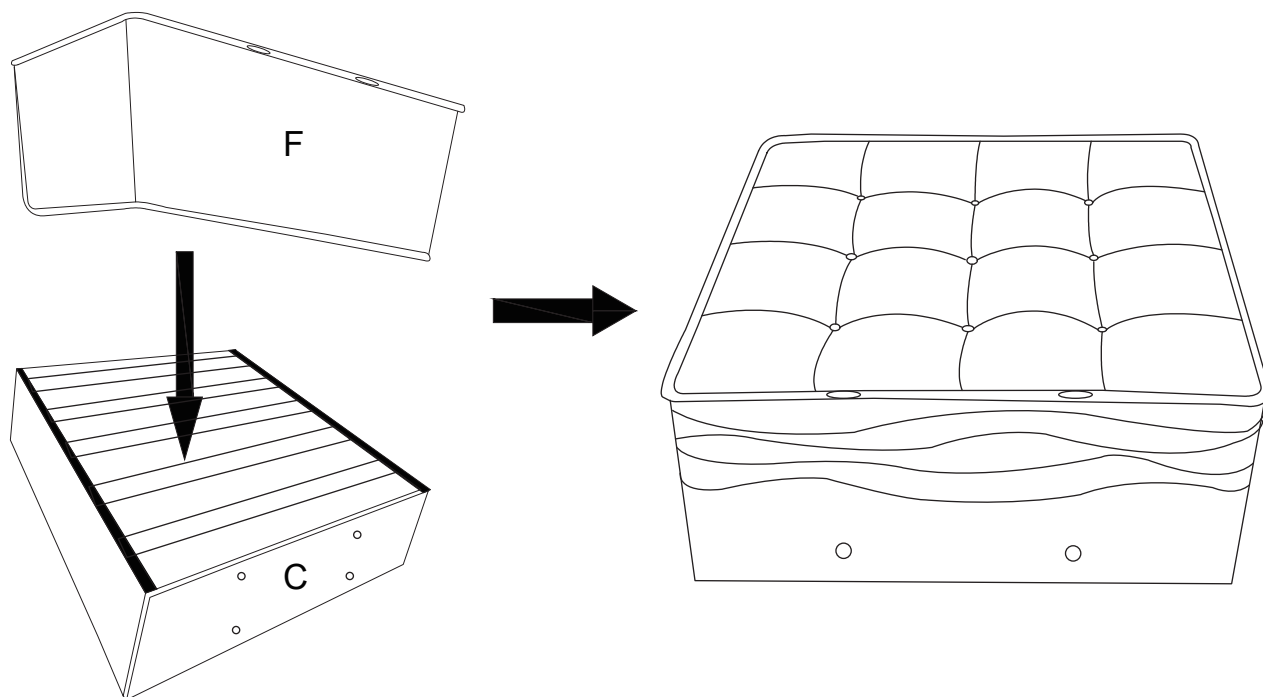

Step 6


Install the back steel plate G to the back E with screws J and washers L.

NOTE: The screws don't need to be tightened too much.

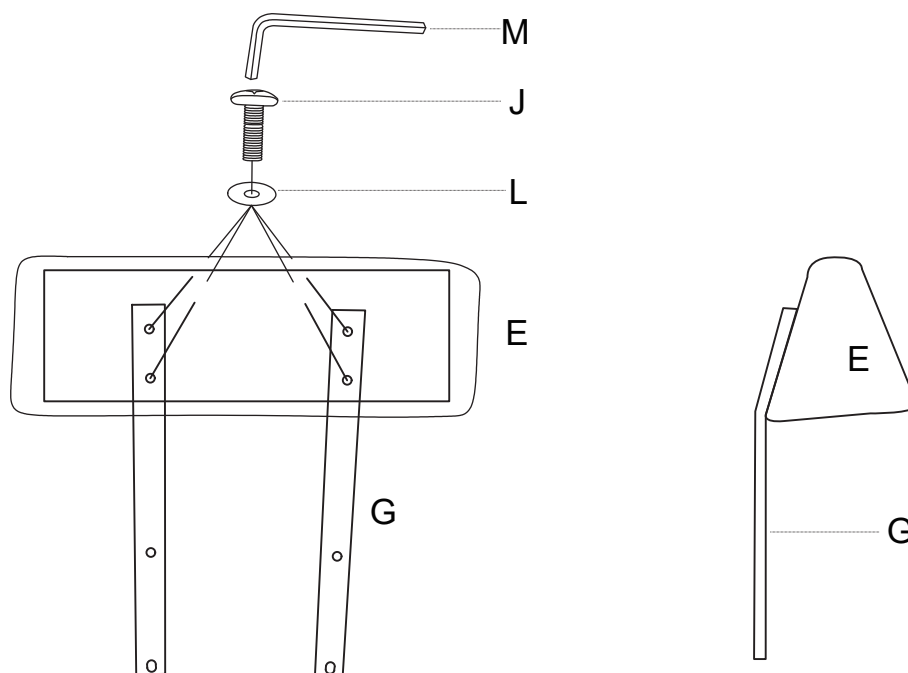


Step 7

Install the back steel plate G to the back long panel C with screws J and washers L.

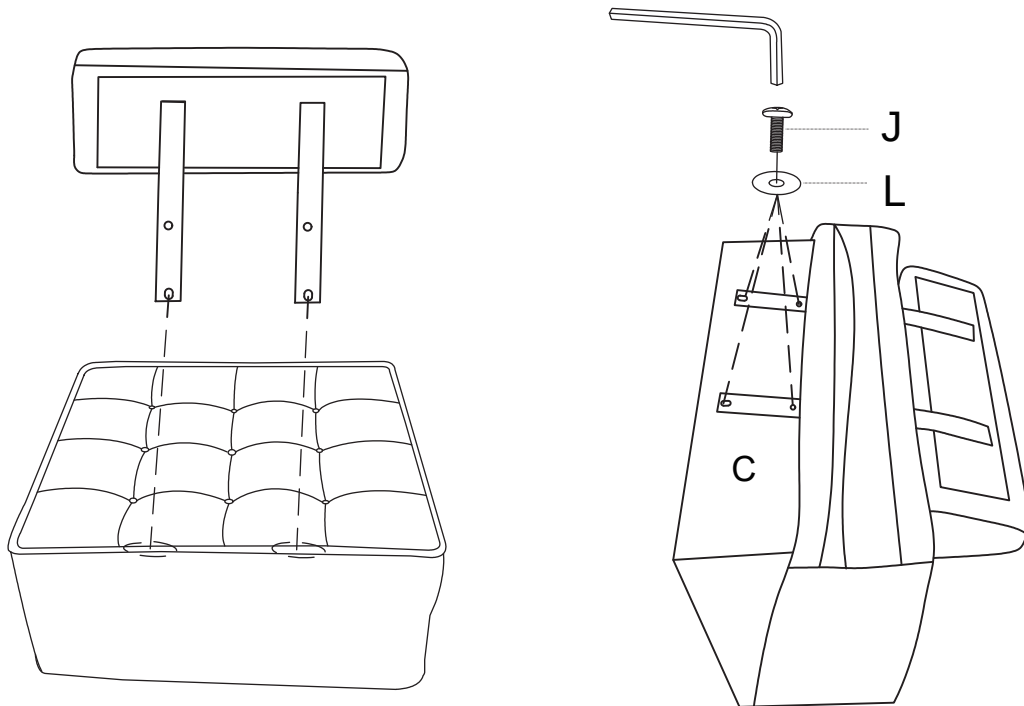


Step 8

Stick the bottom of seat cushion to the plate together.

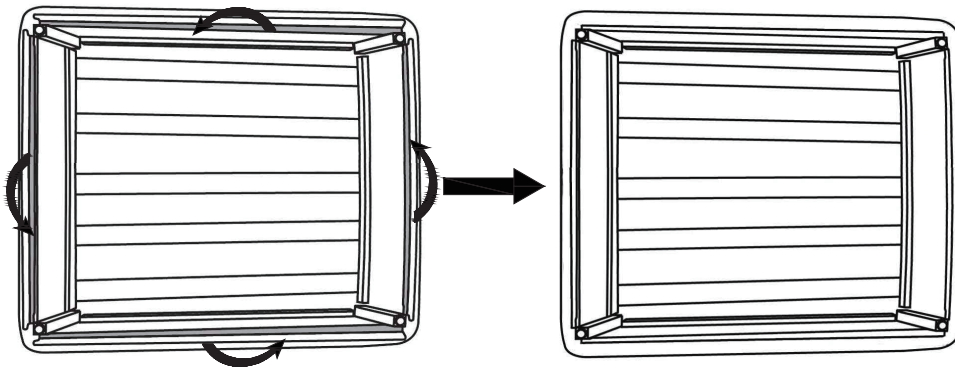

Step 9

Put the back cushion H on the back E.

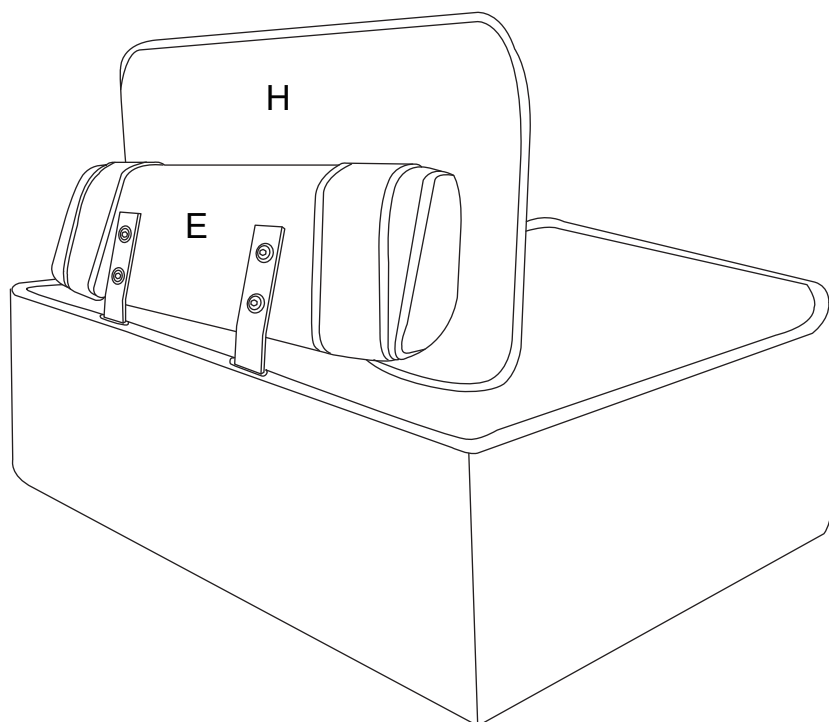

Step 10

Complete.

