


Floor Lamp

■ Specification:

Voltage: 110-130V
Material: Metal, Wood, Fabric
Wattage: 15 Watt Max. LED X 2
Lamp Holder: E26 Base X 2
(LED bulbs included)
Bulb info: A19-9W LED-3000K
Switch Type: Foot On/Off
Item Weight : 2.35 kgs/5.17lbs
Dimensions: 53.75in/1365mm(H)
12.8in/325mm(W)
Wire Length: 70.87in/1800mm
Shade Size: 9.84in/250mm(D)
50.59in/1285mm(H)
Base Size: 12.8in/325mm(W)
12.6in/320mm(H)
Usage: Indoor Use Only

■ Package Includes:

1 X Lamp shade
1 X Finial
1 X Top ring
4 X Lamp tube
1 X Bottom ring
2 X Wood base
1 X Butterfly nut
2 X Type A19 9W Led bulb
1 X User manual

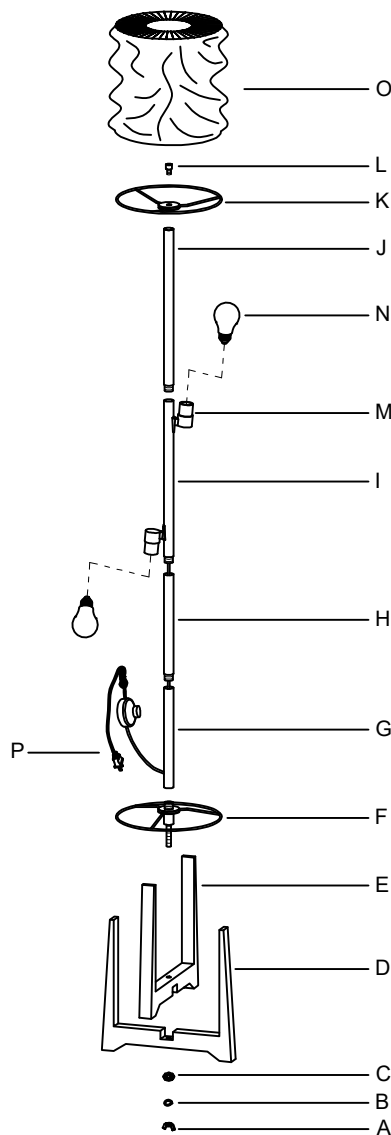

■ Attention:

1. Please make sure the foot on/off switch on the wire be turned on , otherwise the lamp will not work.
2. To reduce the risk of fire, only LED bulbs less than 15W are greatly recommended. No incandescent light bulbs allowed.
3. The bulb will increase the brightness when it is reaching its life span or has partial short circuit. At that moment, please switch off, change a bulb and use it as you would normally.
4. Please shut off the power and unplug it before you screw in a new bulb.
5. Don't put the lamp in overheating working condition or cast it into fire.

PRINTED IN CHINA

EASY INSTALLATION

Carefully remove all parts from box and remove all plastic covering from lamp parts. Lay out all lamp parts from box and put them on a flat surface.

1. Screw tube (J) onto tube (I), screw tube (I) onto tube (H), screw tube (H) onto tube (G), and screw tube (G) onto bottom ring (F). (As Fig.1 shown.)

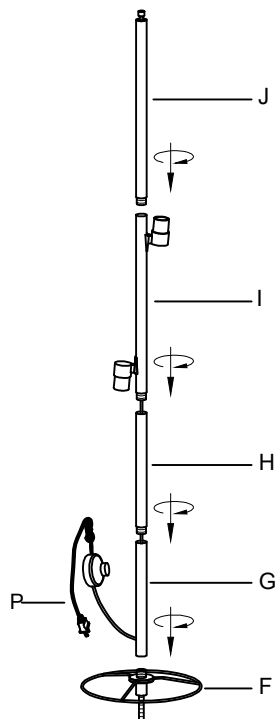


Fig . 1

3. Unscrew the pre-assembled finial (L) from tube (J). Place metal top ring (K) onto tube (J), and secure it with finial (L). Install the bulbs (N) into the sockets (M). (Bulbs included) (As Fig.3 shown)

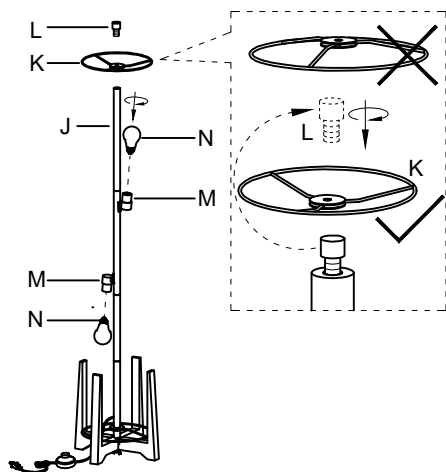


Fig . 3

2. Unscrew the pre-assembled butterfly nut (A) from bottom ring (F). Place base (E) onto base (D), make sure the pipe of bottom ring (F) go through base (E) and (D), and secure them with teeth ring (C), spring ring (B), and the butterfly nut (A). And make the cord (P) go through the bottom ring (F). (As Fig.2 shown.)

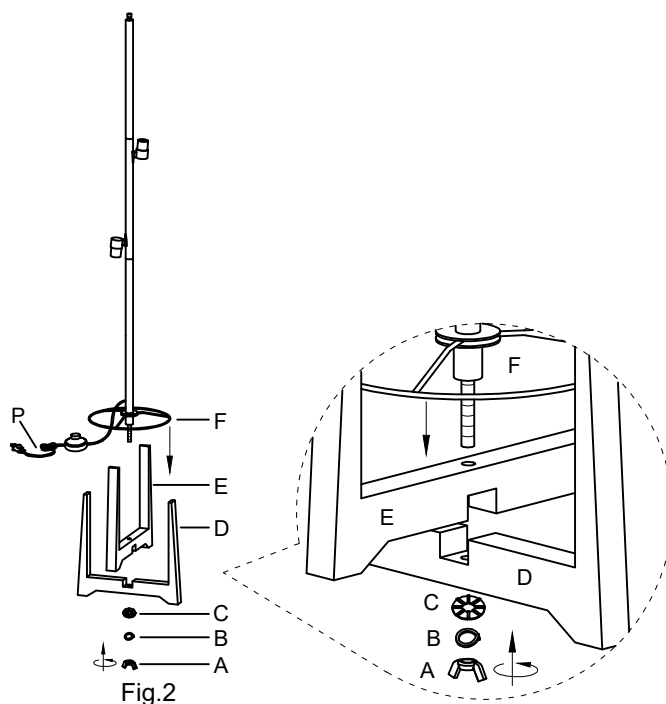


Fig.2

4. Place the shade (O) over metal top ring (K), attach the bottom of shade to bottom ring (F) to steady the lamp shade, and make the adjustment. (As Fig.4 shown).Lamp assembly is completed.

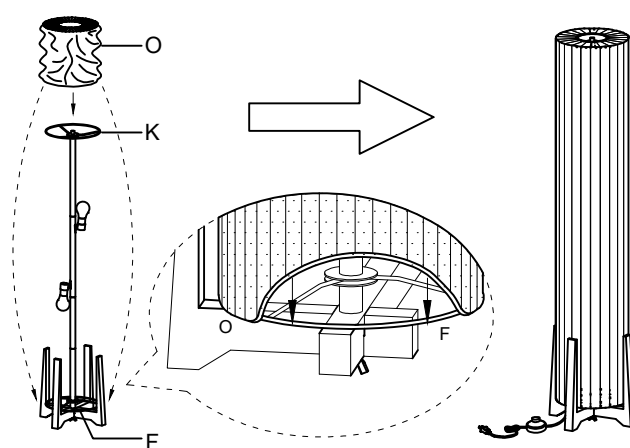


Fig . 4

IMPORTANT SAFETY INSTRUCTIONS:

This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug. Indoor use only.