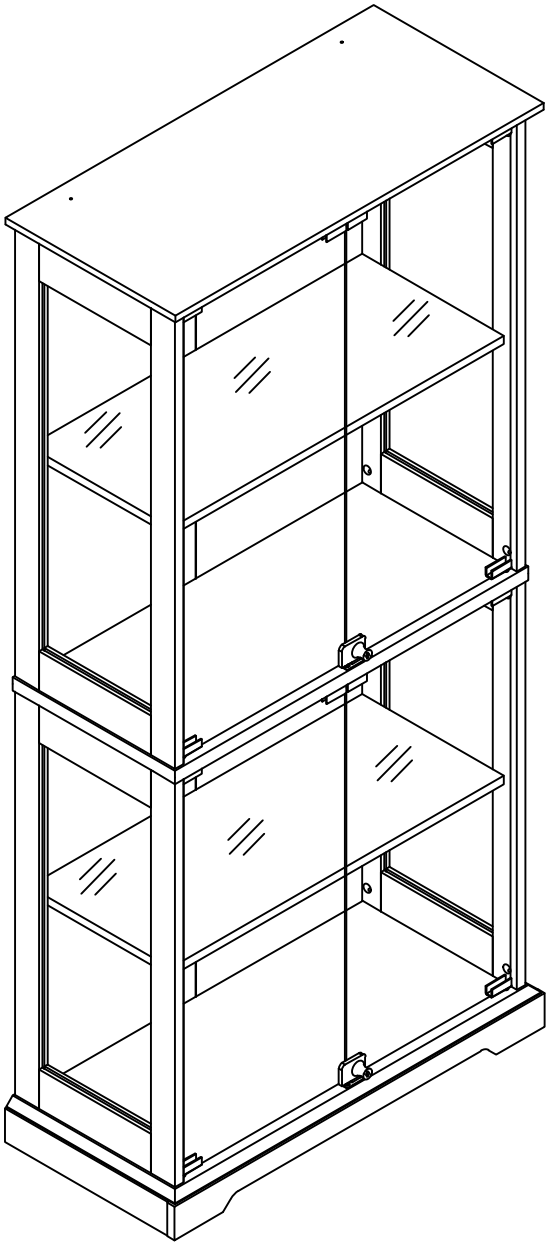


ATTENTION

If there is any missing, please kindly send us messages to let us know the part number of missing part regarding to the first page of instructions.

Please also provide your full address, recipient name and contact phone number so that we can send replacement to you as soon as possible.

Children have died from furniture tipover. To reduce the risk of furniture tipover. ALWAYS install tipover restraint provided.

# BEFORE STARTING


## Before Using Product

- Read each step carefully before starting.It is very important thateach step is performed in the correct order.If these steps are not followed in sequence,assembly difficulties will occur.
- Make sure all parts are included.
- Work in a spacious area and near where the unit will be used,preferably on a carpet,or use a piece of the cardboard packaging to protect your floor and product.
- For a smooth assembly process,we suggest you keep a lite tightness for all the screws during assembly.After the whole product is assembled, firmly tighten all the screws.

## ⚠ WARNING


- Do not allow children to climb on unit.
- Avoid sharp objects or corrosive chemicals to prevent damage to the product.
- During assembly,keep parts and packaging materials away from children and pets as there could be potential injury and choking hazards.
- Please make sure that all objects are removed before moving the assembled unit.
- The unit must be team lifted,not dragged or pushed.Failure to do so could cause instability,product collapse,and/or serious injury.
- Be careful when using power tools to assemble your furniture.Power tools may strip or damage the parts.

# QUICKFIT

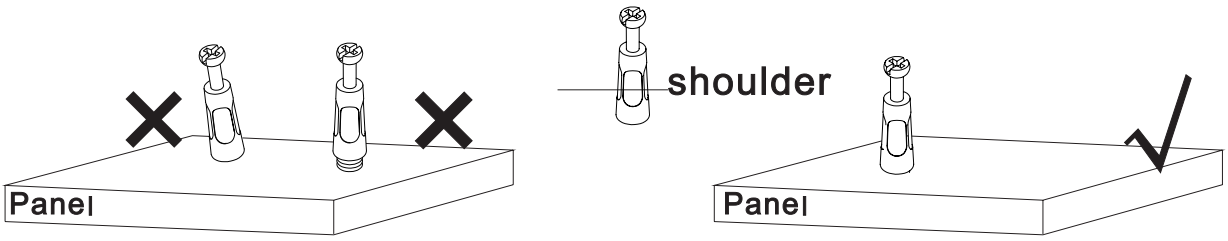



Tighten quickfit until shoulder is flush with panel. Do not overtighten or undertighten.

# CAM LOCK

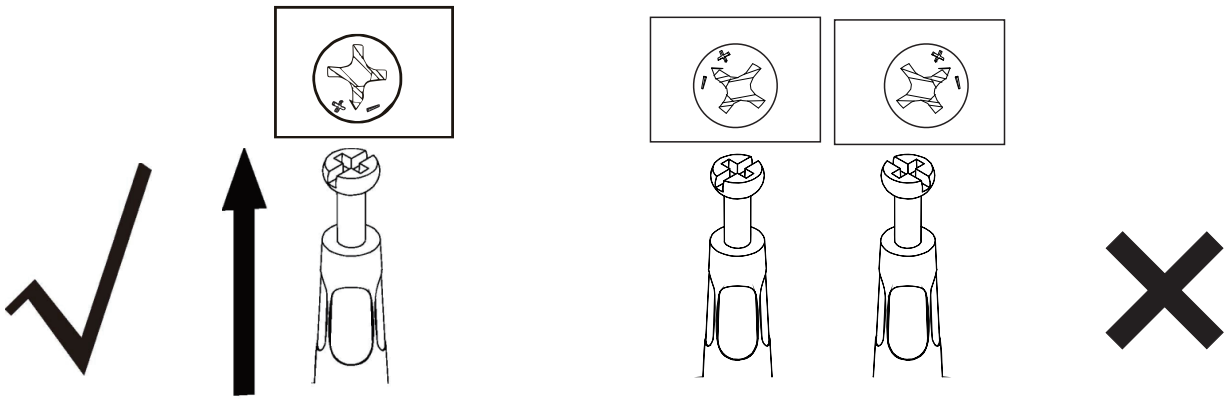


CORRECT WRONG

When fitting cam lock, ensure starting positions is correct before you insert cam lock to quickfit.

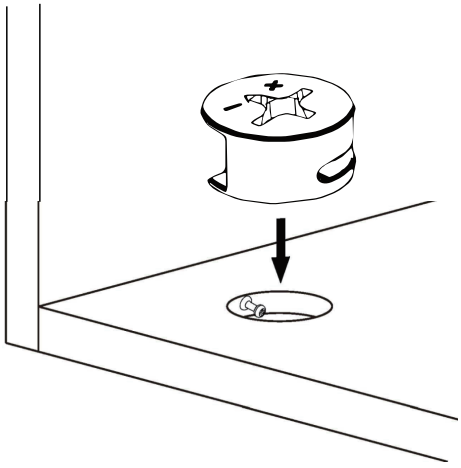


Quickfit head should be in the center of the cam lock. When the two panels are joined. Cam lock should be inserted before quickfit.















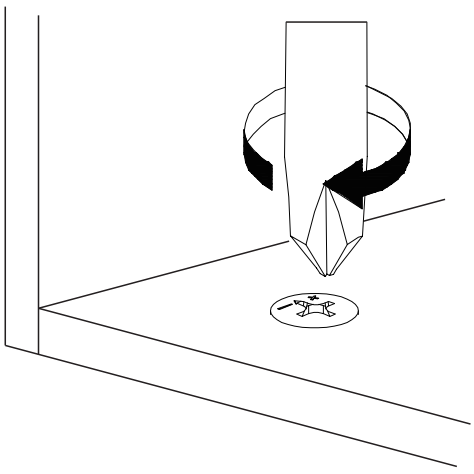


Turn cam lock clockwise to tighten.

# PART LIST

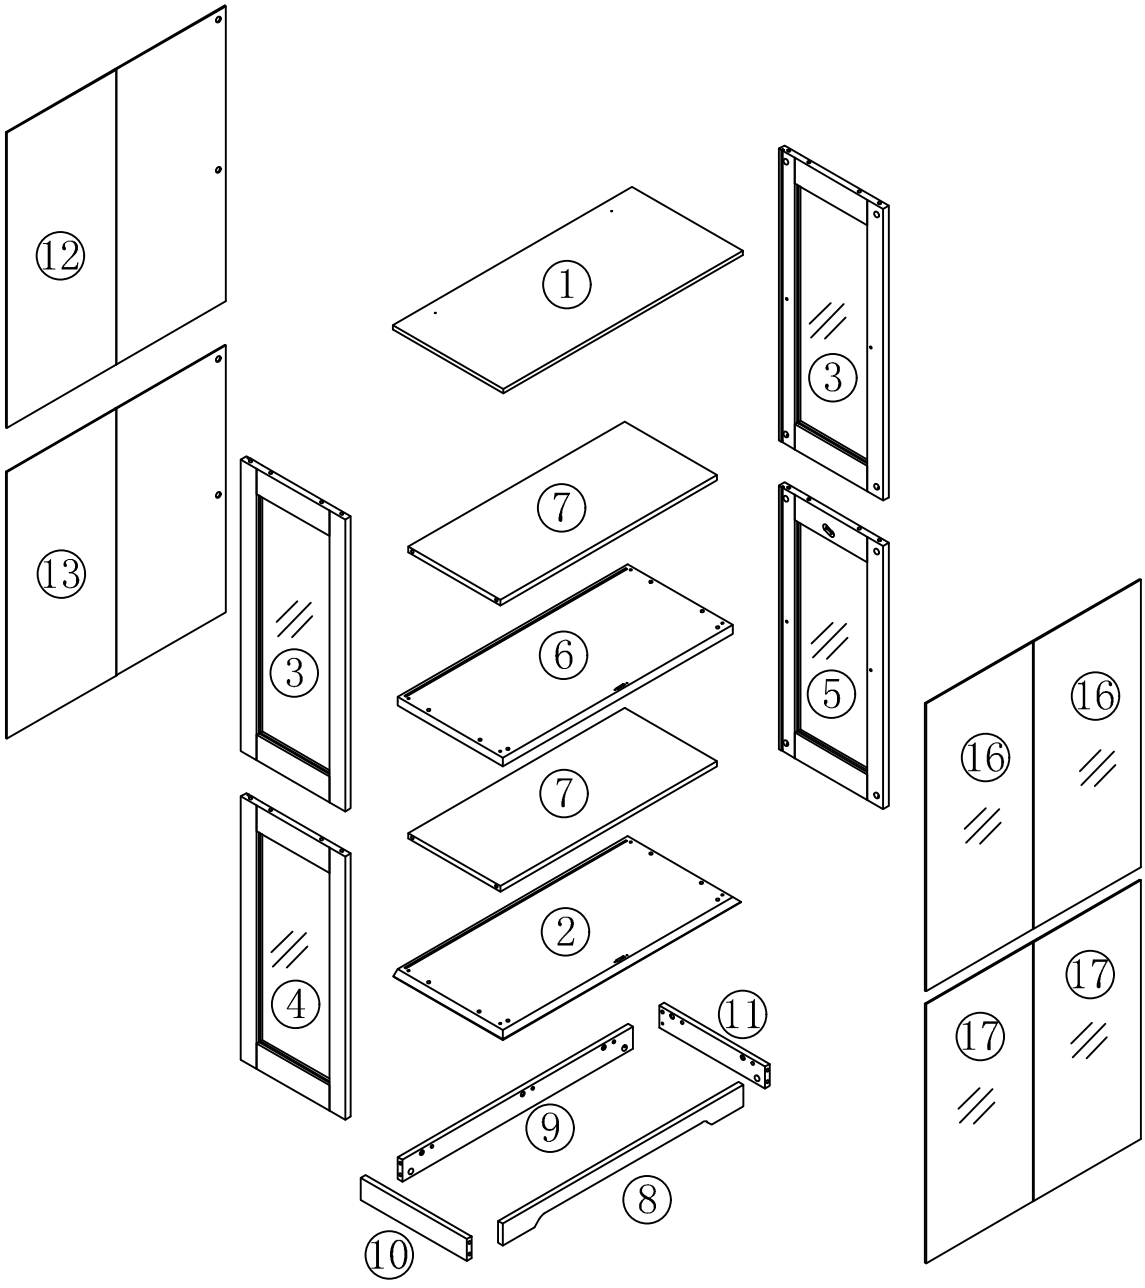


# PART LIST
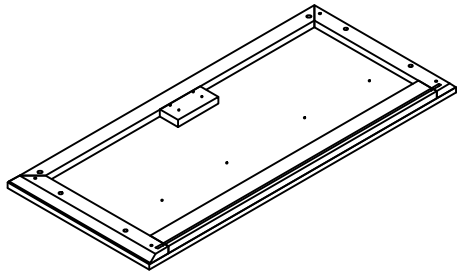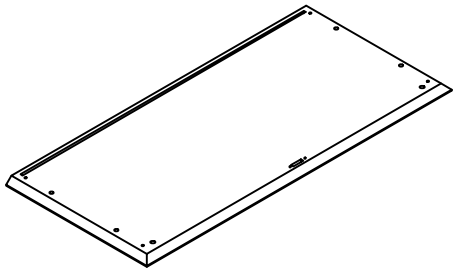
| | | |
|---|---|---|
| ①  1PC | ②  1PC | |
| ③  2PCS | ④  1PC | ⑤  1PC |
| ⑥  1PC | ⑦  2PCS | ⑧  1PC |
| ⑨  1PC | ⑩  1PC | ⑪  1PC |
| ⑫  1PC | ⑬  1PC | ⑯  2PCS |
| ⑰  2PCS | | |

# HARDWARE LIST

**A**



ϕ6X35 (28+2)PCS

**B**



ϕ15X9.5 (28+2)PCS

**C**



ϕ8X30 (20+2)PCS

**D**




(20+2)PCS

**E**




ϕ3X15 (20+2)PCS

**F**





2SET

**G**

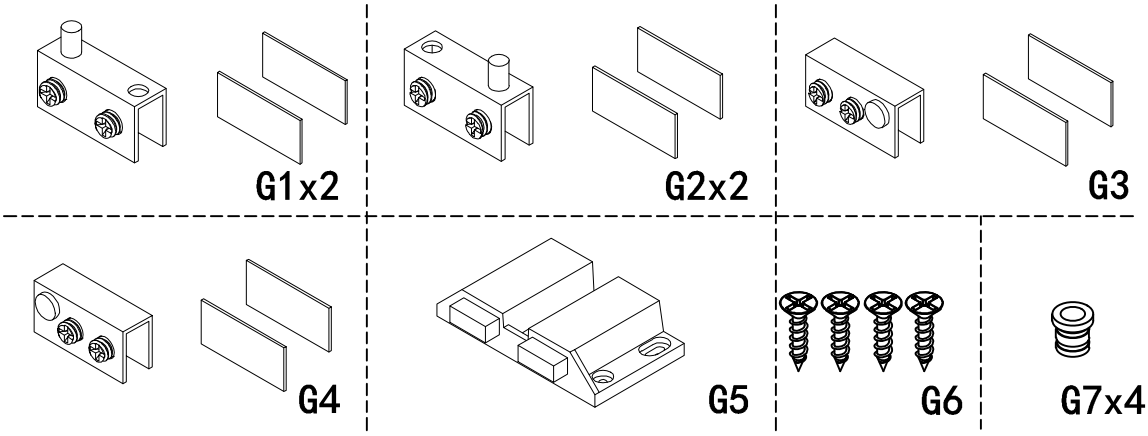



2SET

**H**

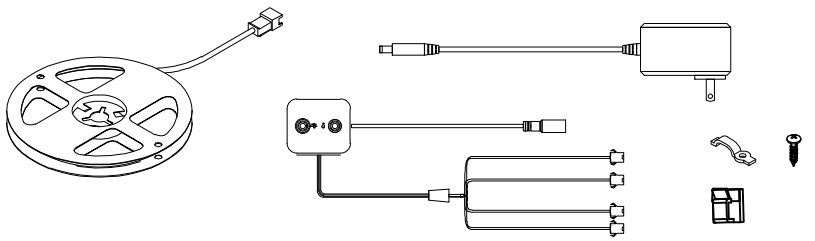

1SET

**I**




2SET

**J**



ϕ3X12 (4+1)PCS

**K**



10PCS

**L**












ϕ1/4*12 (20+2)PCS



1PC



# HARDWARE LIST

## G

| | | | |
|---|---|---|---|
| G1 |  | +  | ×2 |
| G2 |  | +  | ×2 |
| G3 |  | +  | ×1 |
| G4 |  | +  | ×1 |
| G5 |  | | ×1 |
| G6 |  ϕ3X12 | | ×4 |
| G7 |  | | ×4 |

---

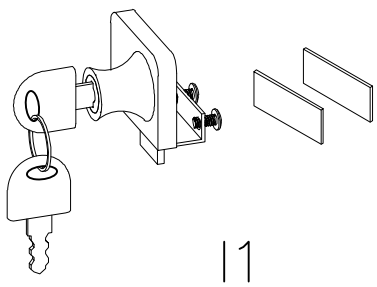


I =  + 

I1 I2

# HARDWARE LIST


## H

H1

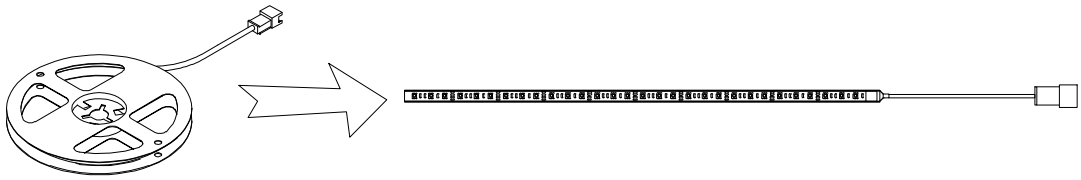


×4

H2

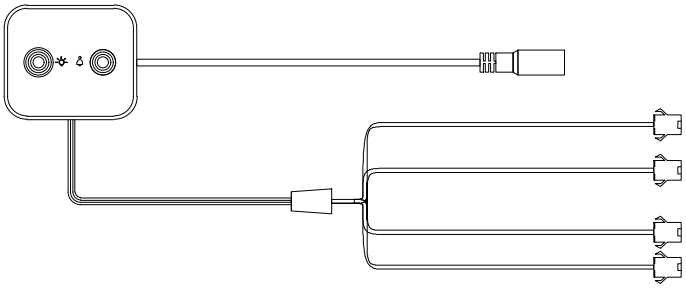


×1

H3




×1

H4



×16

H5



×5

H6




ϕ3X12


×16

---


F =




F1



F2





F3

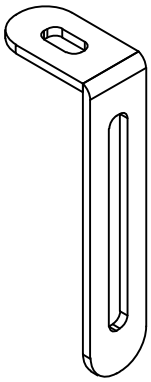

F4

STEP 1

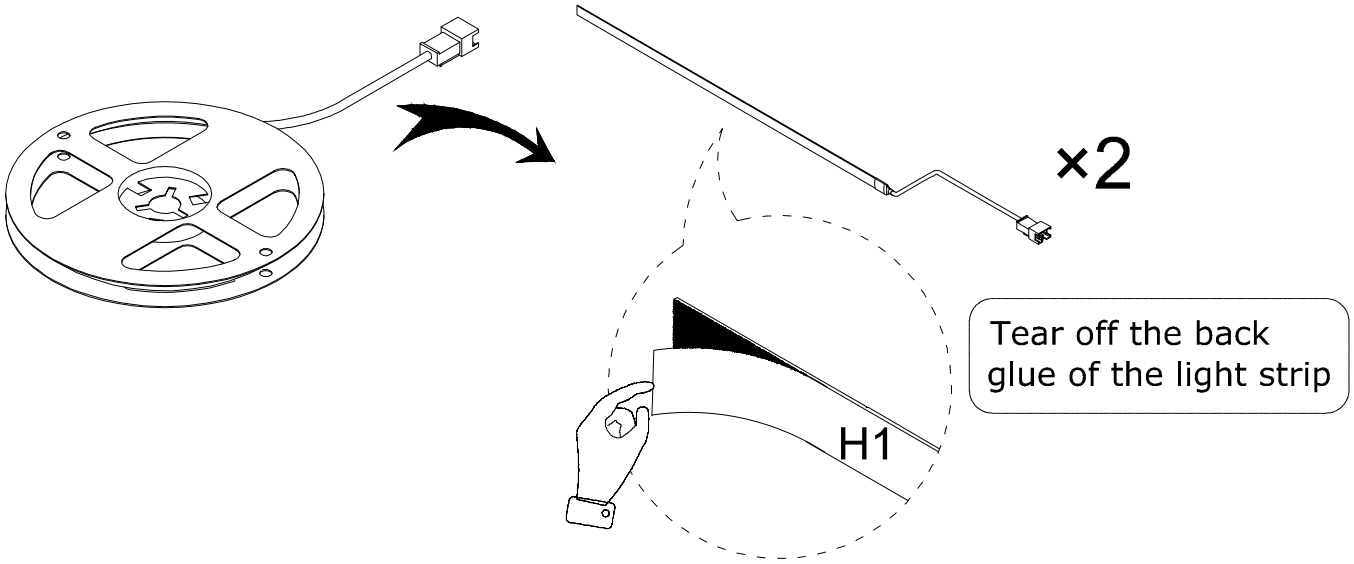


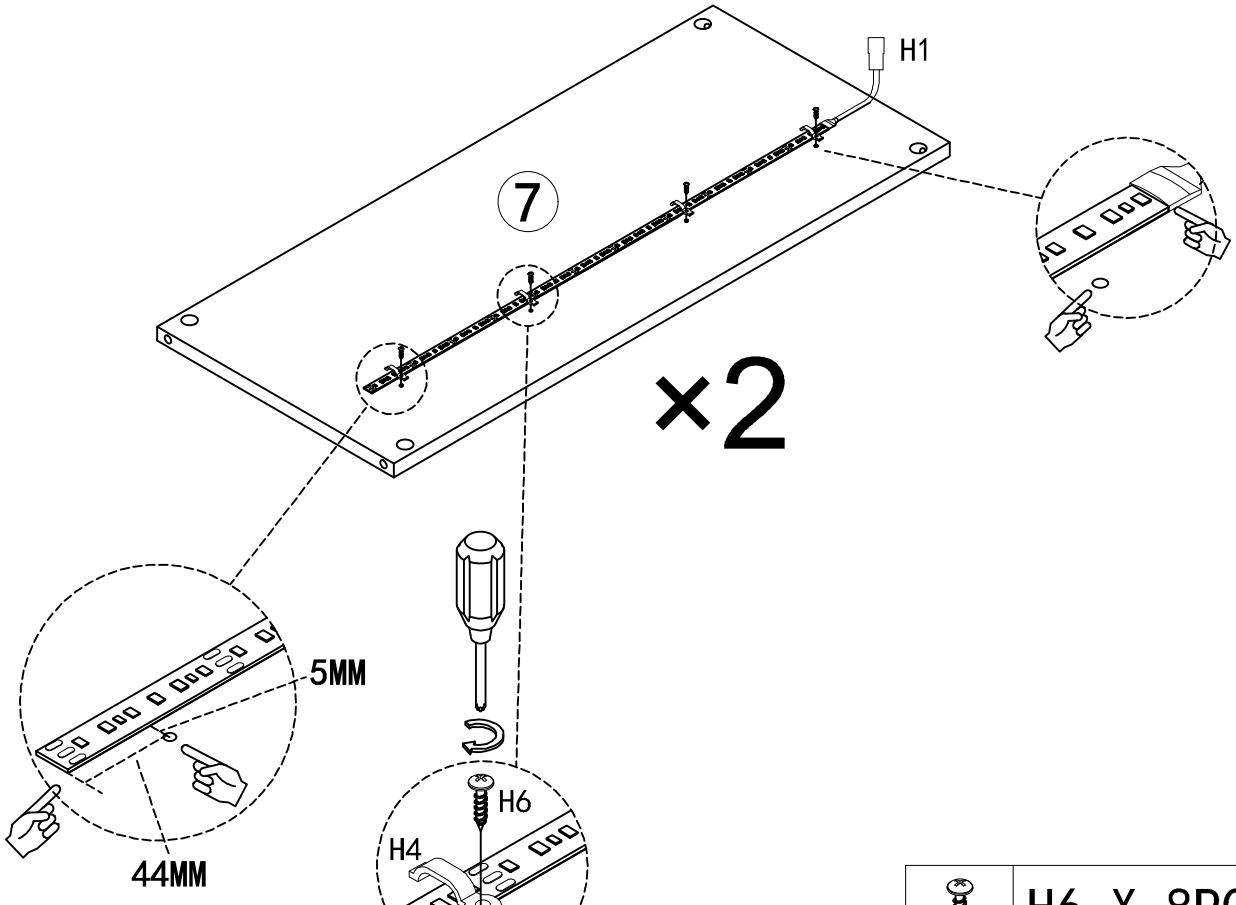
Install the light strip according to the suggested distance


| | |
|---|---|
| | H6 X 8PCS |
| | H4 X 8PCS |
| | H1 X 2PCS |

## STEP 2

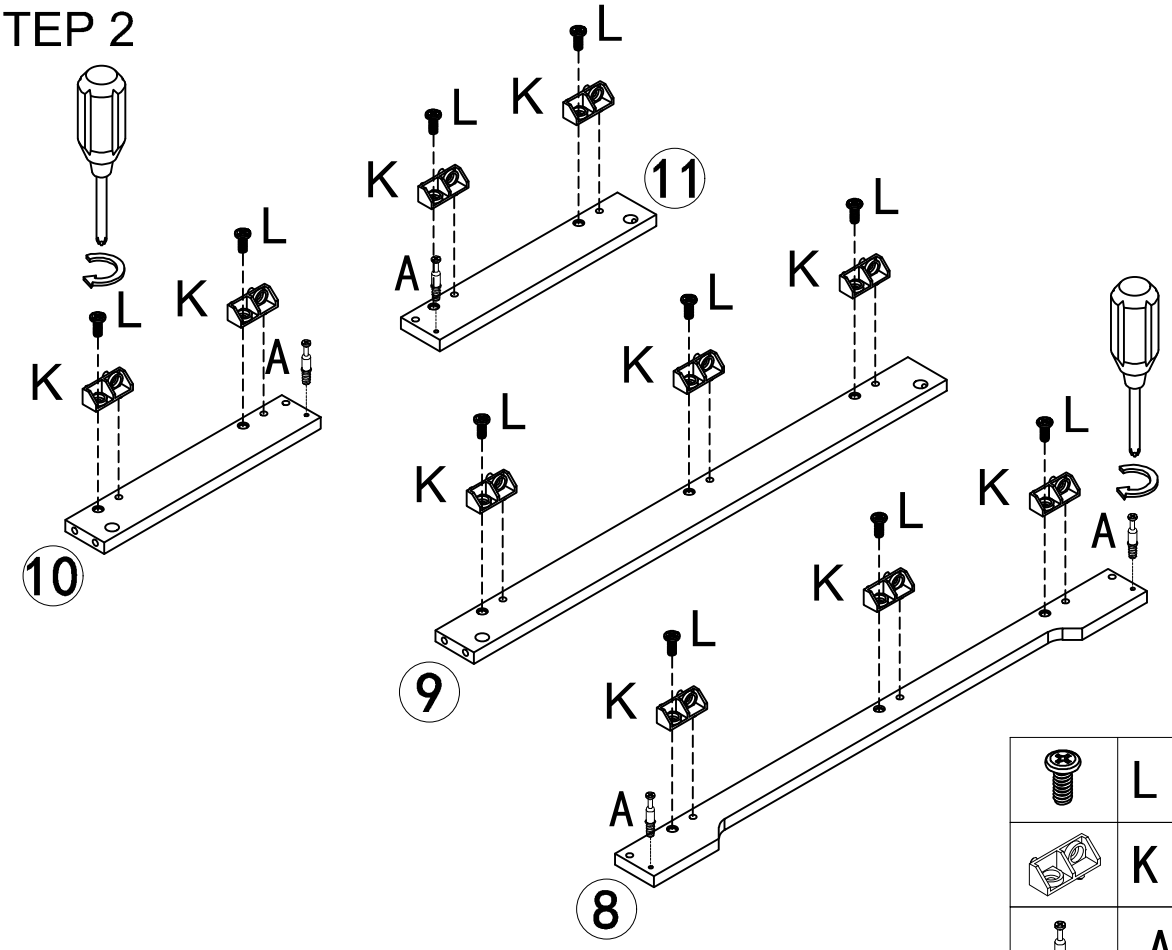



| | |
|---|---|
|  | L X 10PCS |
|  | K X 10PCS |
|  | A X 4PCS |


## STEP 3

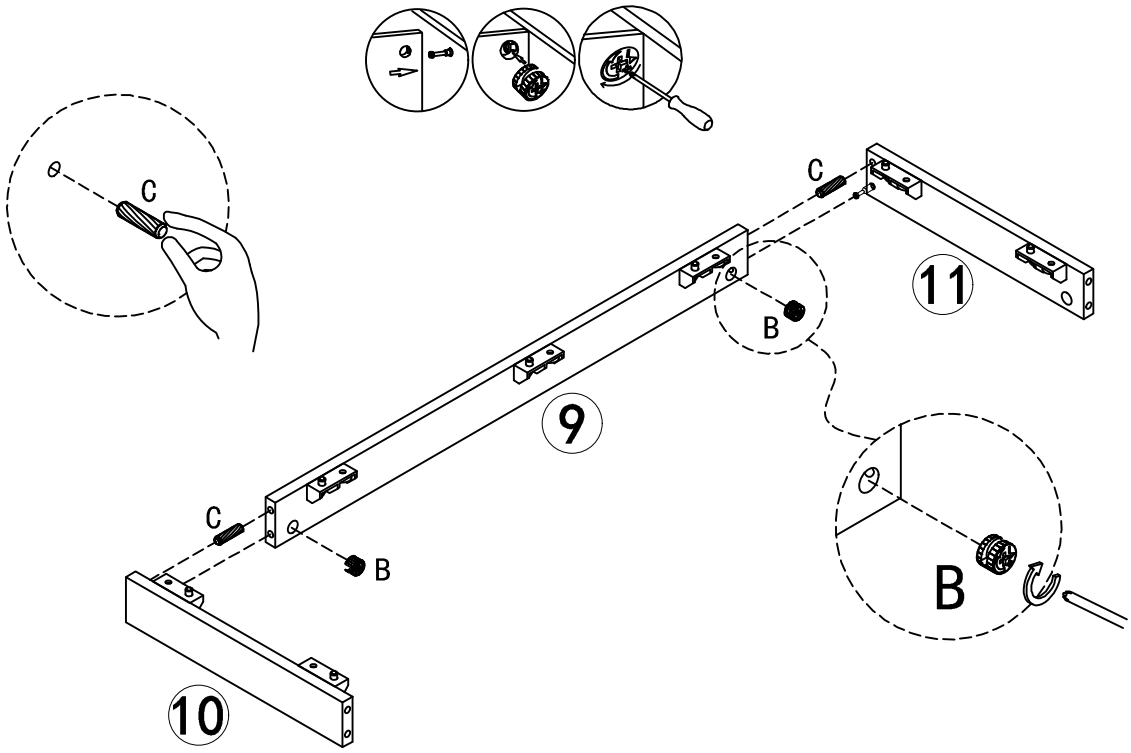



| | |
|---|---|
|  | B X 2PCS |
|  | C X 2PCS |

STEP 4






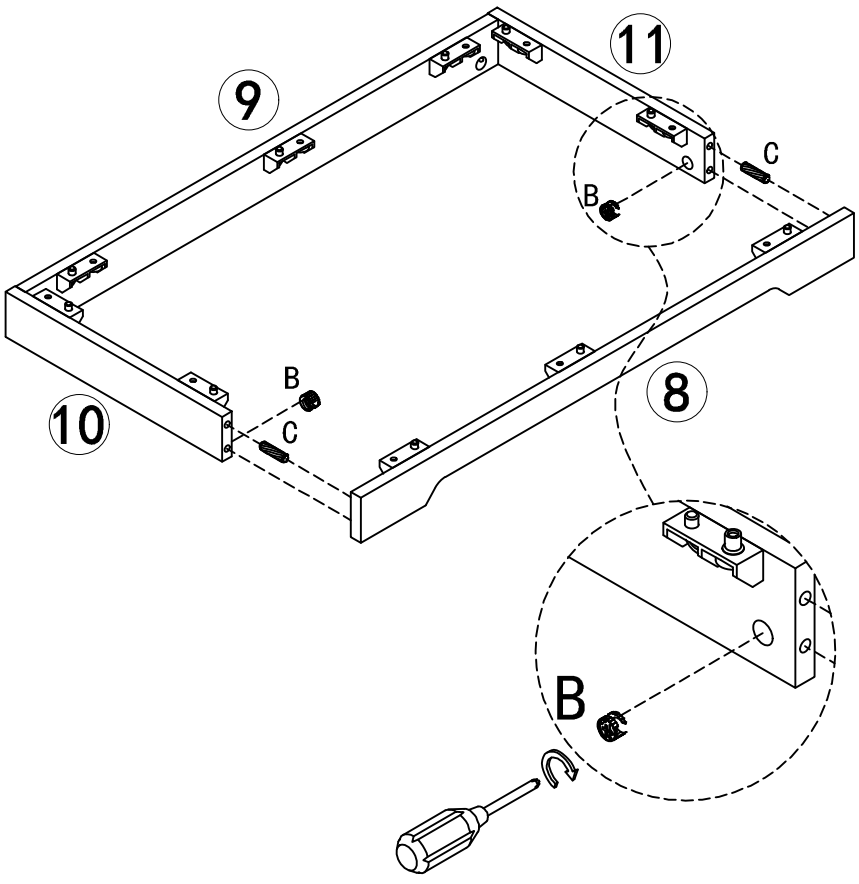

| | |
|---|---|
|  | B X 2PCS |
|  | C X 2PCS |

# STEP 5

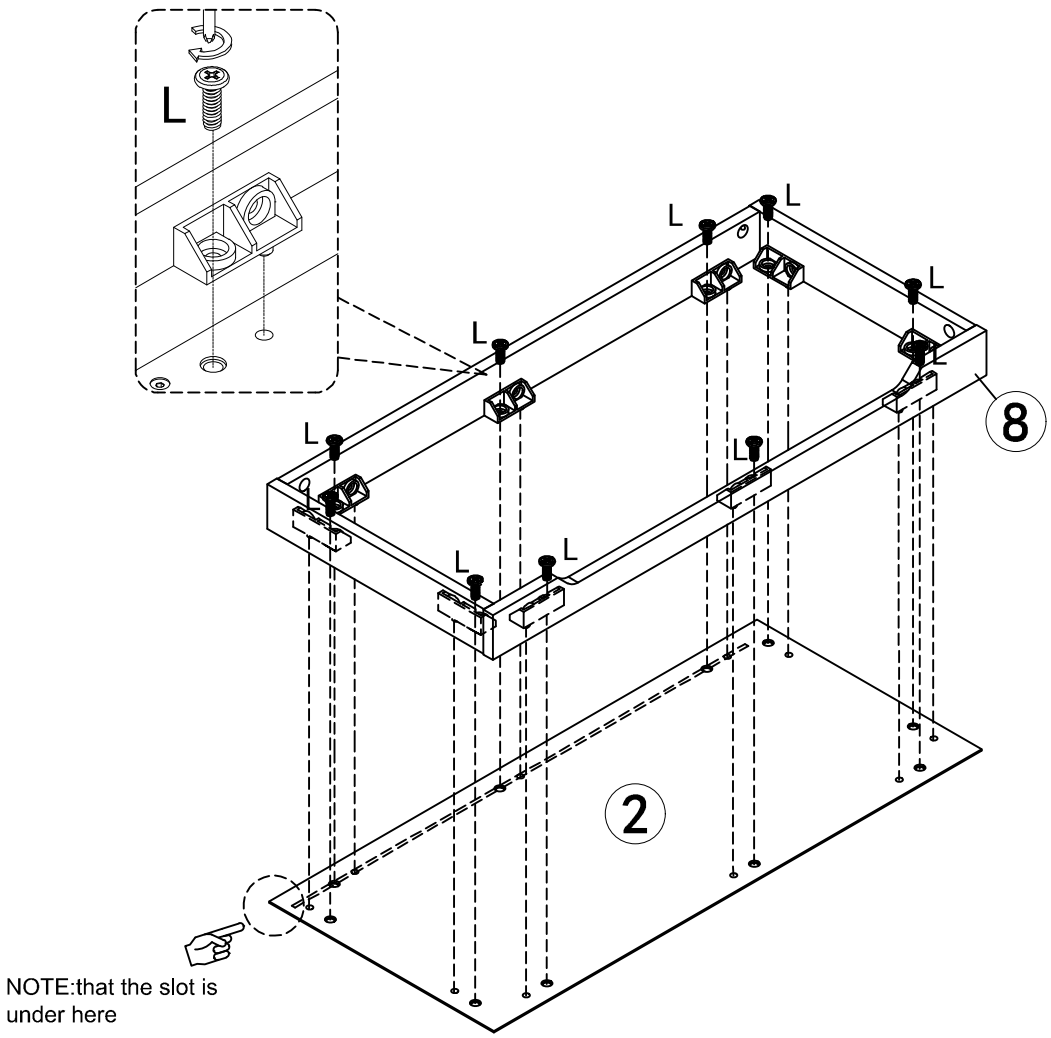



| | |
|---|---|
|  | L X 10PCS |

STEP 6

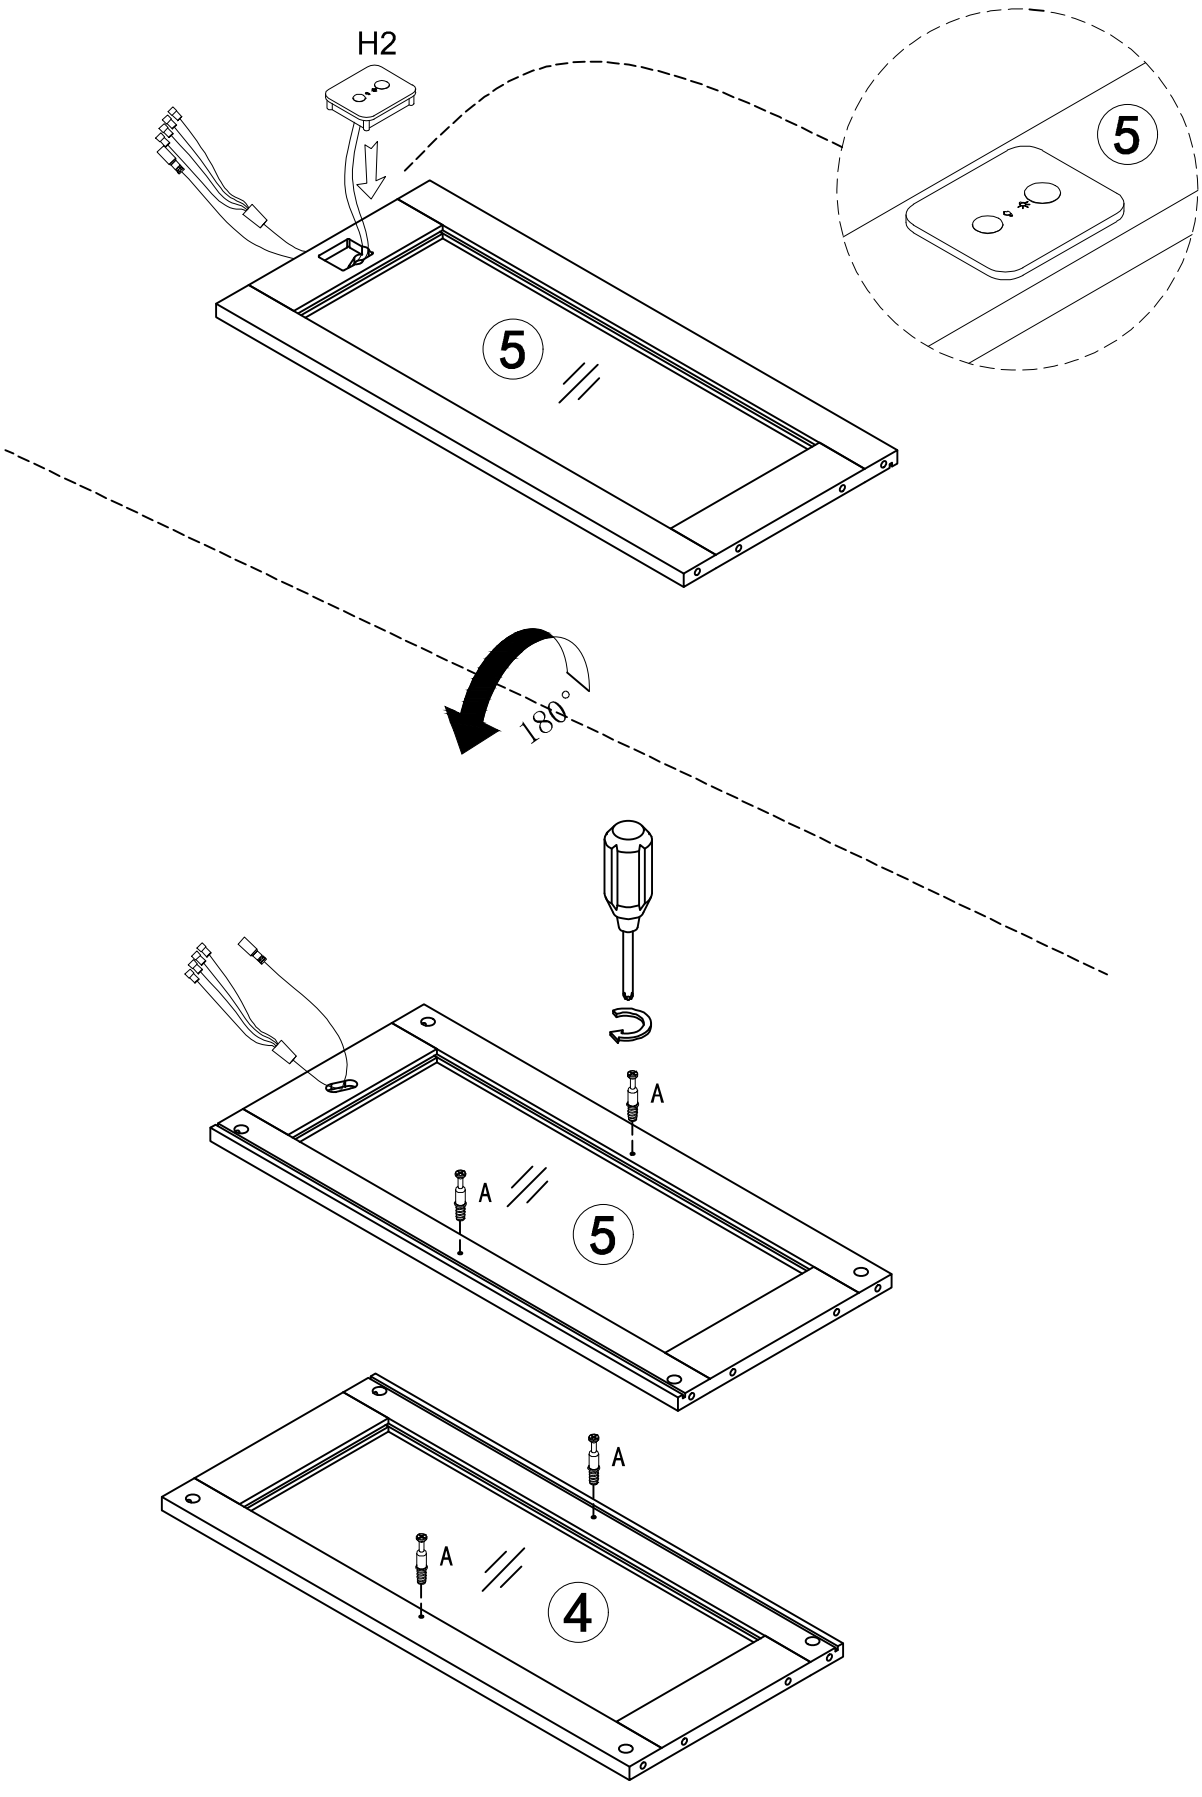



| | |
|---|---|
| | H2 X 1PC |
| | A X 4PCS |

STEP 7

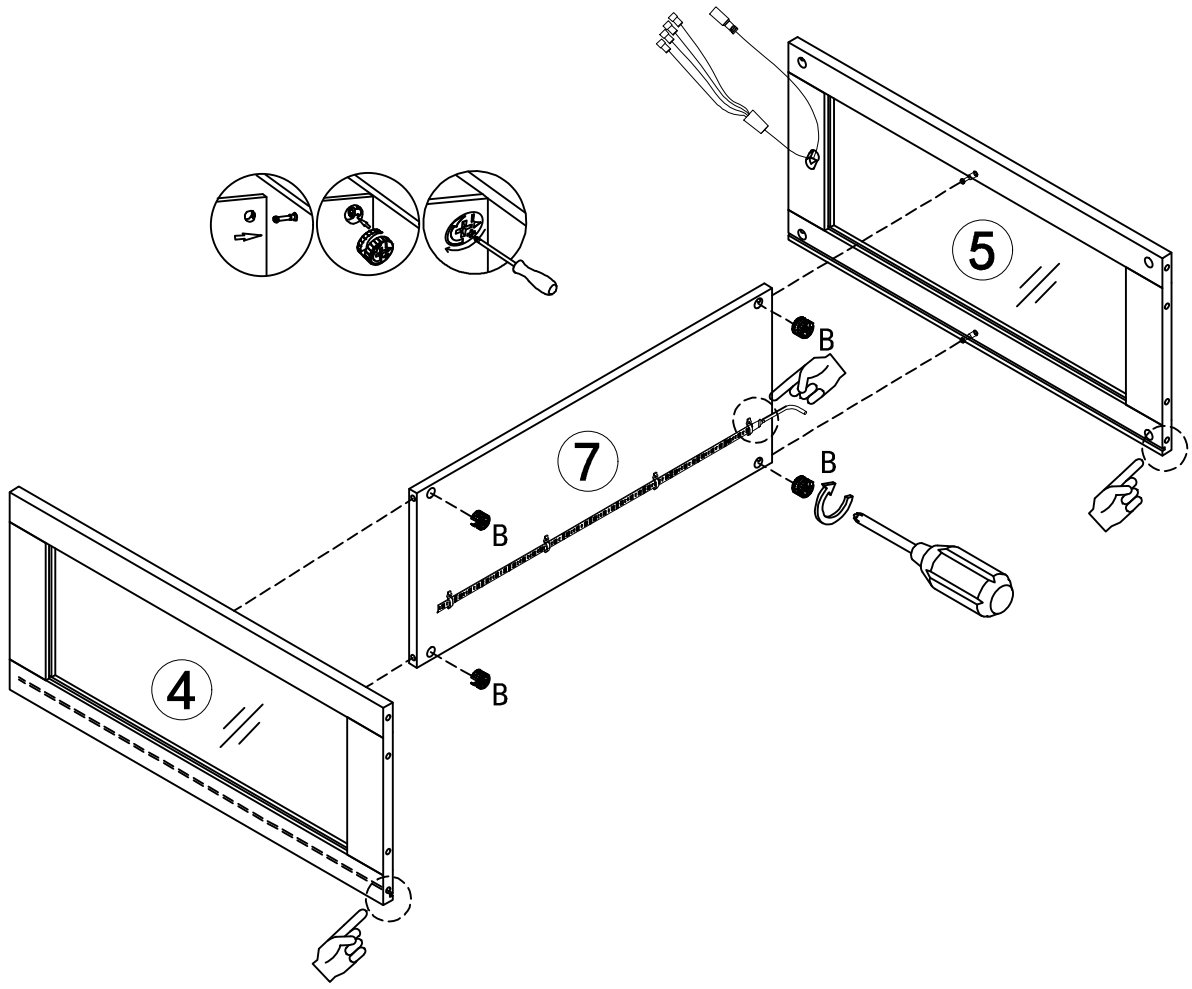



| | |
|---|---|
| | B X 4PCS |

## STEP 8

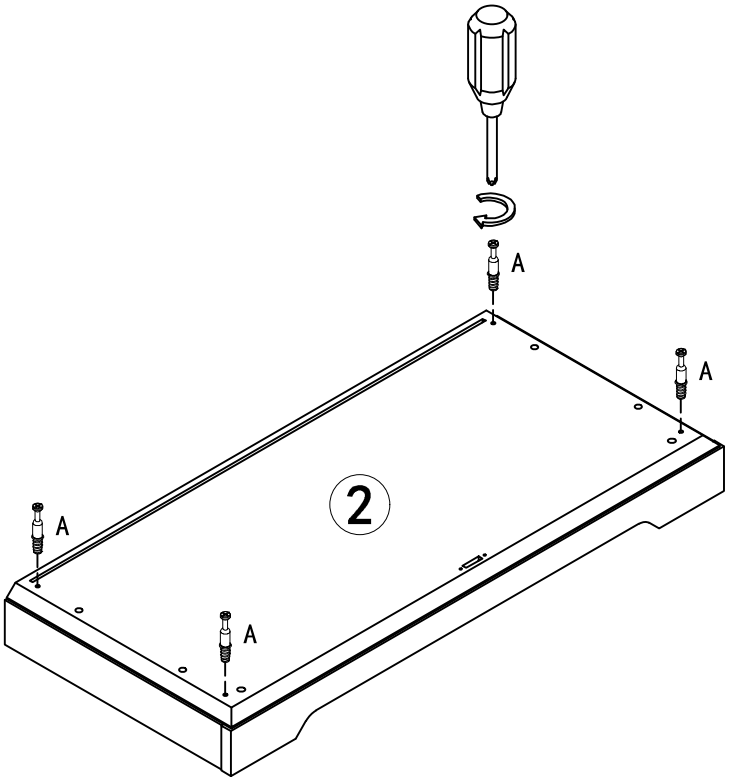



| | |
|---|---|
|  | A X 4PCS |


## STEP 9

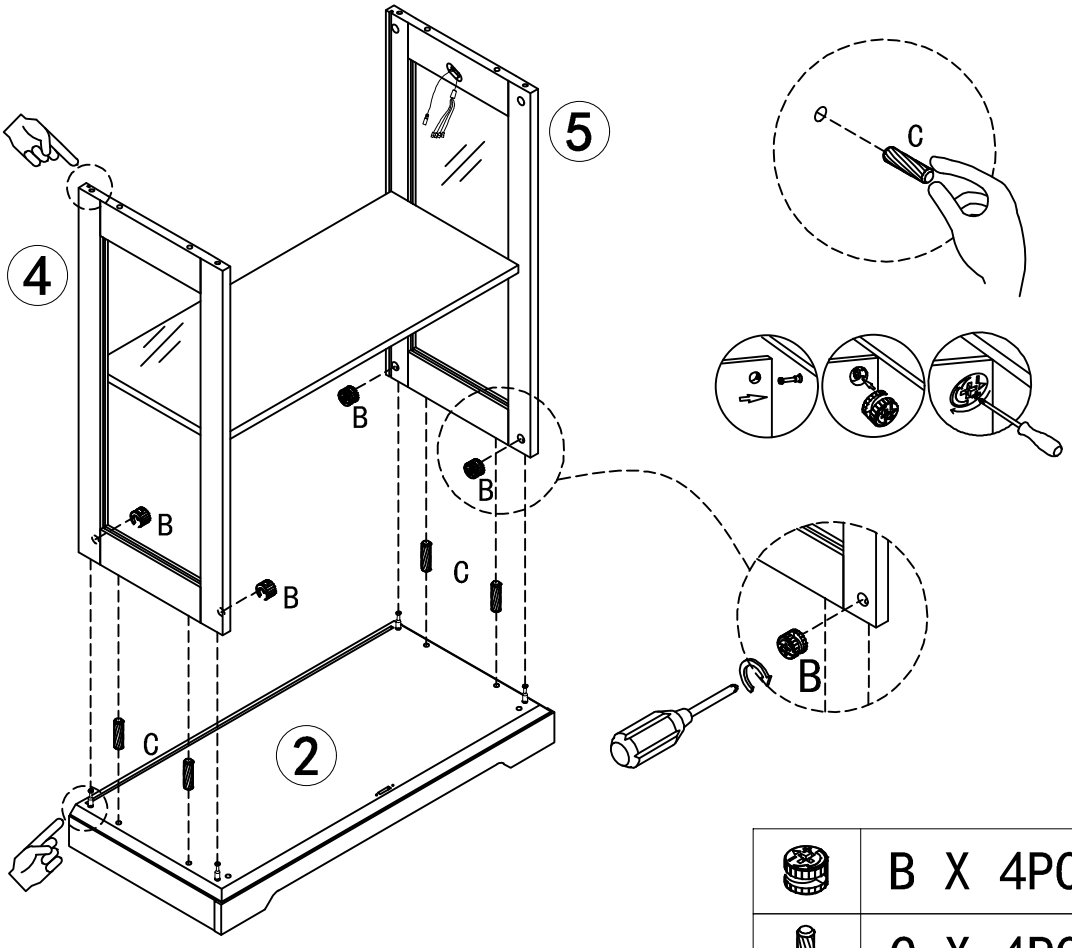



| | |
|---|---|
|  | B X 4PCS |
|  | C X 4PCS |

STEP 10

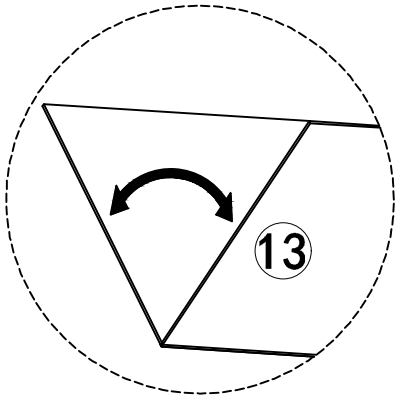

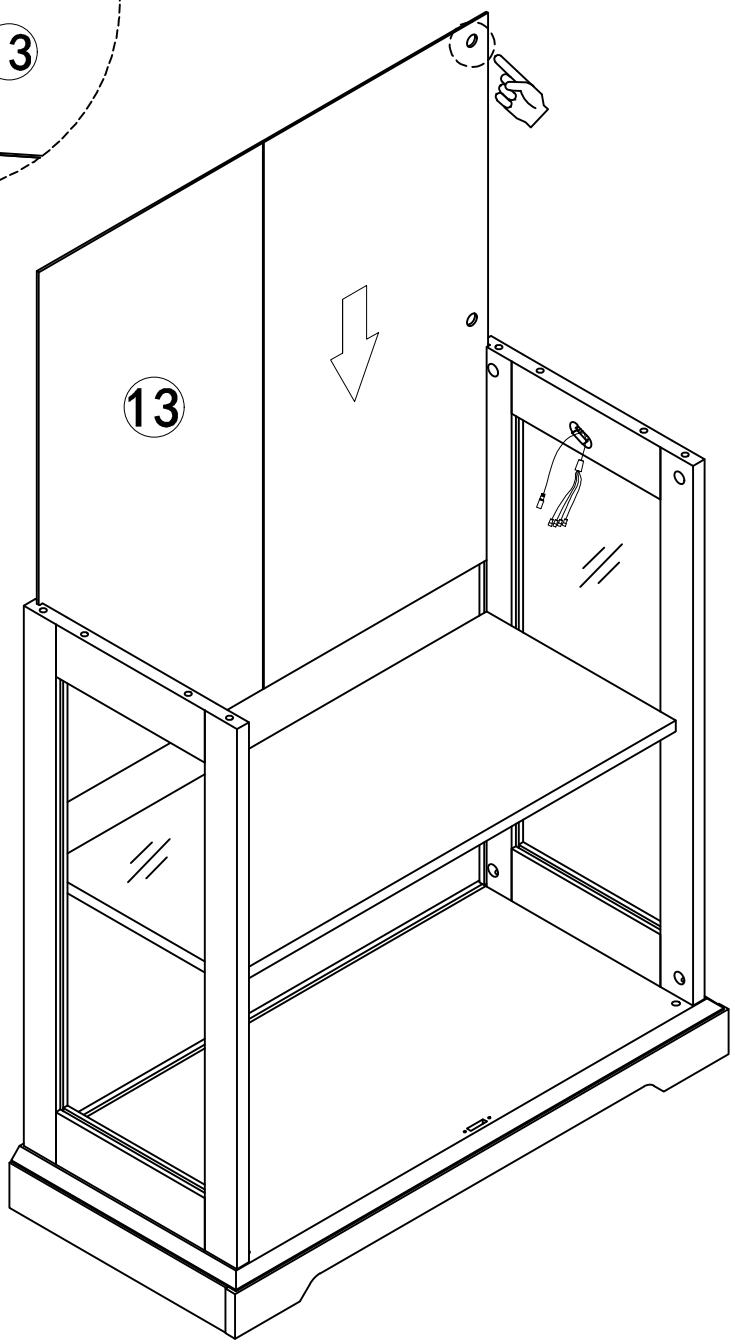
STEP 11

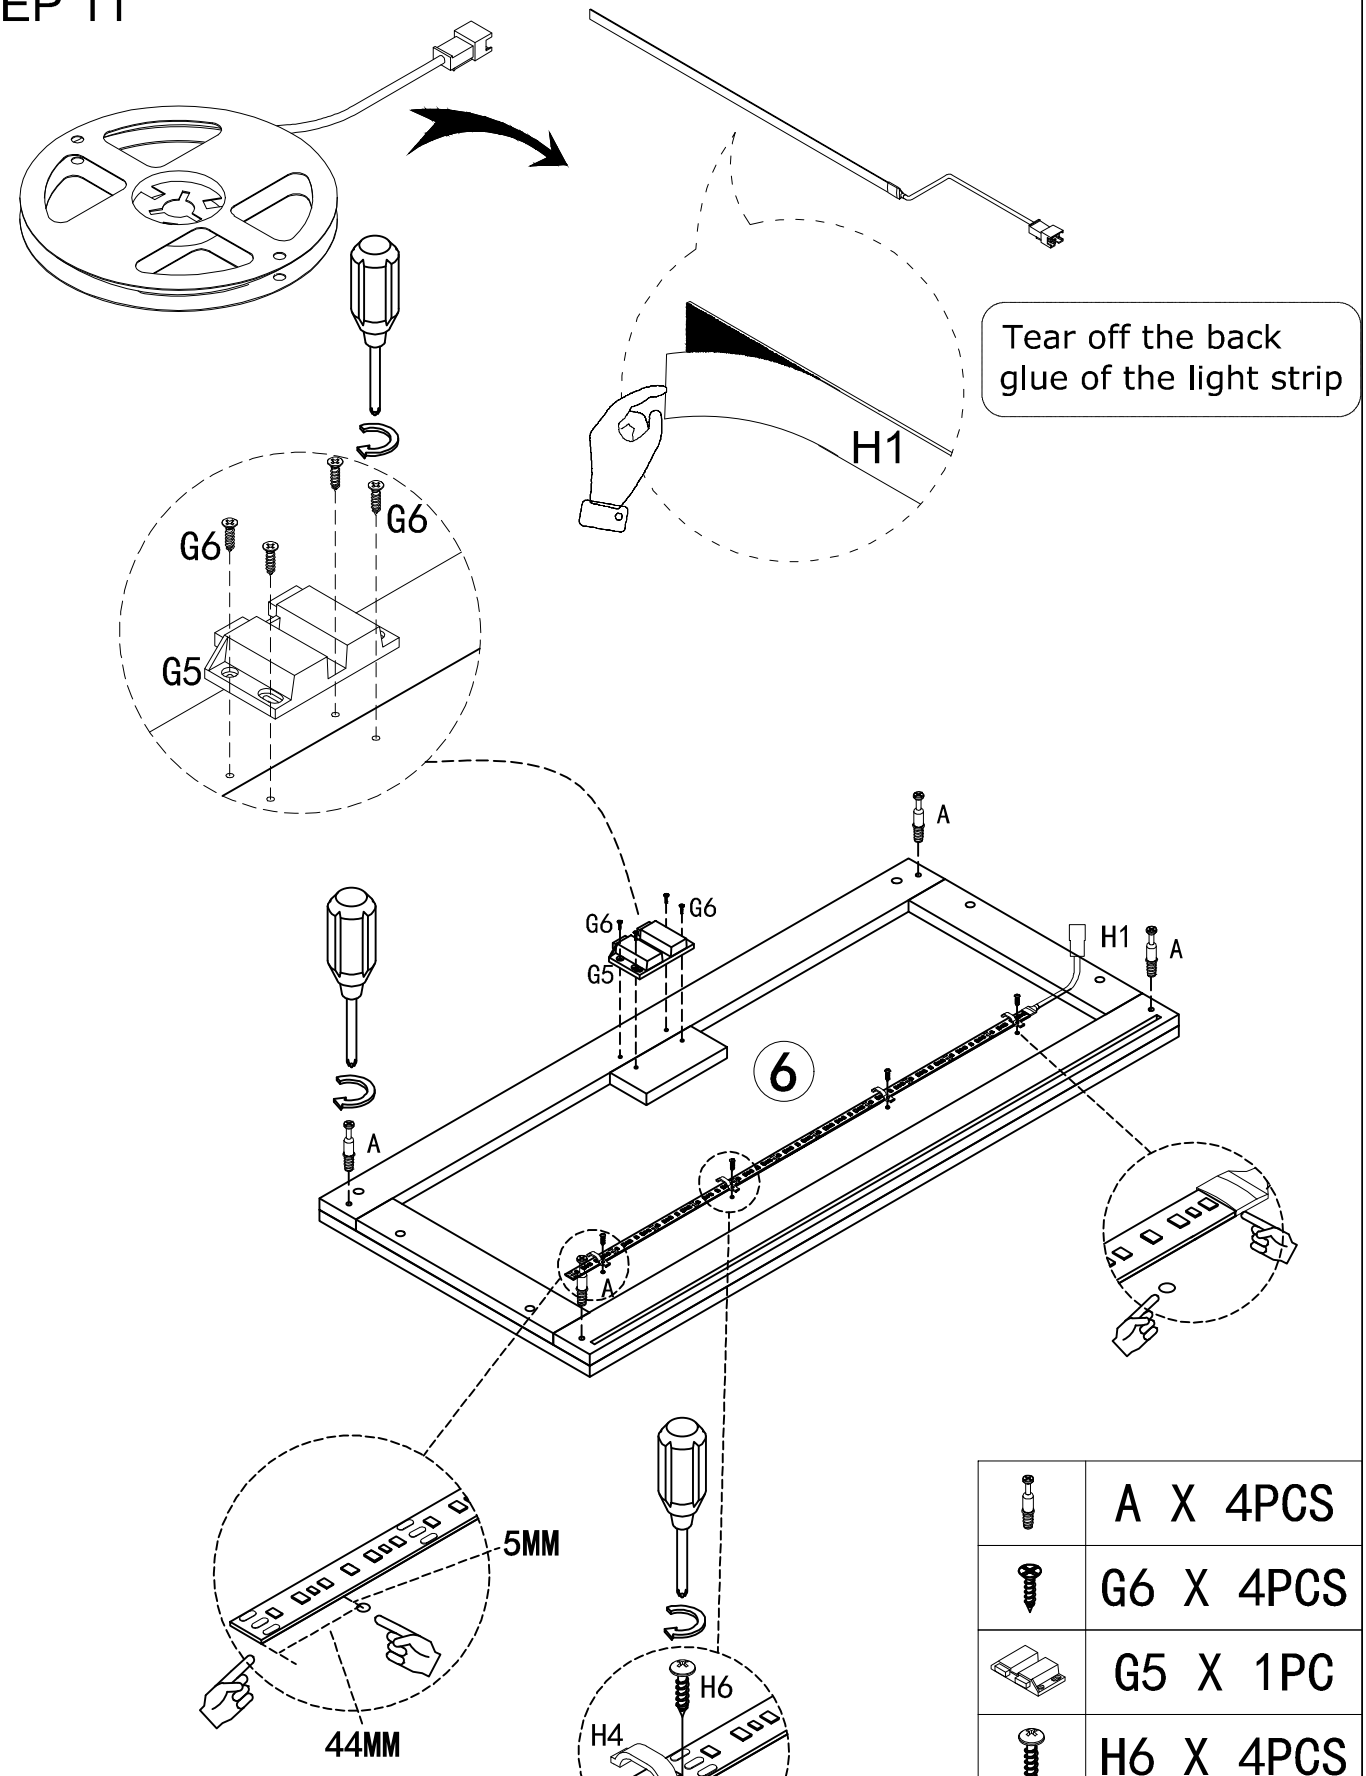


Install the light strip according to the suggested distance


| | |
|---|---|
| | A X 4PCS |
| | G6 X 4PCS |
| | G5 X 1PC |
| | H6 X 4PCS |
| | H4 X 4PCS |
| | H1 X 1PC |

STEP 12

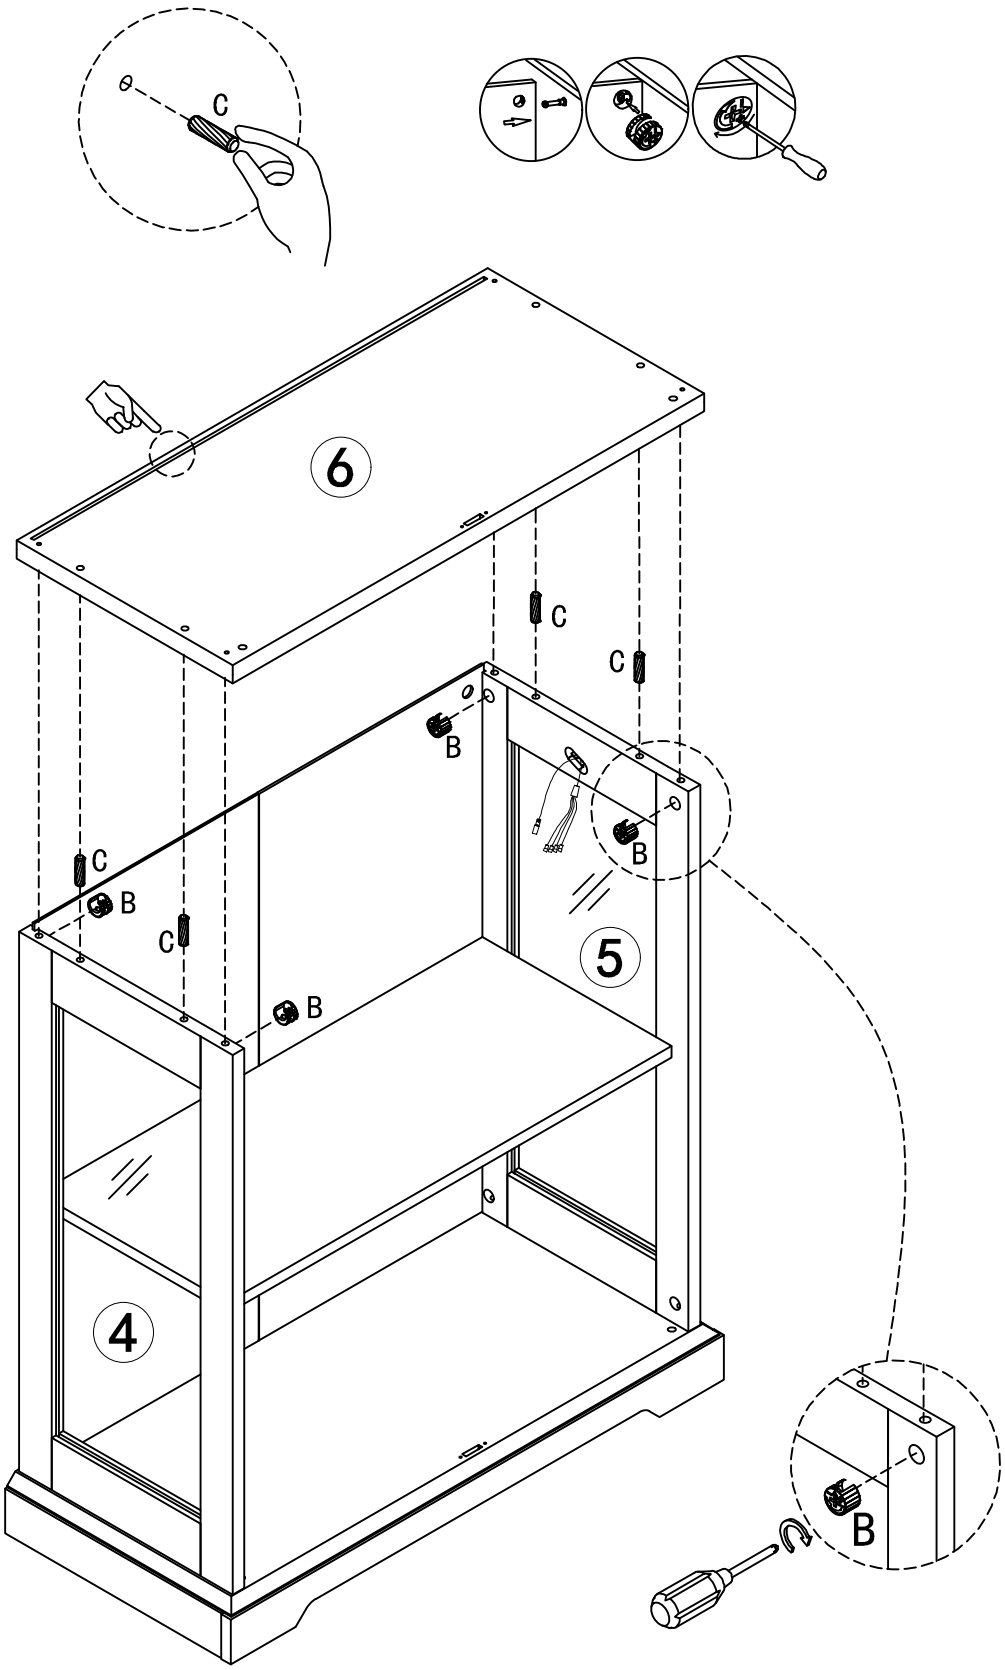



| | |
|---|---|
| | B X 4PCS |
| | C X 4PCS |

STEP 13

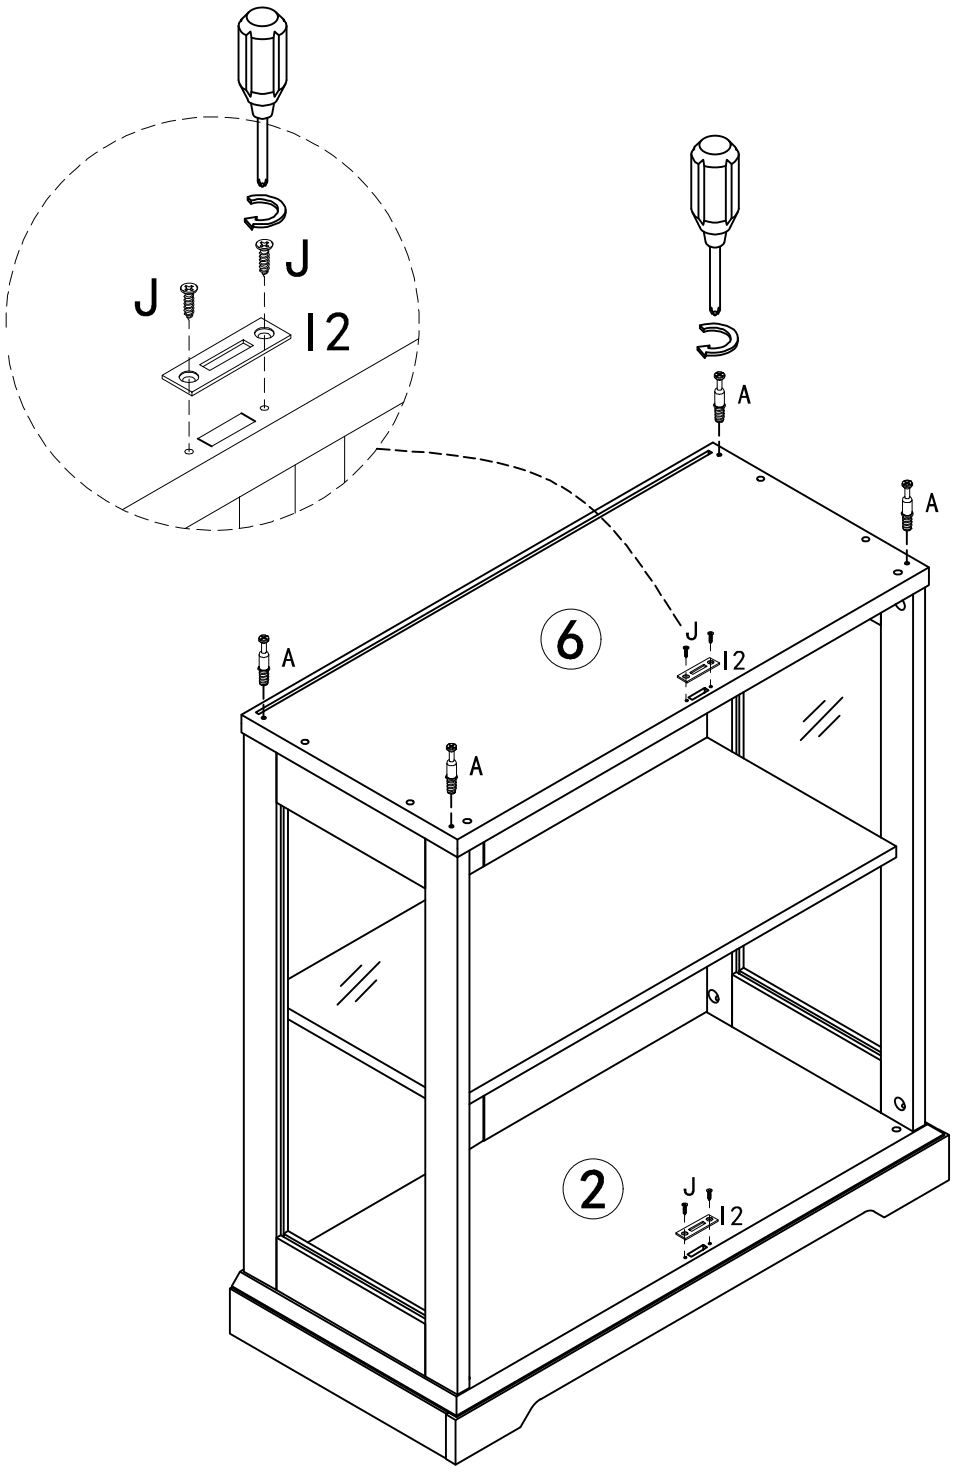


| | |
|---|---|
| | A X 4PCS |
| | I2 X 2PCS |
| | J X 4PCS |


STEP 14

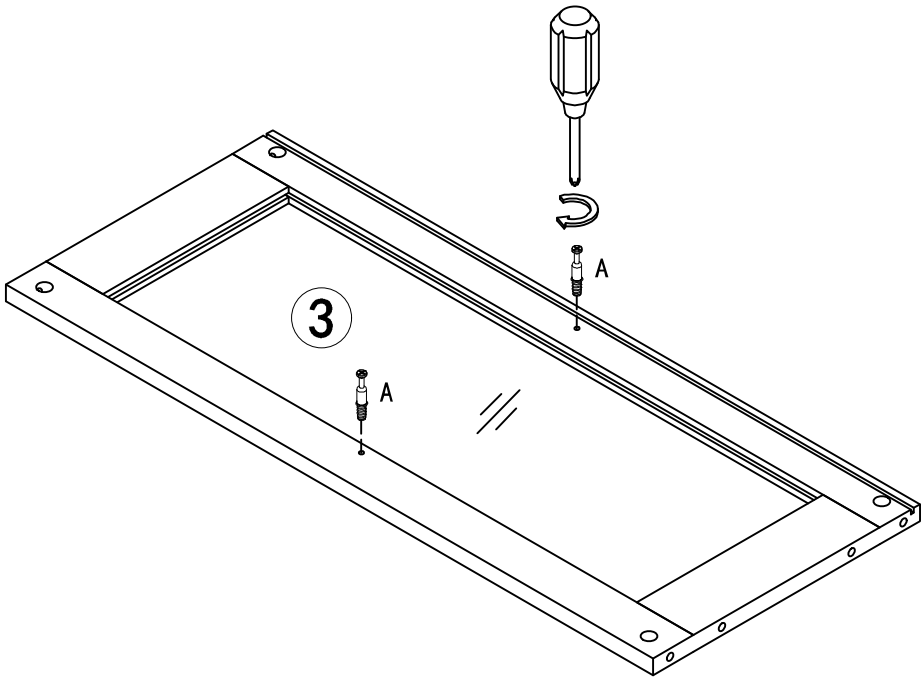


×2


| | |
|---|---|
| | A X 4PCS |

STEP 15

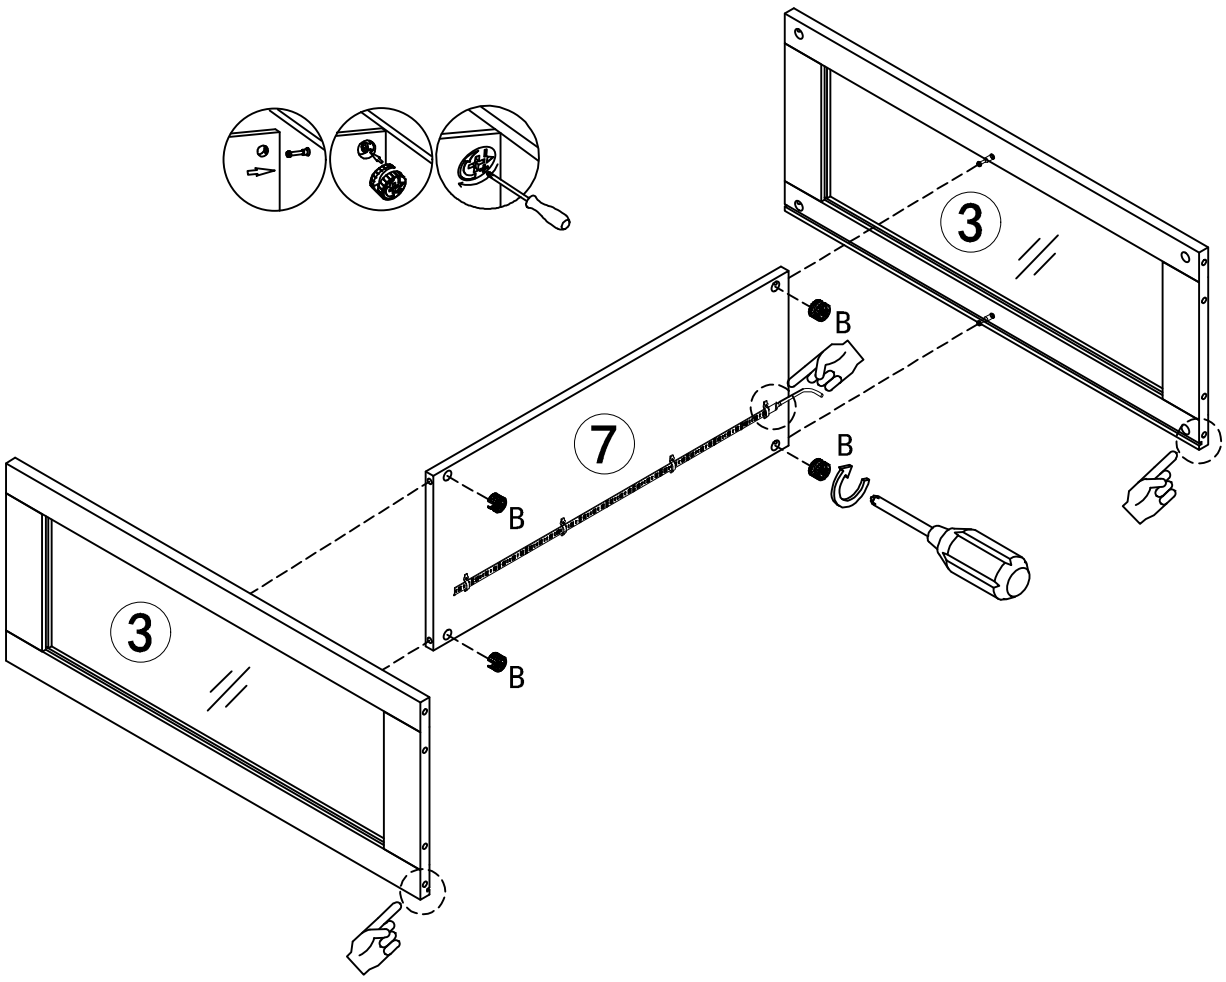



| | |
|---|---|
| | B X 4PCS |


STEP 16

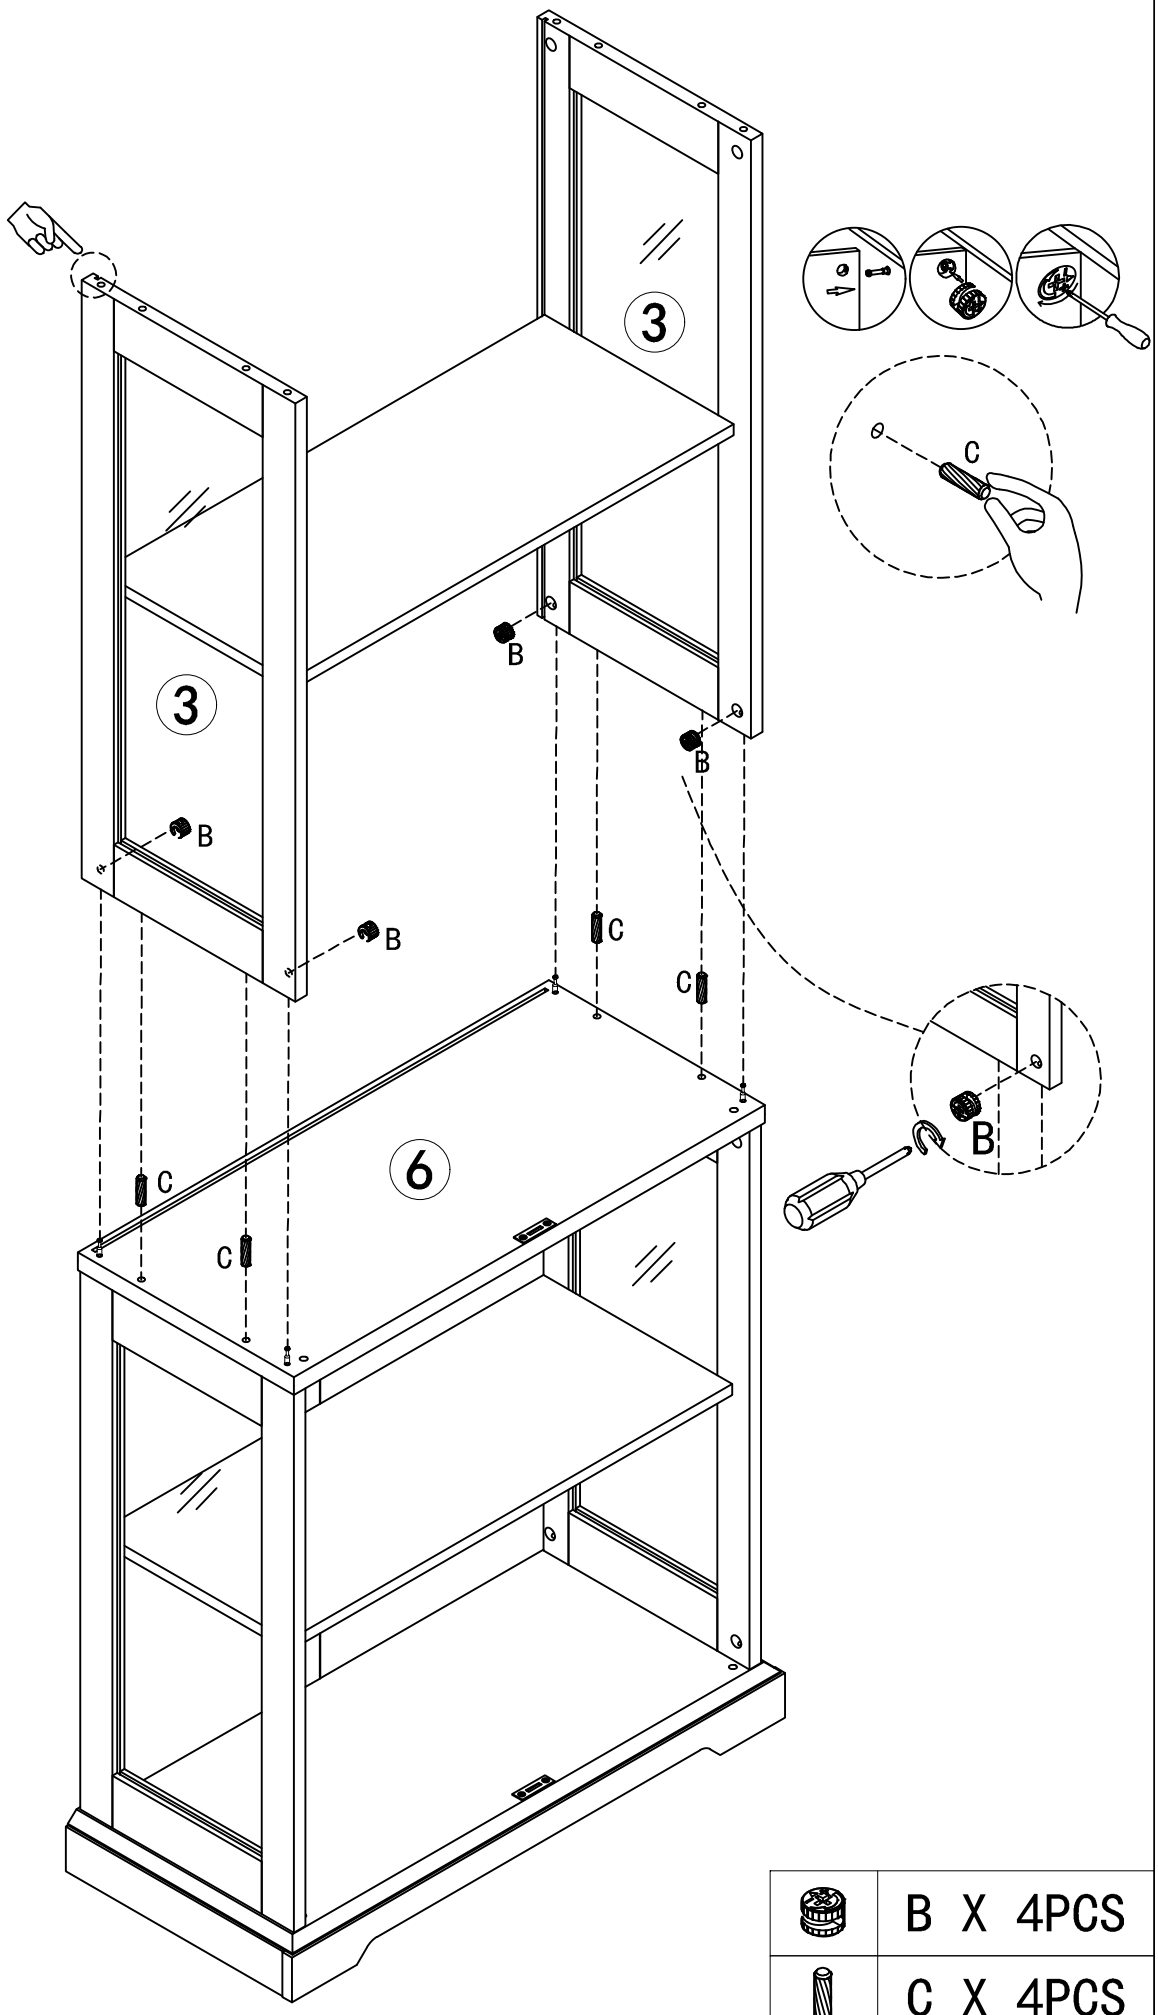



| | |
|---|---|
| | B X 4PCS |
| | C X 4PCS |

STEP 17

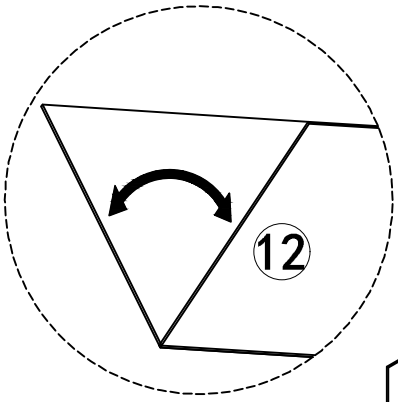


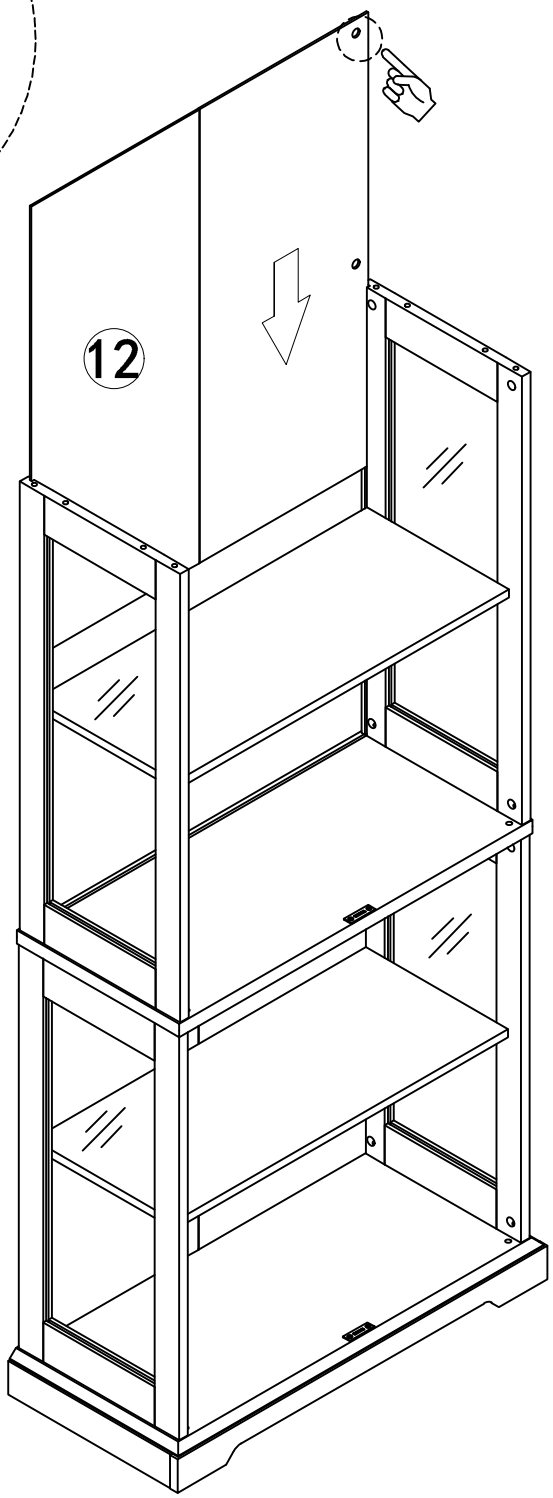



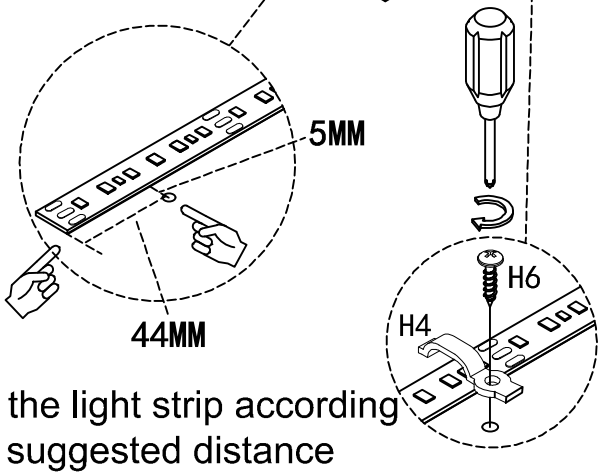
# STEP 18

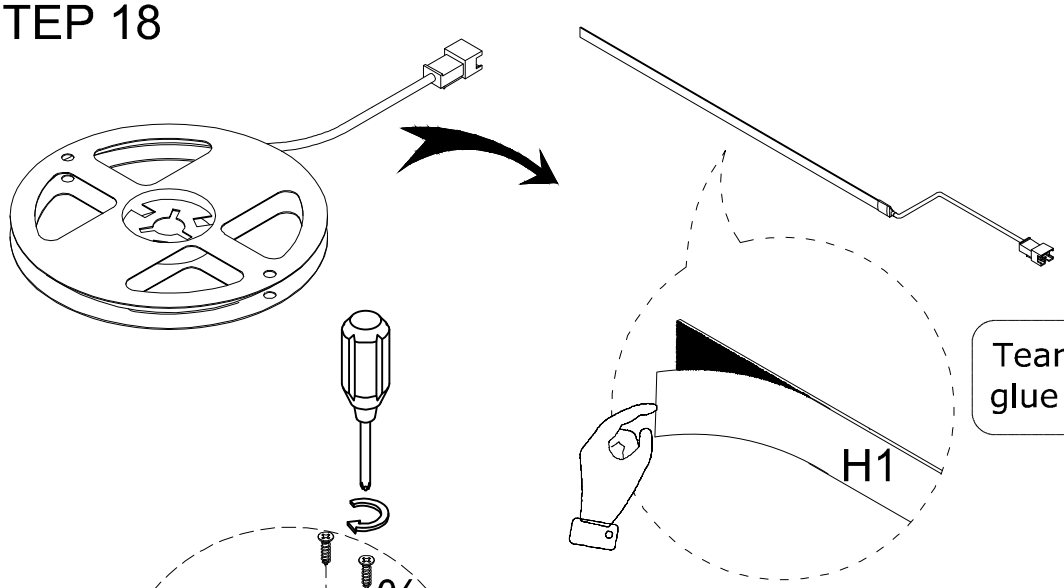


Tear off the back glue of the light strip

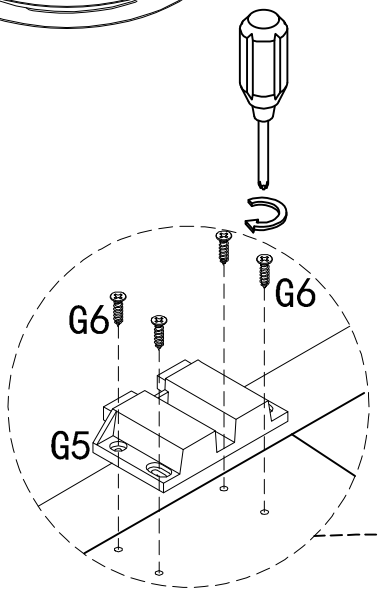

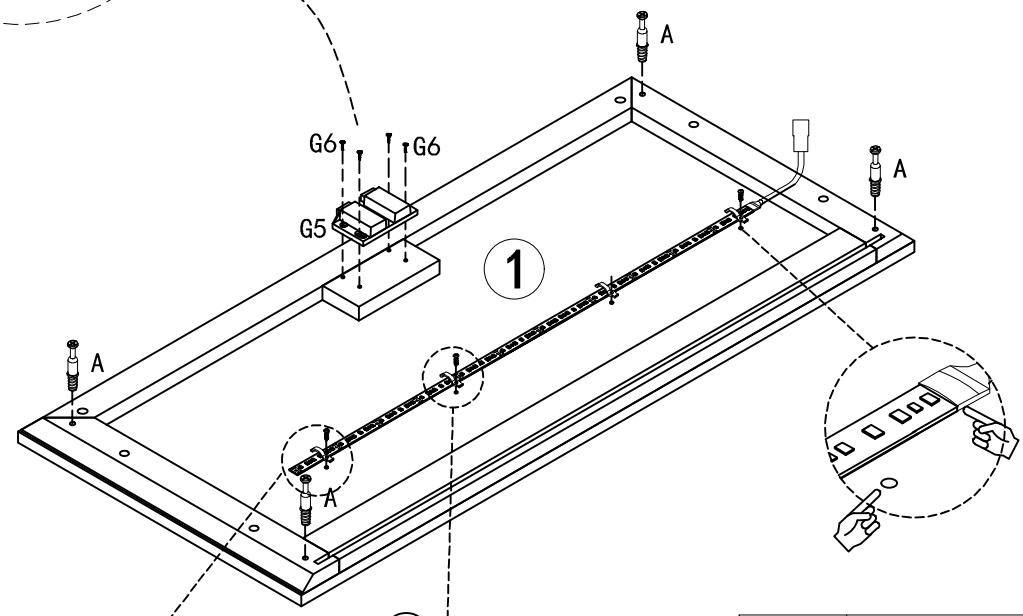







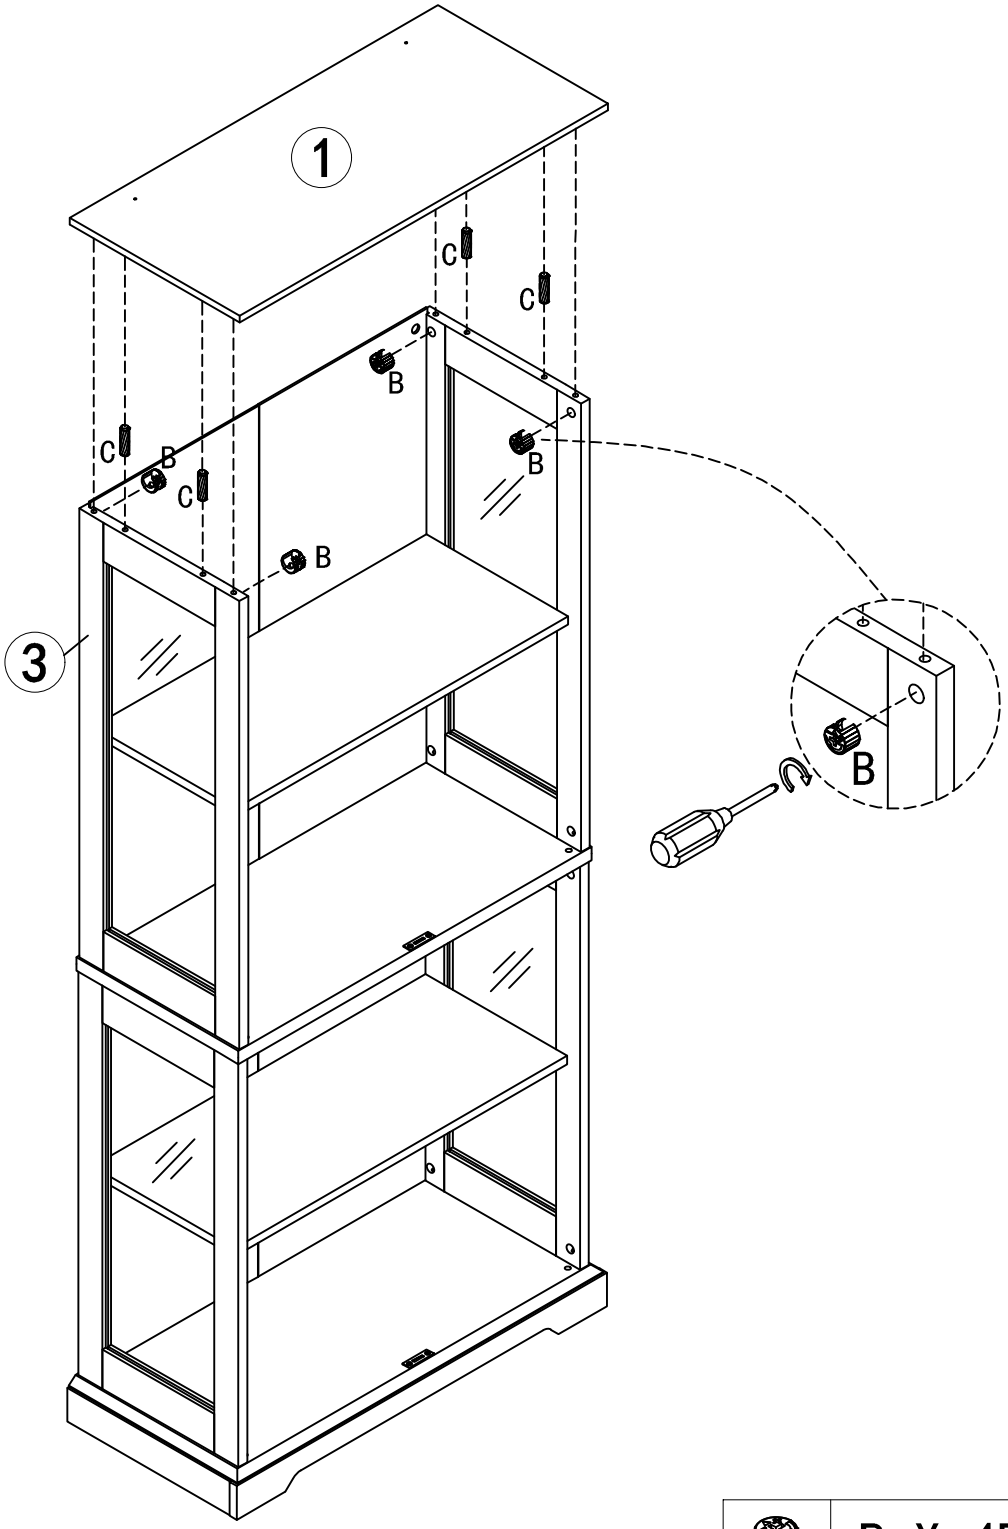

Install the light strip according to the suggested distance

| | |
|---|---|
| | A X 4PCS |
| | G6 X 4PCS |
| | G5 X 1PC |
| | H6 X 4PCS |
| | H4 X 4PCS |
| | H1 X 1PC |

STEP 19








| | |
|---|---|
| | B X 4PCS |
| | C X 4PCS |

# STEP 20

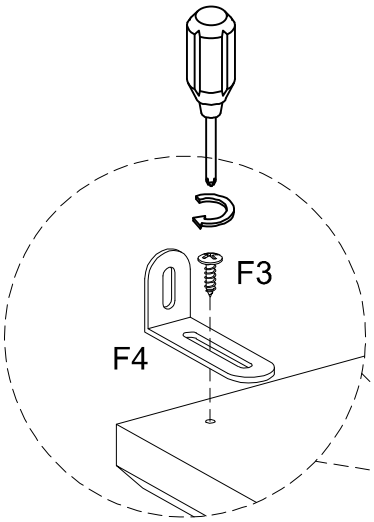



Note: Put the anti-tip device F4 on the top, near theback side, and fix it with a screw F3.

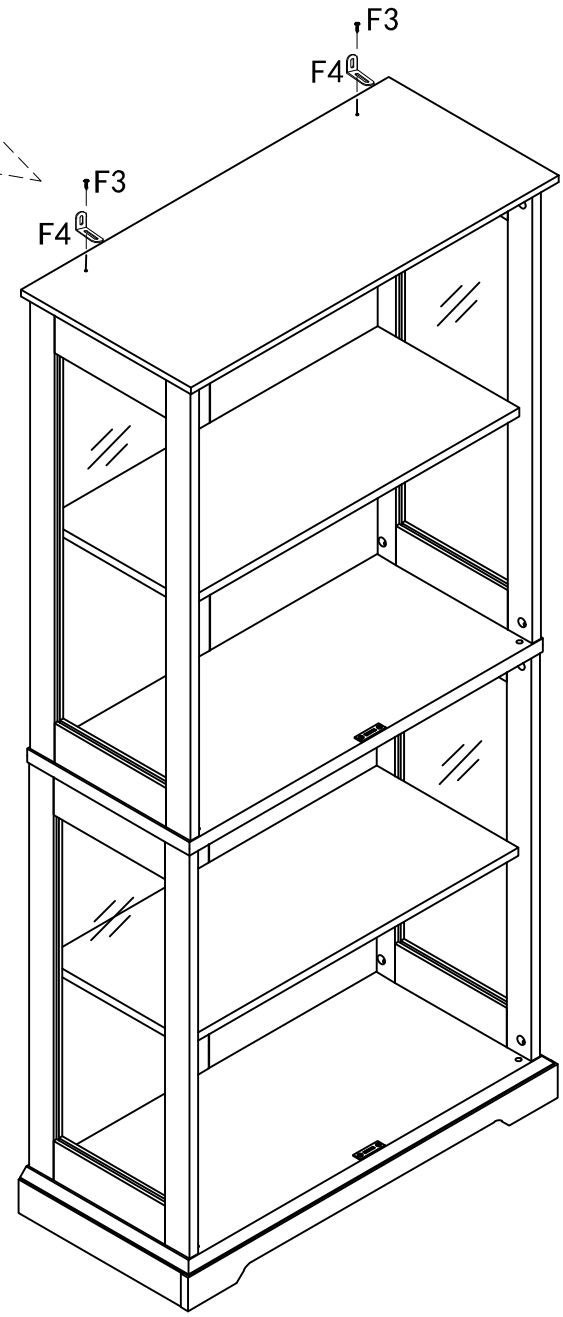


| | |
|---|---|
|  | F3 X 2PCS |
|  | F4 X 2PCS |


STEP 21

NOTE:To prevent the cabinet from wobbling
please be sure to install the back panel fasteners.

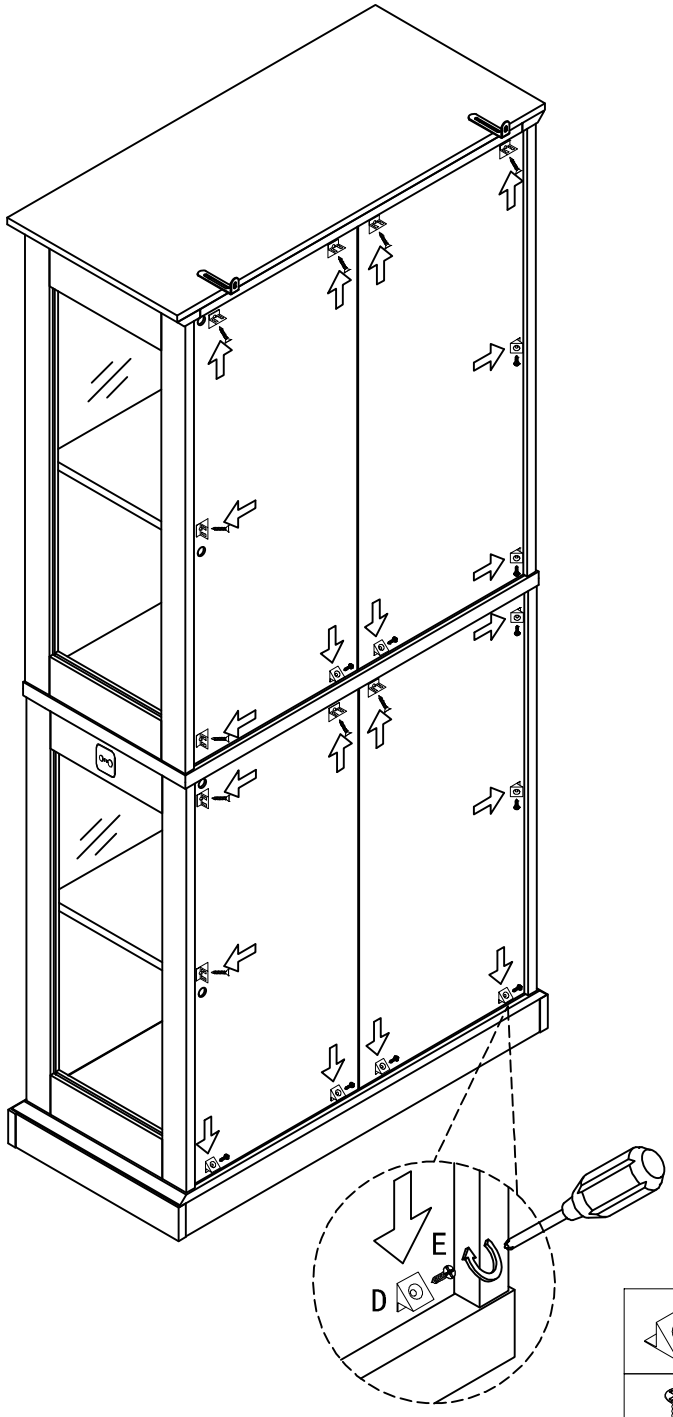




| | |
|---|---|
| | D X 20PCS |
| | E X 20PCS |


STEP 22

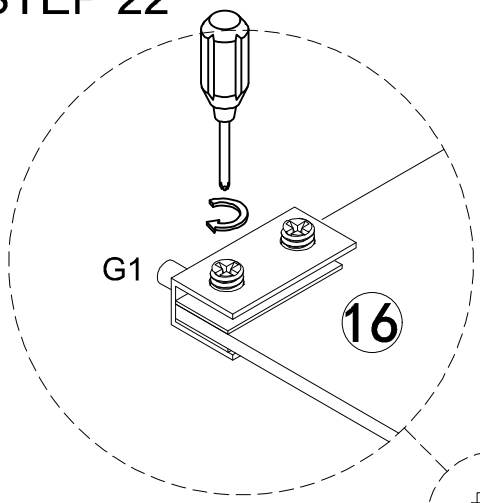




A rubber gasket should be placed on both sides of the glass

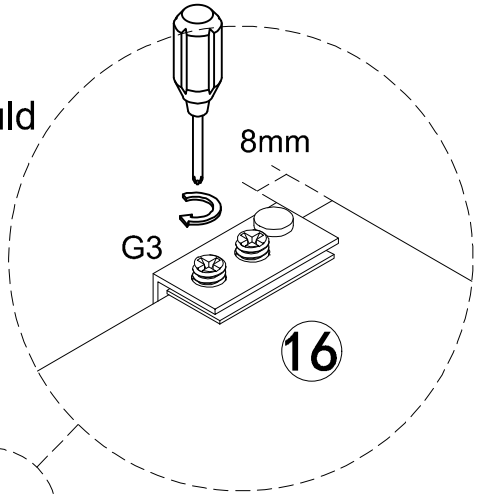

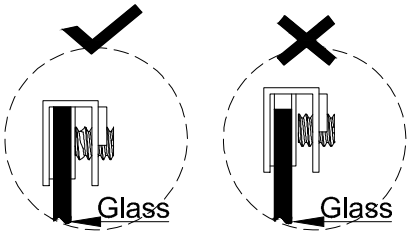


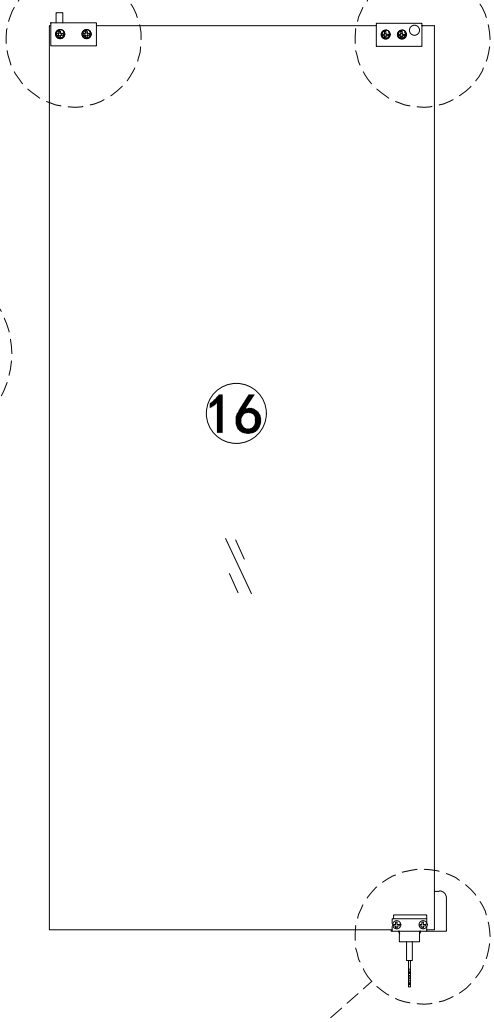

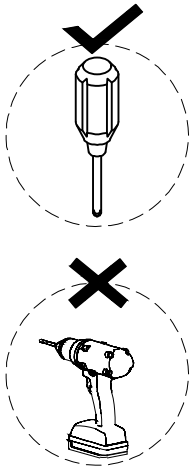
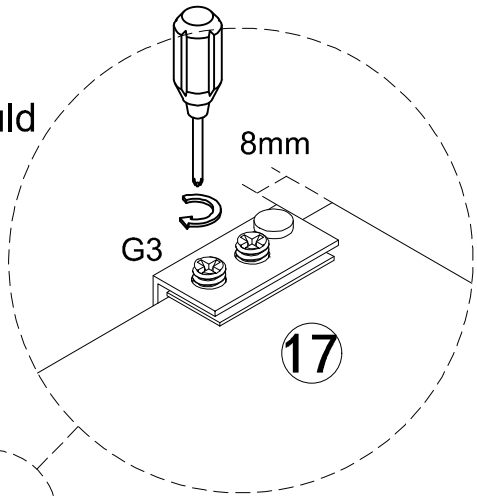

A rubber gasket should be placed on both sides of the glass

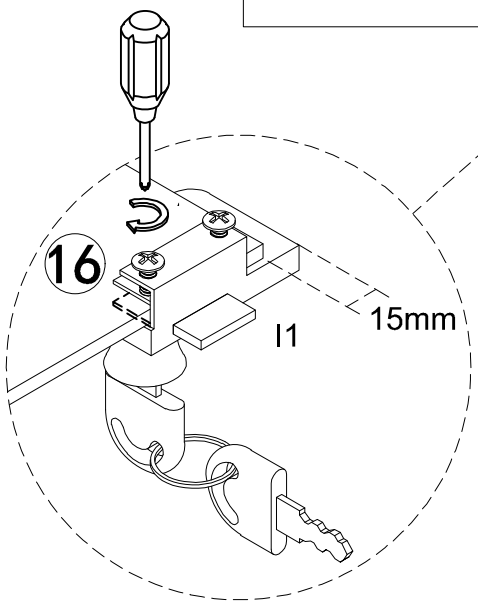
| | |
|---|---|
|  | G1 X 1SET |
|  | G3 X 1SET |
|  | I1 X 1SET |


STEP 23

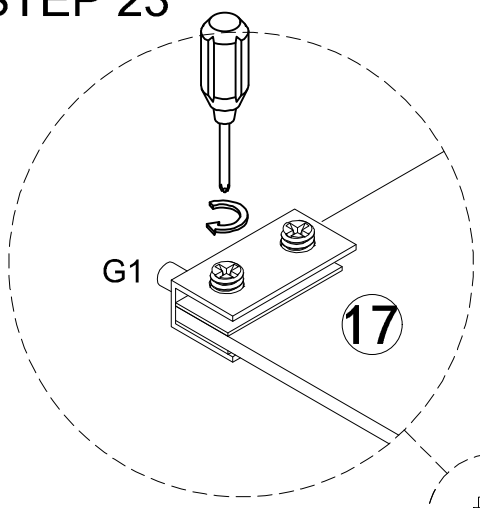




A rubber gasket should be placed on both sides of the glass



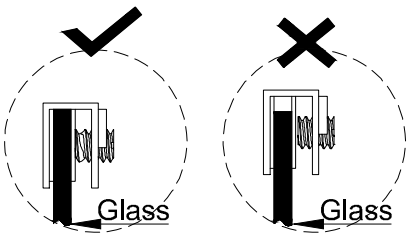


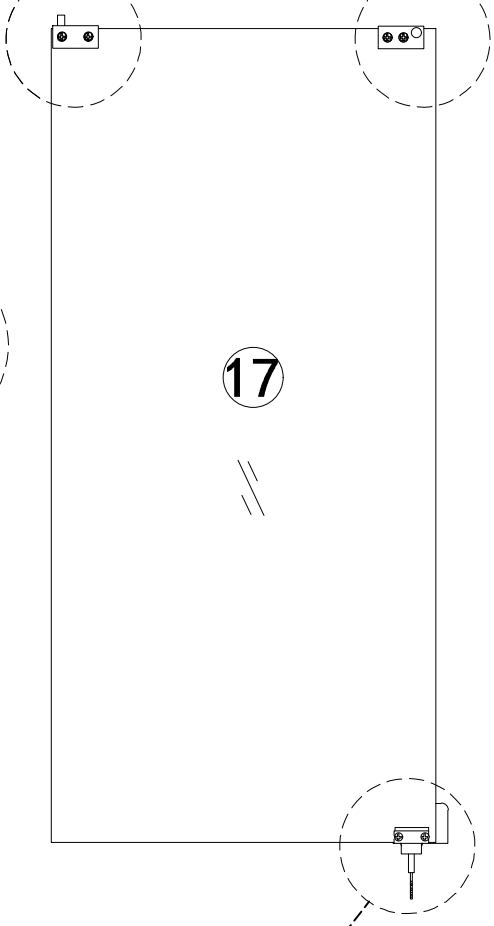

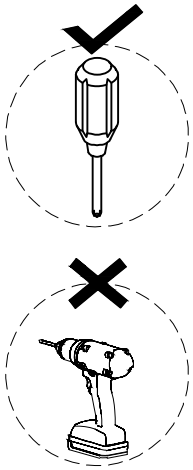

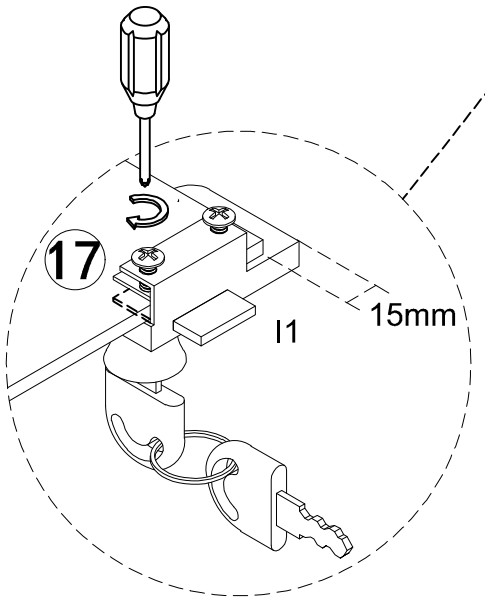A rubber gasket should be placed on both sides of the glass

| | |
|---|---|
|  | G1 X 1SET |
|  | G3 X 1SET |
|  | I1 X 1SET |

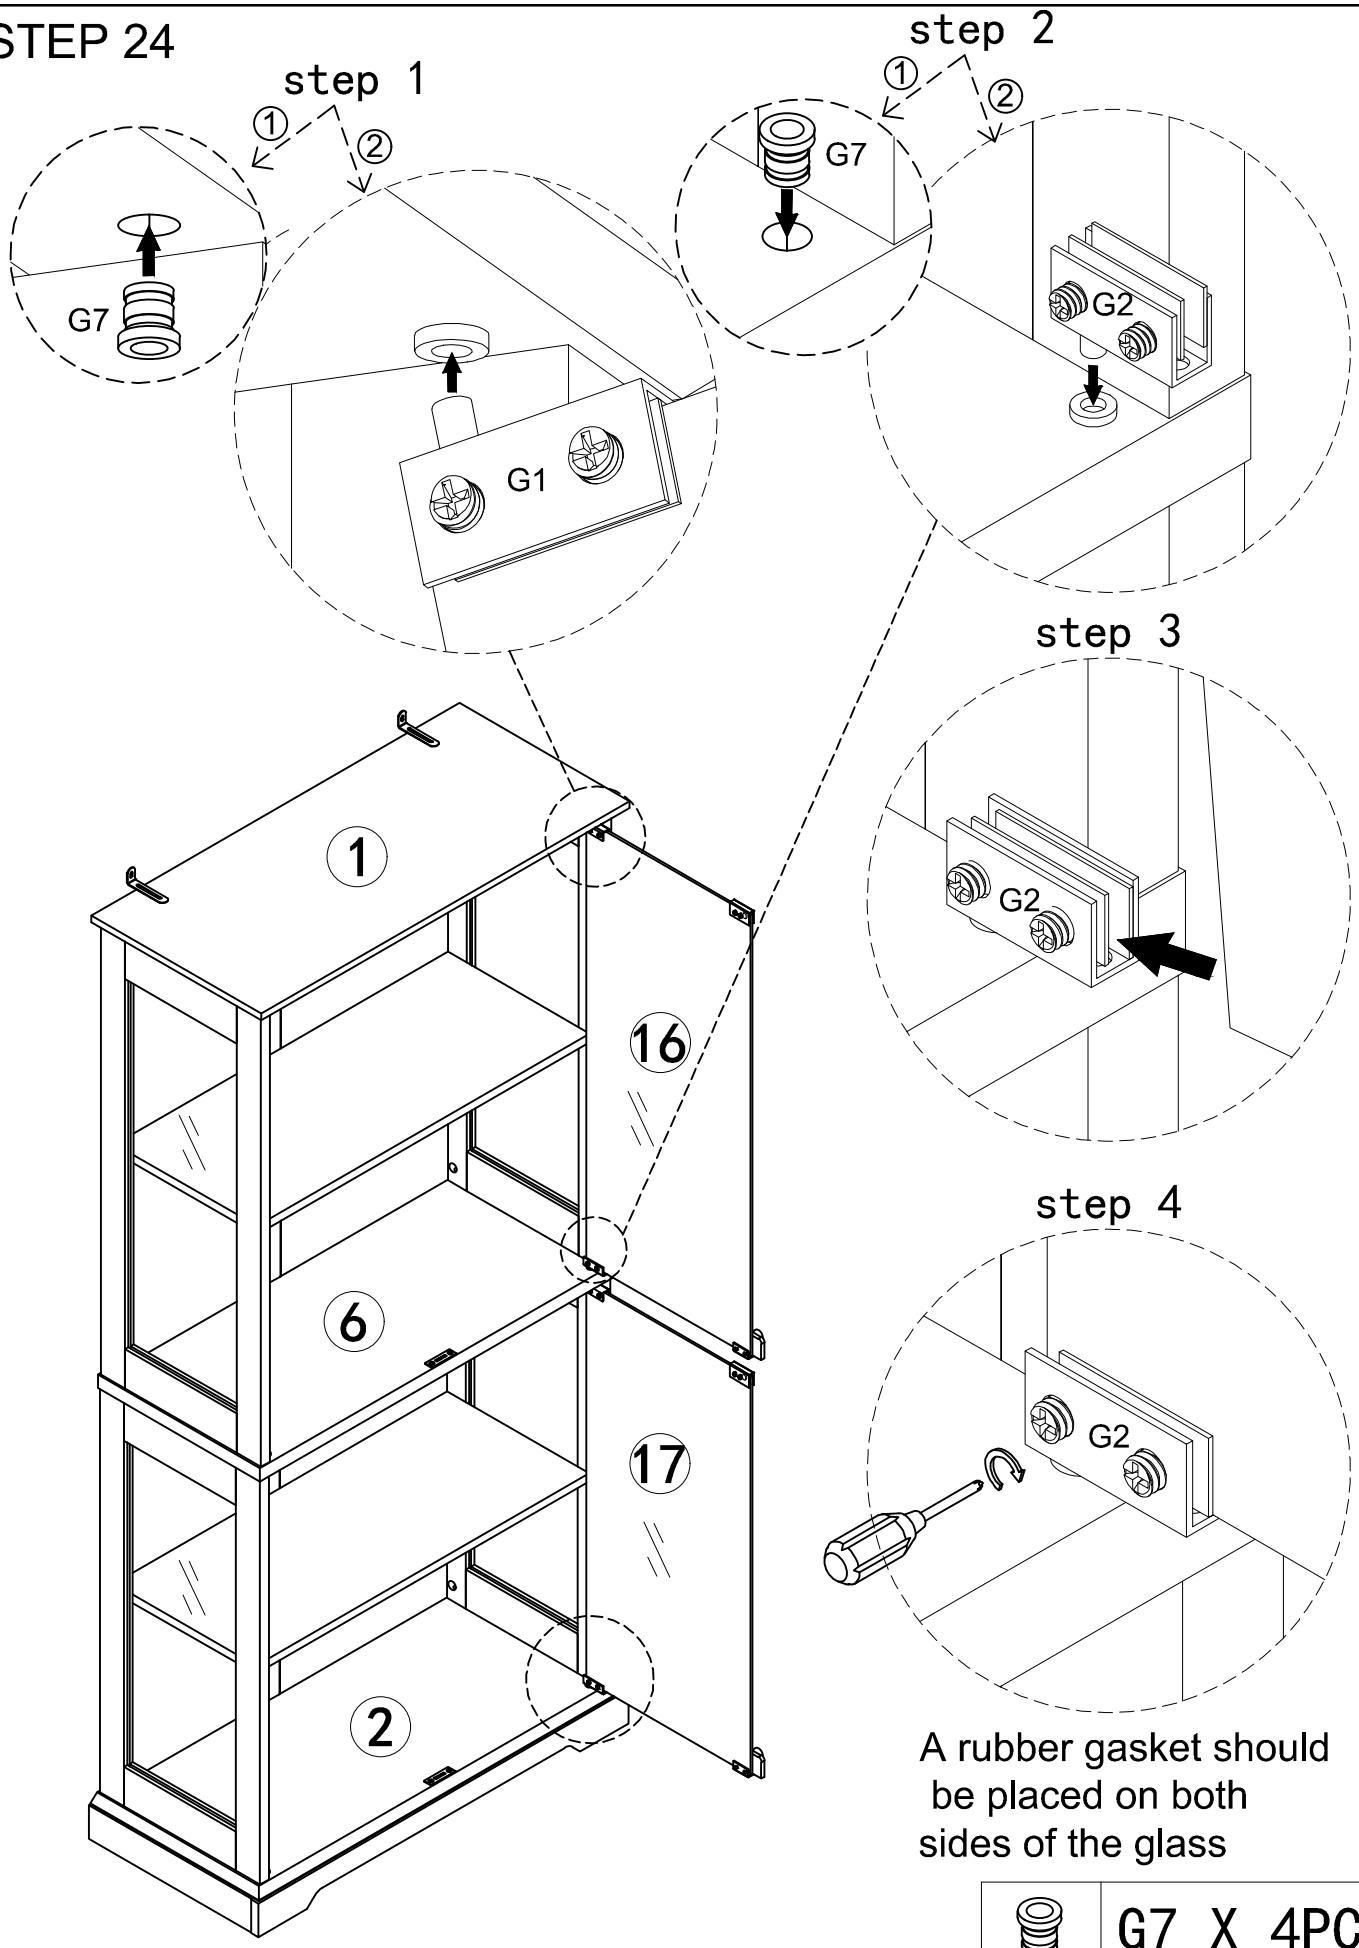
STEP 24




A rubber gasket should be placed on both sides of the glass


| | |
|---|---|
| | G7 X 4PCS |
| | G2 X 2SET |



# STEP 25

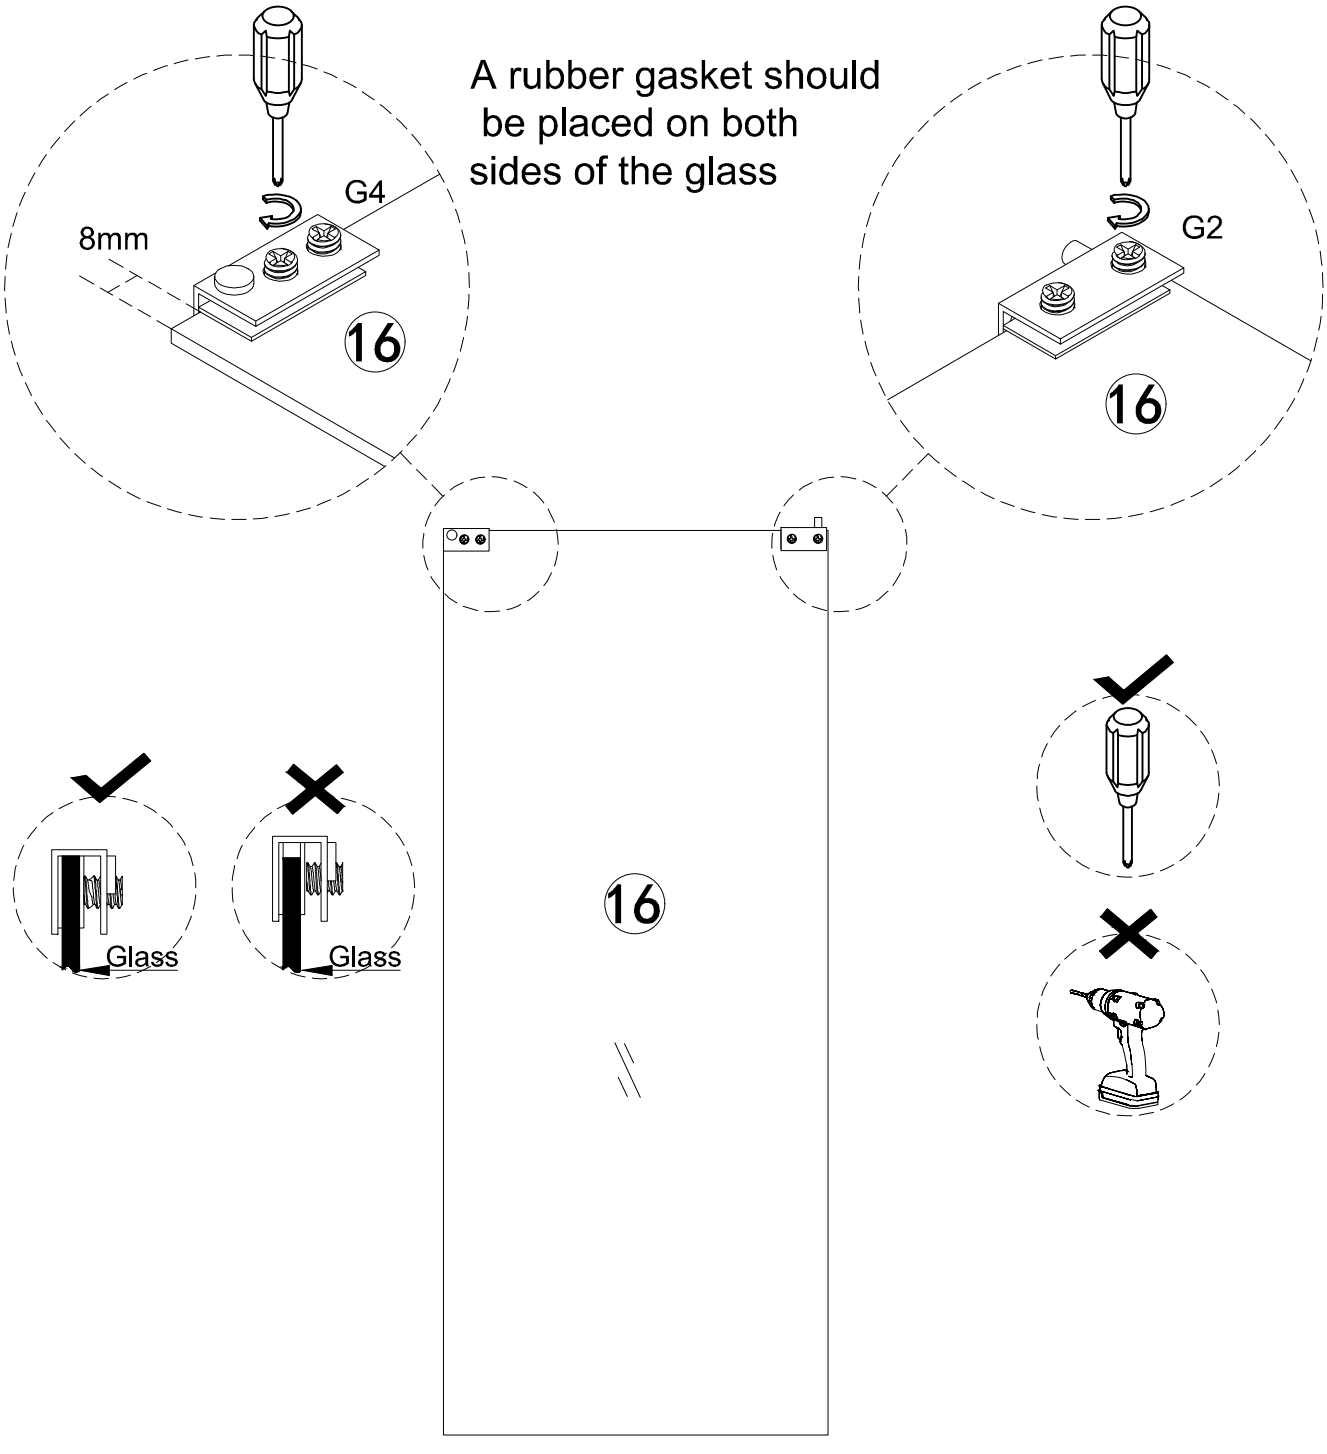



| | |
|---|---|
| | G2 X 1SET |
| | G4 X 1SET |

# STEP 26

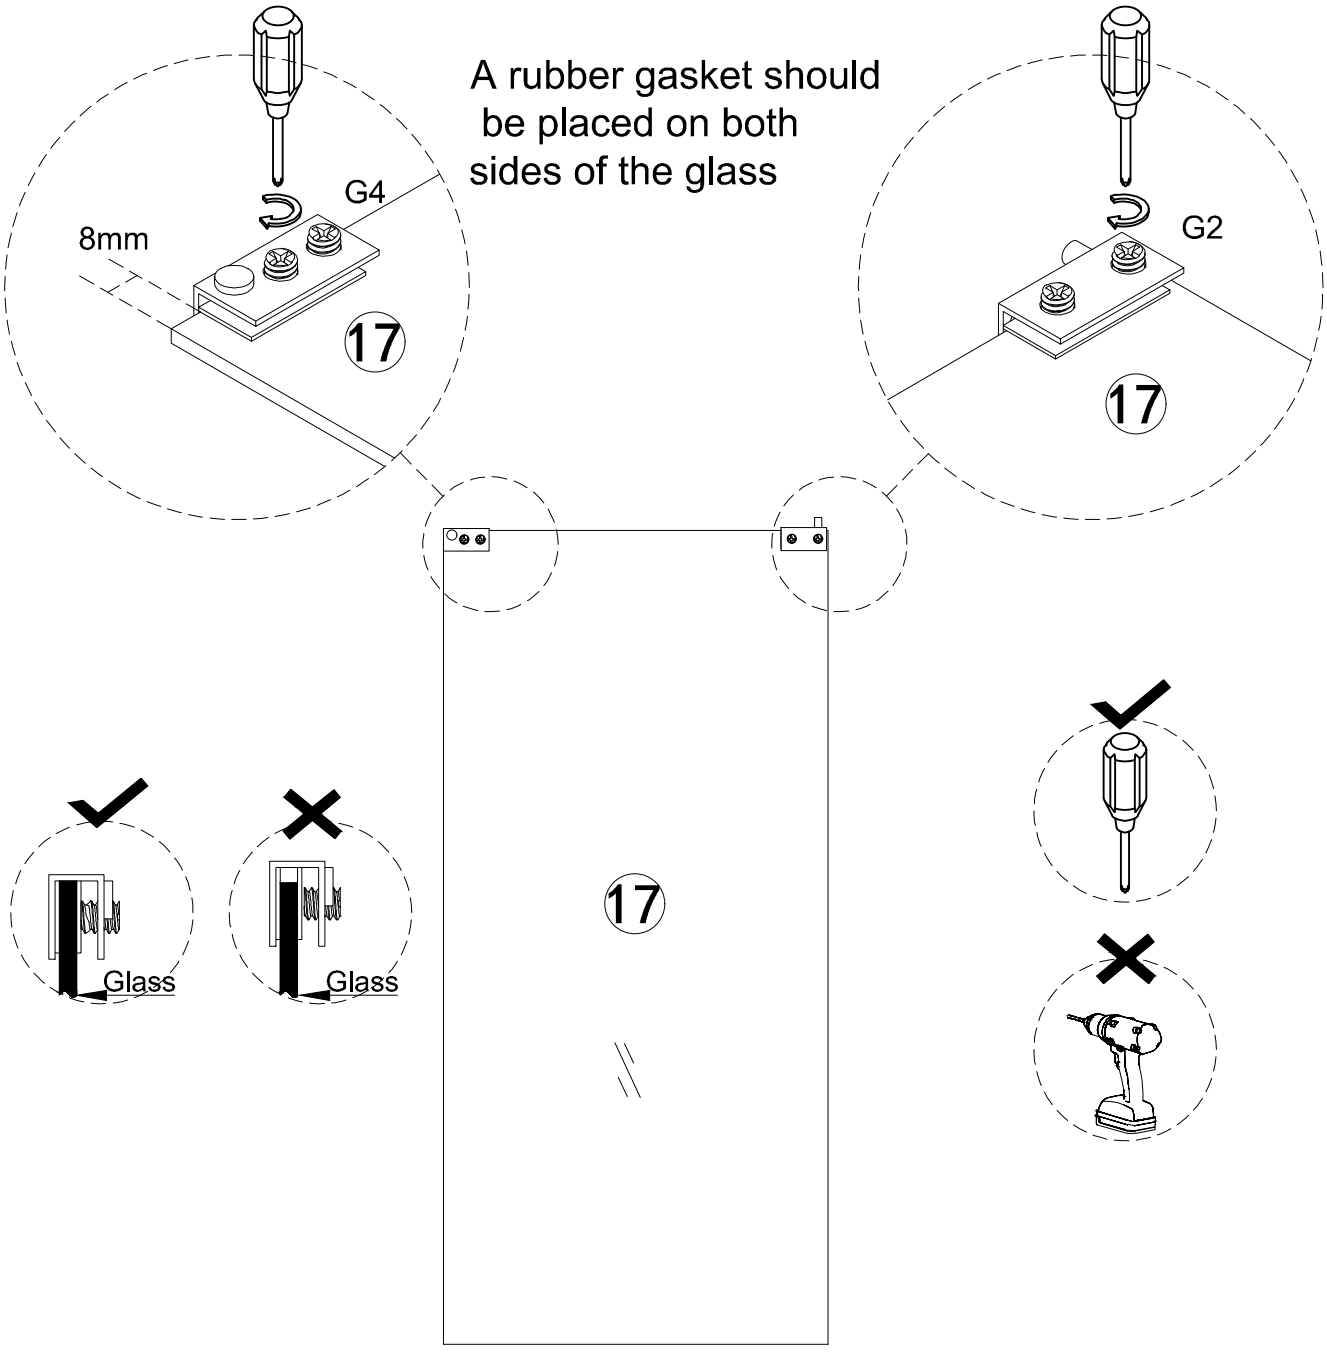


| | |
|---|---|
|  | G2 X 1SET |
|  | G4 X 1SET |


STEP 27

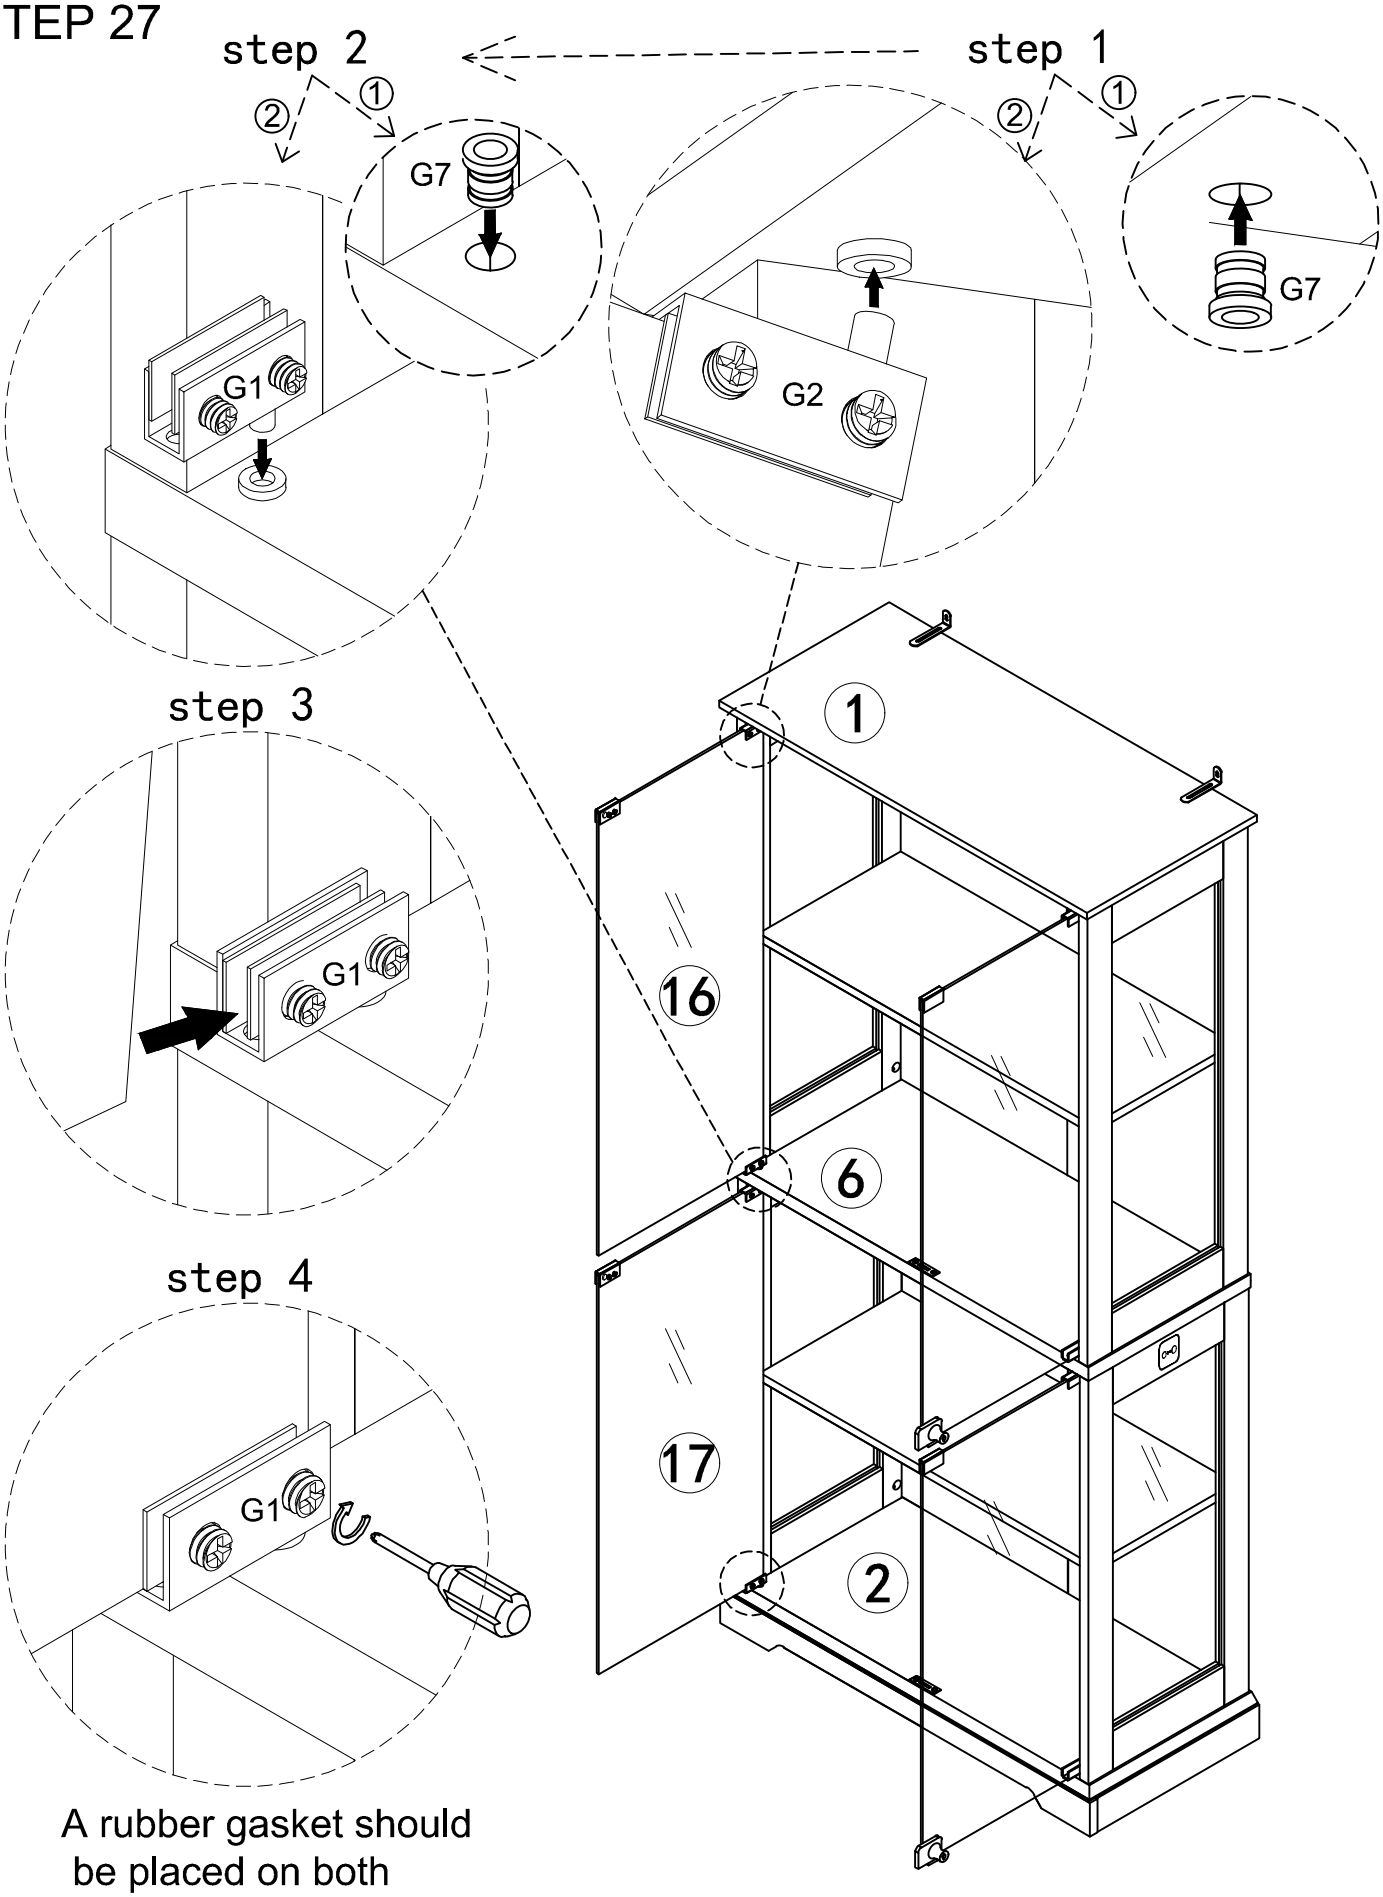


A rubber gasket should be placed on both sides of the glass


| | | | |
|---|---|---|---|
| | G7 X 4PCS | | G1 X 2SET |

STEP 28

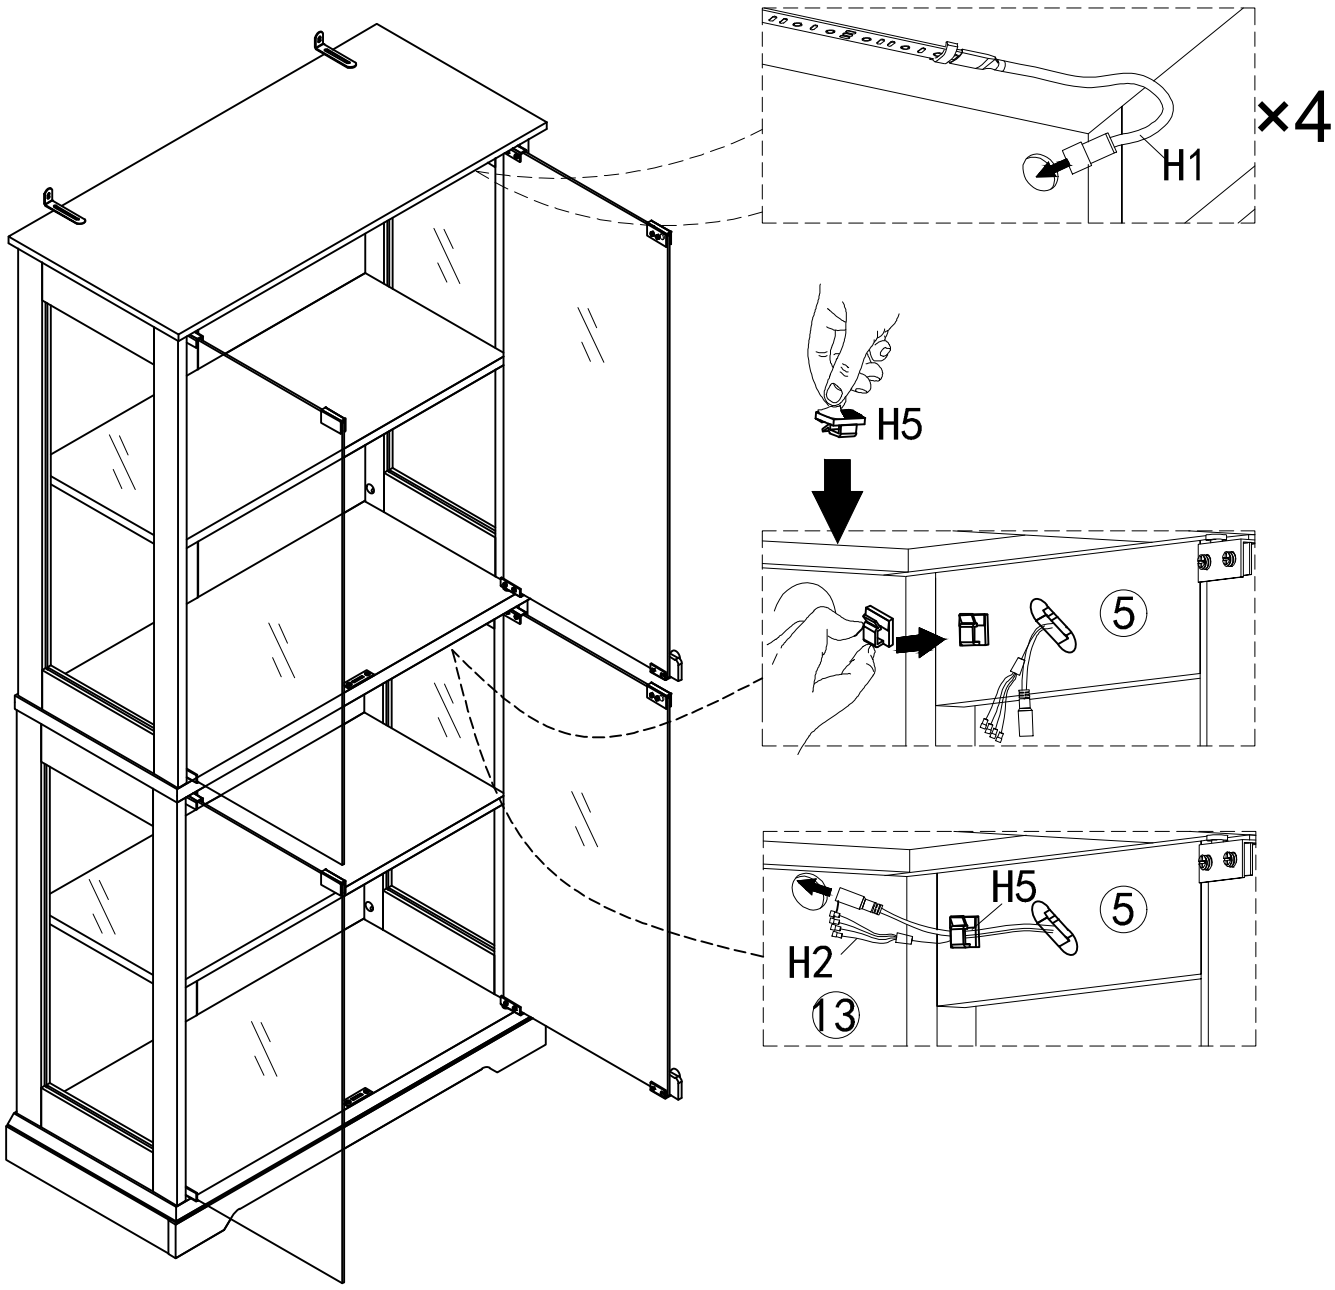



| | |
|---|---|
| | H5 X 1PC |


STEP 29

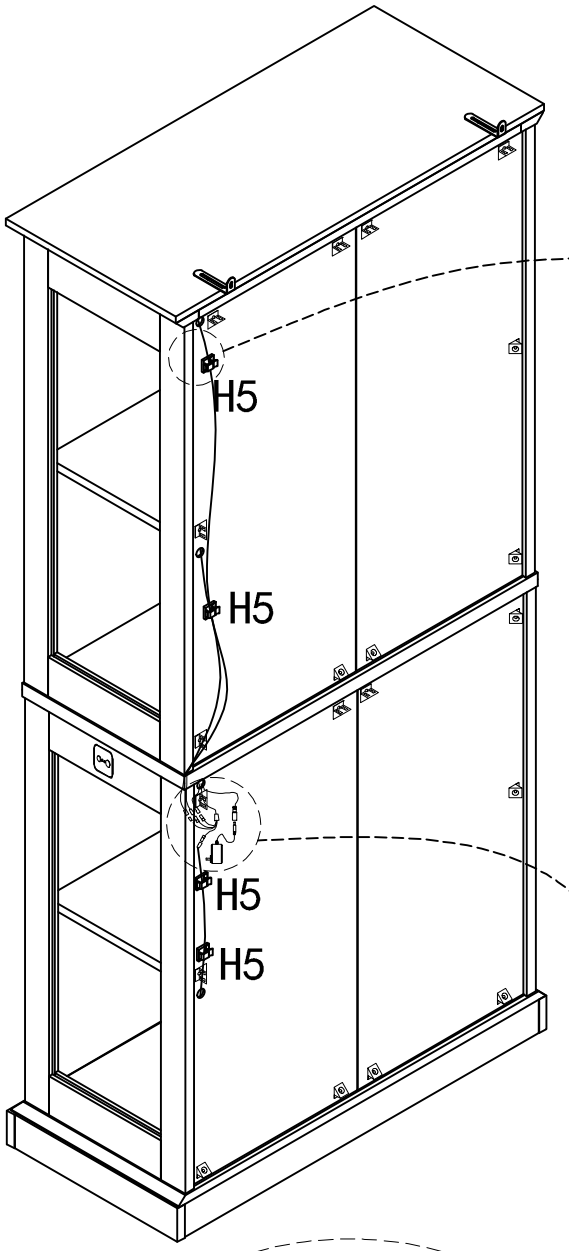




step 1

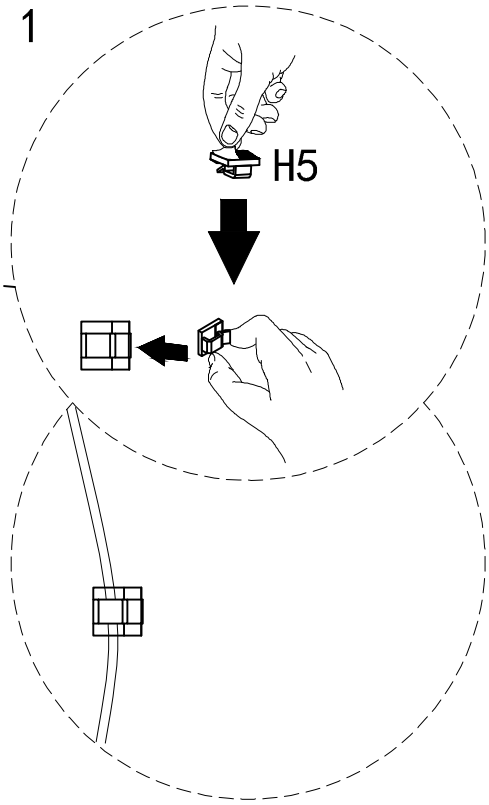



step 2

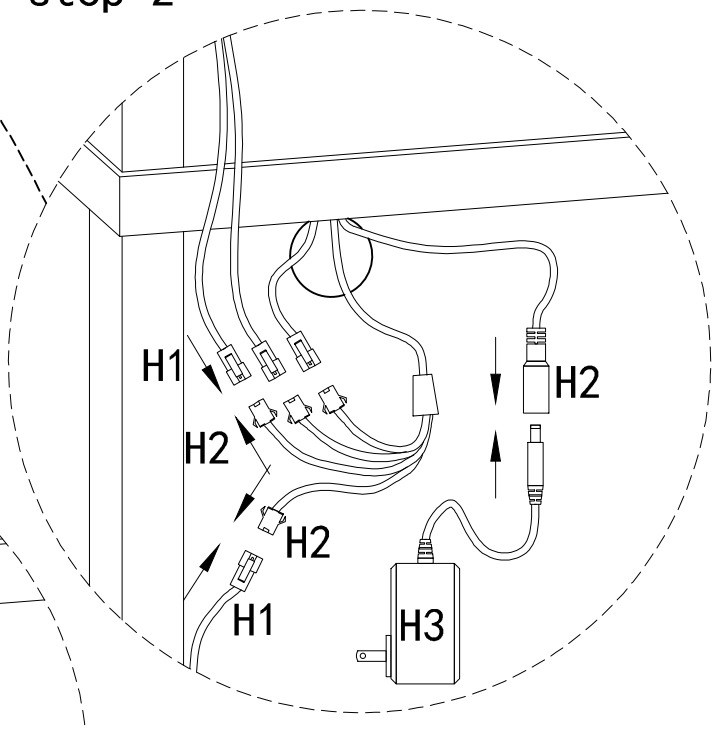
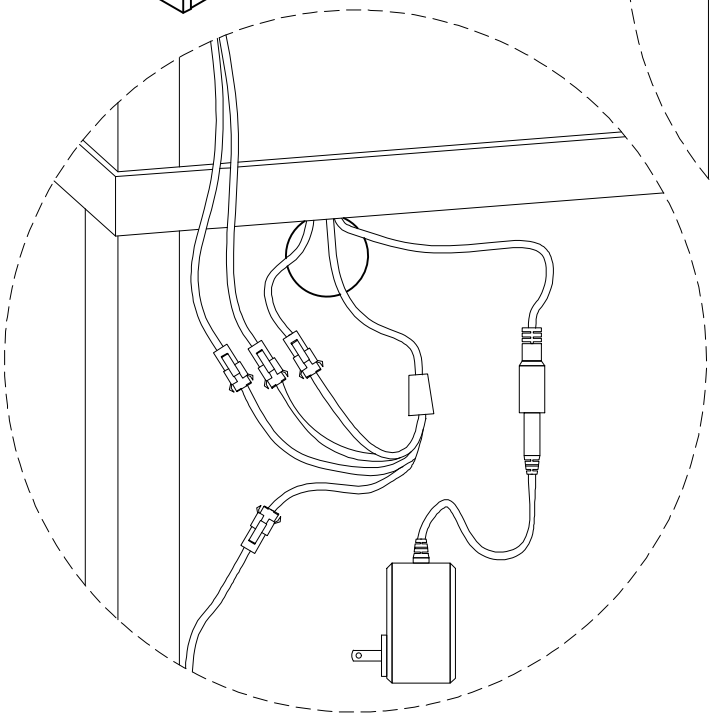
| | |
|---|---|
|  | H3 X 1PC |
|  | H5 X 4PCS |


# STEP 30

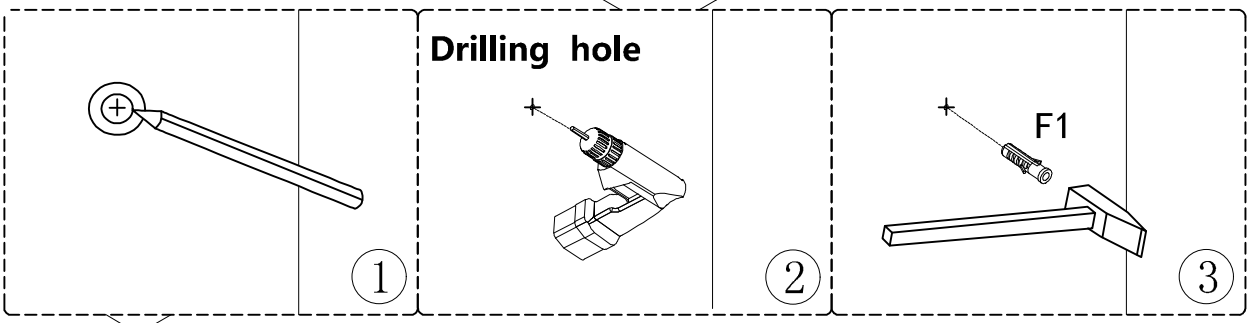


## WALL


Drill a hole in the wall, then hammer the F1 into the wall with a hammer


Note: Follow step
Link F4 and F1 with a F2 using a screwdriver,and assembly it tightly.

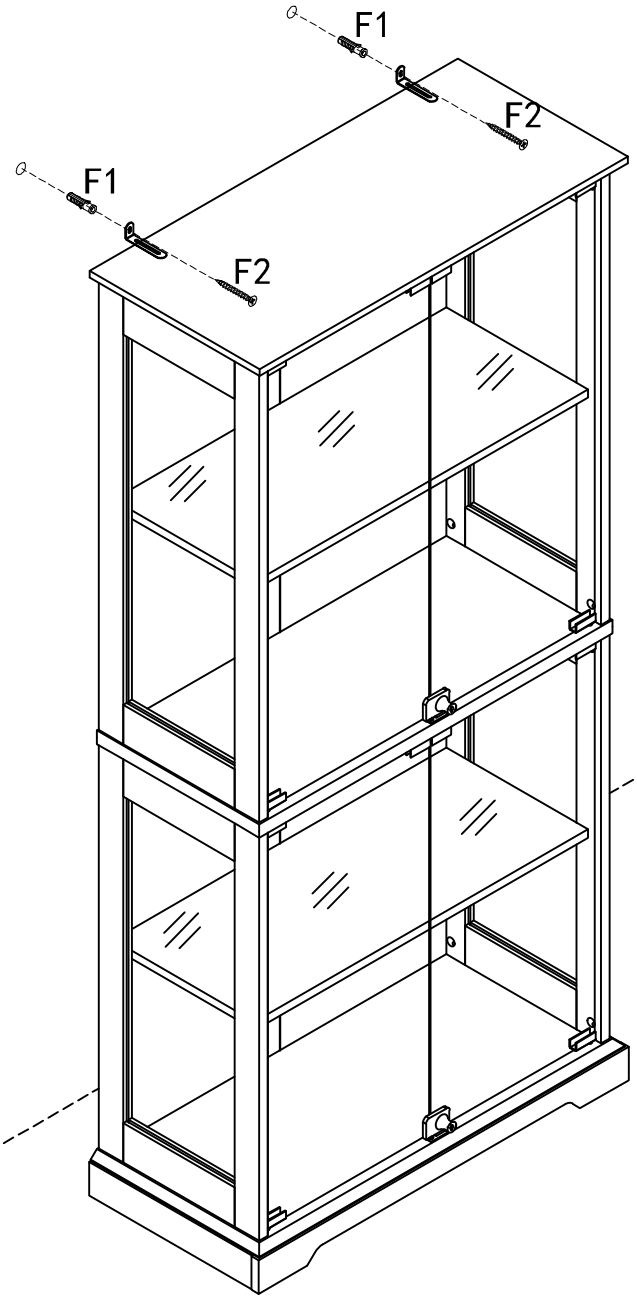


| | |
|---|---|
|  | F1 X 2PCS |
|  | F2 X 2PCS |

STEP 31

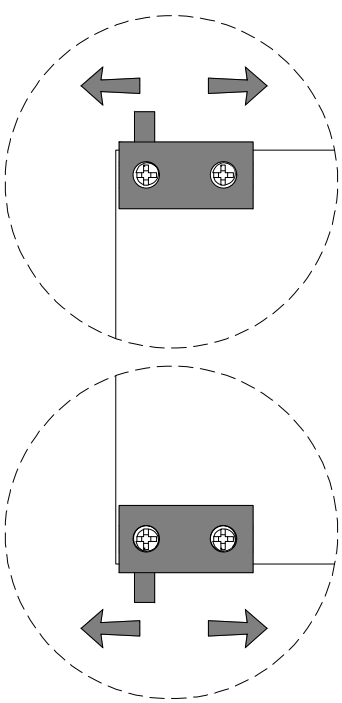

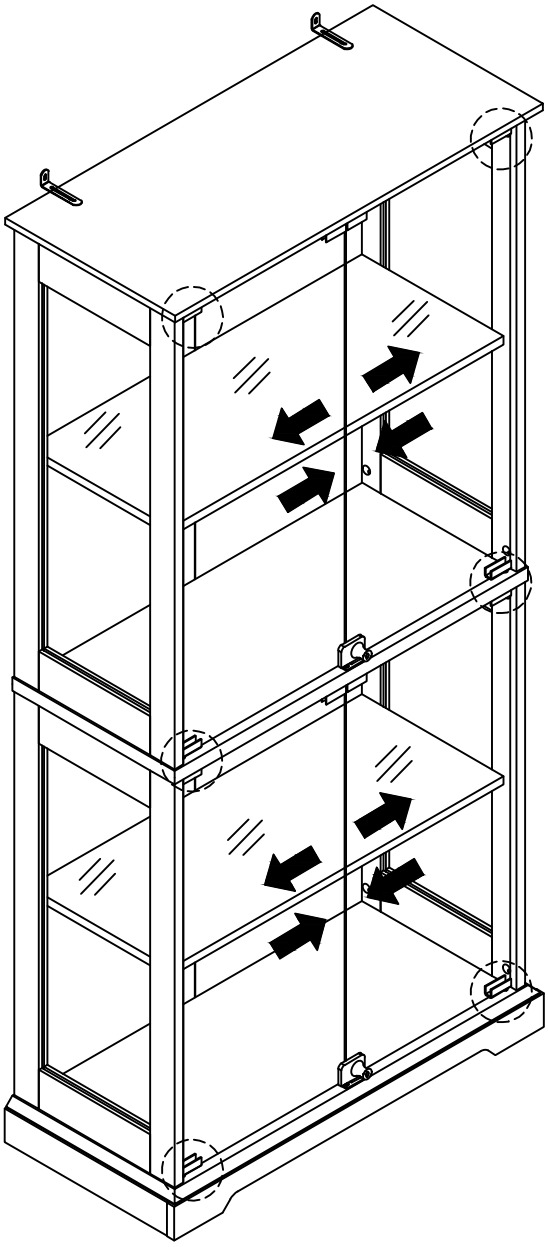

If the door gap is uneven, loosen the screws, adjust the door position left or right as needed, and then retighten the screws.