

ASSEMBLY GUIDE


PACKAGE CONTENTS

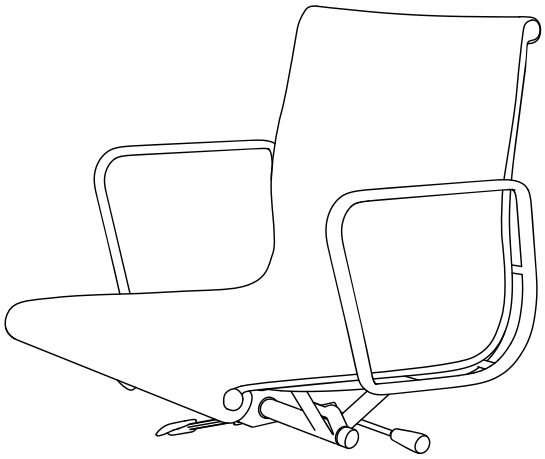


1x Seat




5x Wheels



1x Gas Rod

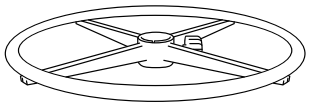


1x Footrest

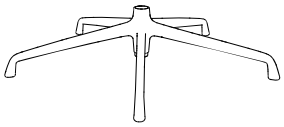


1x Metal Leg


1 Insert the wheel into the hole of metalleg.

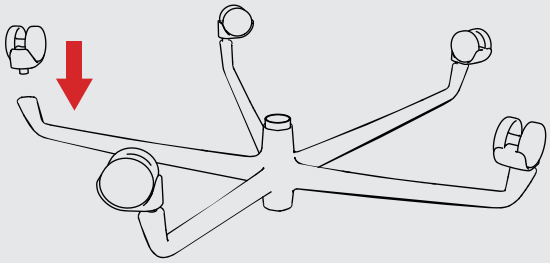


2 Remove the protective cap from the top of the air rod.
Insert the gas rod into the central hole of metalleg.

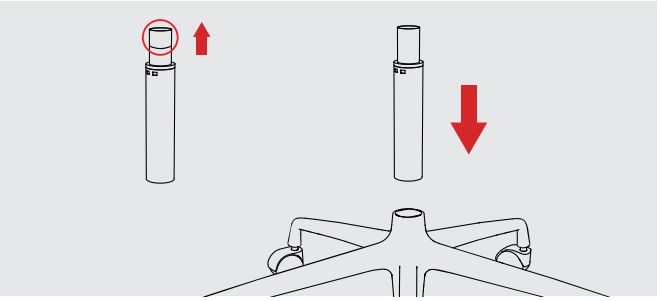

3 Insert the footrest and tighten the handle screw to secure it.
Note: Keep the footrest's inner plastic ring and outer metal ring assembled as one unit.

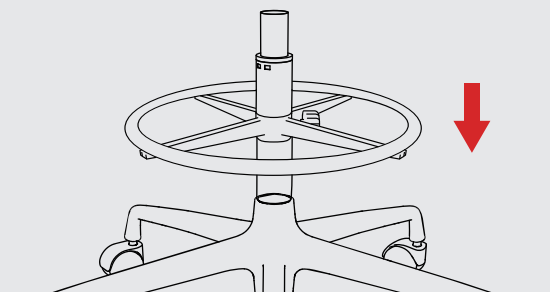

4 Align the installed seat into the top of gas rod.

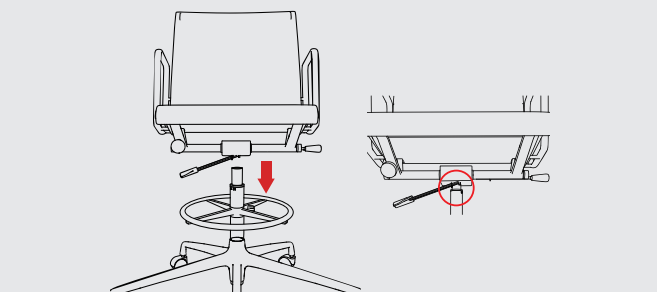

A. Seat height adjuster.

B. Seat tifting tension adjuster.

C. Tift locking handle.

