




10. Screw in self-purchased E26 light sources (power less than 60W).

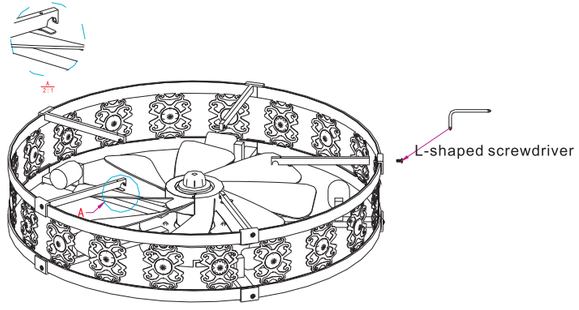


11. Remove screws on the end of mesh support square tube, pass through the outer frame and fasten with the removed screws and L-shaped screwdriver. Note: The arc opening faces the fan blade side, and pry open the clip tab.




12. Clip the bottom mesh cover tightly into the arc opening of square tube, reset the clip to cover the bottom mesh cover.




13. Flip the fixture body, align the clips and tighten with an L-shaped screwdriver.




14. Fix the mounting bracket to the ceiling with dedicated screws.

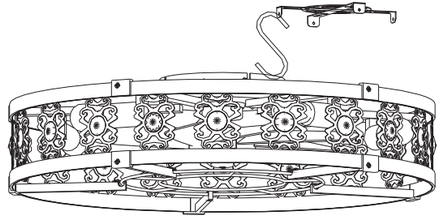

15. Hang the fixture body with an S-hook.

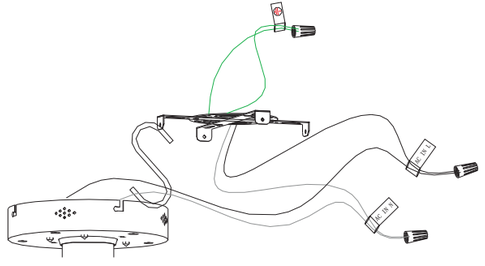


16. Cut off power supply. As shown in the diagram, connect the controller black wire terminal (L) to household live wire, white wire terminal (N) to neutral wire, and fixture ground wire ⏚ to building ground wire respectively.

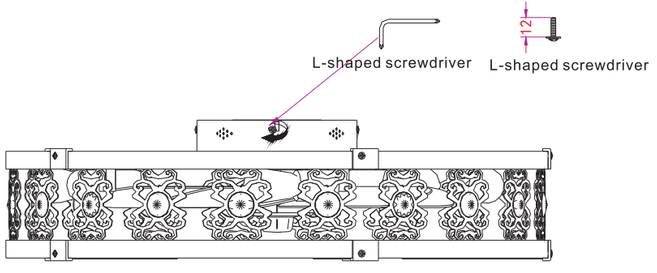


17. Align side holes of fixture and mounting bracket, push fixture flush against ceiling, rotate fixture body to lock screws into bracket slots, then tighten with M4*12 screws with washers. Installation finished.

INSTALLATION INSTRUCTIONS

NO.6067-5

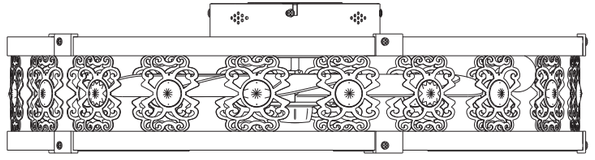

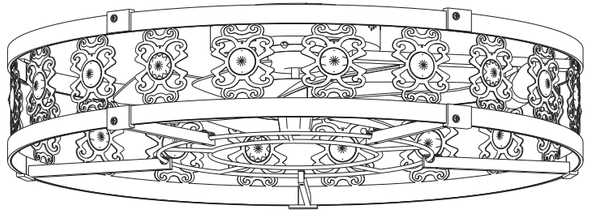


Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.

Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.


Warning!

1. Installation should be performed by a professional.
2. To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3. This light fixture operates within a 110V to 265V range only.
4. Do not install the light fixture in damp conditions.
5. Keep the light fixture away from acidic and corrosive materials.


Package Includes

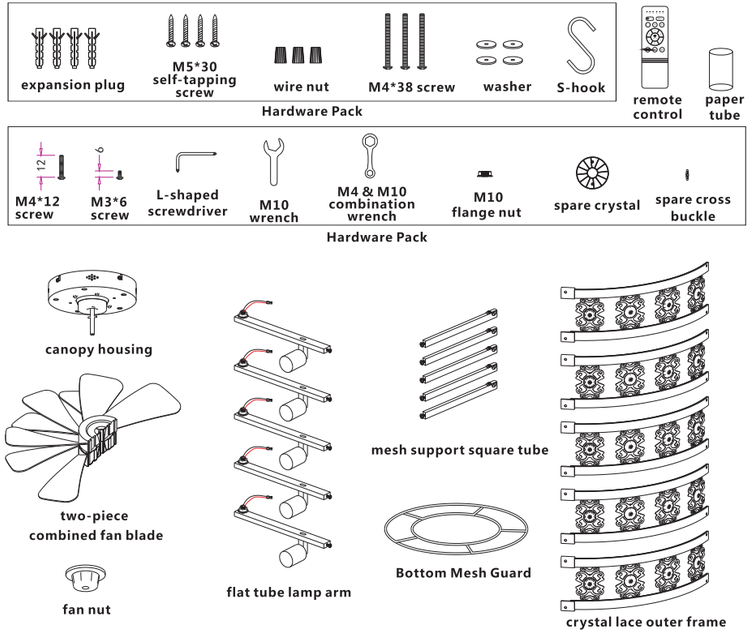


Installation Steps

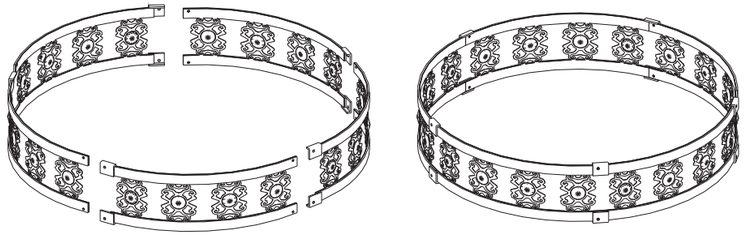


1. Arrange the crystal lace outer mesh frame into a circular shape.

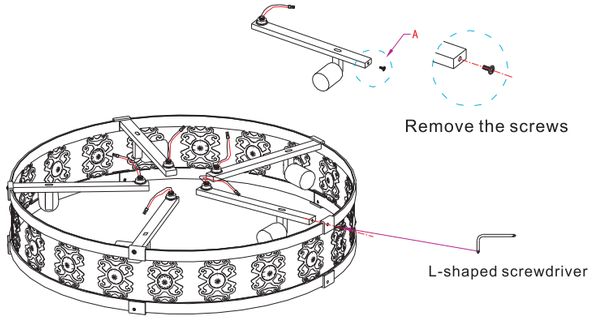


2. Remove the screws on the end of flat tube lamp arms, pass the screws through the crystal lace outer frame with an L-shaped screwdriver, level the flat tube lamp arms and fasten them tight. Note: The nut on the top of flat tube lamp arm faces upward.

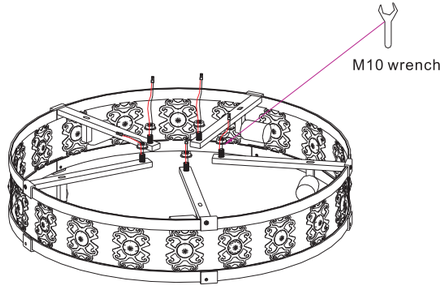


3. Unscrew the nuts on the top surface of flat tube lamp arms.




4. Separate the canopy housing and mounting bracket.

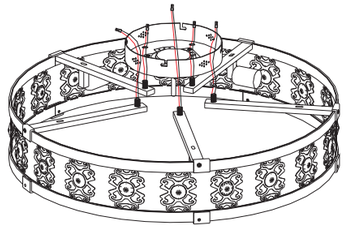


5. Thread the power cord through the holes of canopy housing.

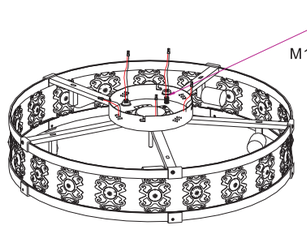


6. Clamp the holes of canopy housing onto the full-thread stud, tighten with the removed nuts and M10 wrench.

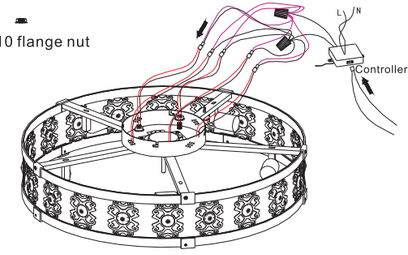

7. Connect the controller, lighting wires and motor wires together.

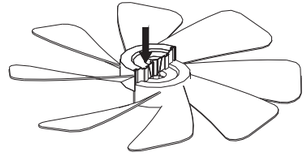

8. Align the clamping positions between two-piece combined fan blades and assemble them into an integral fan blade.

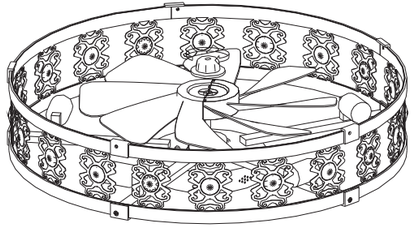

9. Flip the fixture body, install fan blades and tighten blade caps counterclockwise.